



more than you expect

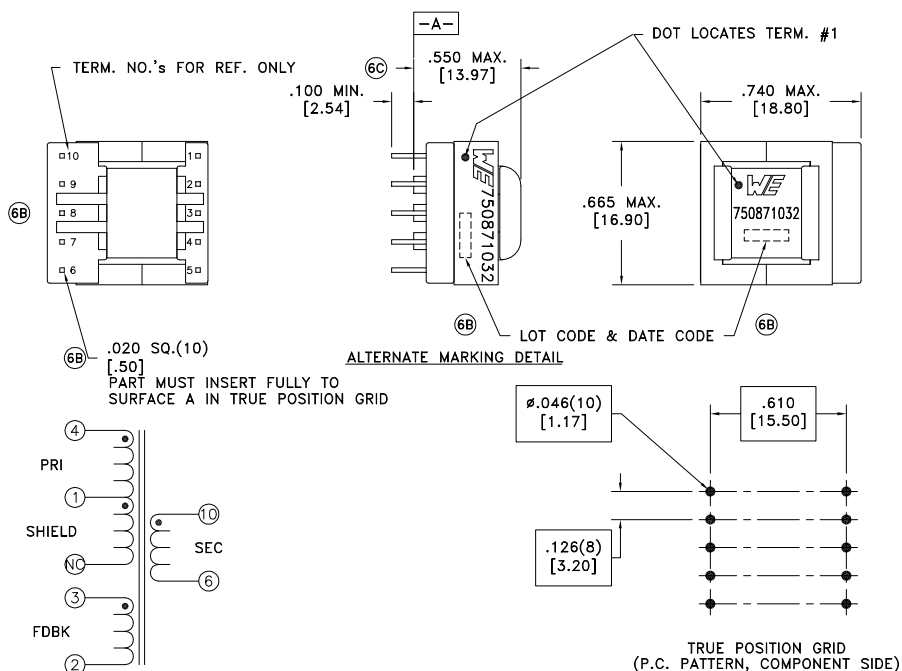

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	2.15 ohms max.
D.C. RESISTANCE	2-3 @20°C	0.050 ohms max.
D.C. RESISTANCE	6-10 @20°C	0.14 ohms max.
INDUCTANCE	1-4 66kHz, 100mVAC, Ls	1.55mH ±10%
LEAKAGE INDUCTANCE	1-4 tie(2+3, 6+10), 100kHz, 100mVAC, Ls	25.0uH typ., 50.0uH max.
DIELECTRIC RATING	4-10 tie(1+3), 3750VAC, 1 second	3000VAC, 1 minute
URNS RATIO	(4-1):(10-6)	7.142:1, ±1%
URNS RATIO	(4-1):(3-2)	7.692:1, ±1%
RESONANT FREQUENCY	-	500kHz min.

REV.	DATE	Packaging Specifications	 CONVENTIONAL PLACEMENT
6C	1/15	Method: Tray	
6B	12/12	PKG-0887 www.we-online.com/midcom	
6A	2/09	SEE REVISION SHEET FOR	
			REVISION LEVEL



Tolerances unless otherwise specified:
Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13]
Fractions: $\pm 1/64$ Footprint: $\pm .005$ [.13]

This drawing is dual dimensioned. Dimensions
in brackets are in millimeters.

eiSos p/n: 750871032



SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[750871032](#)