



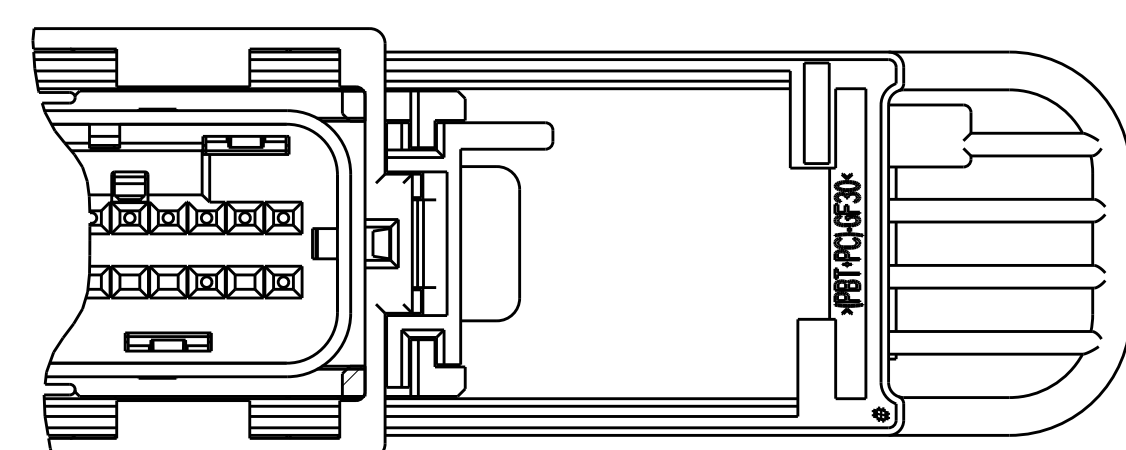


P/N 2-1438521-1 ONLY
WITH CPA



- | | | | | |
|----|-------------|--|---|-------------|
| 9 | BLACK | C 3 | K 99 | 9-1438521-8 |
| | | | | |
| | BLACK | C 143 | K 1 | 2-1438521-8 |
| | BLACK | C 142 | K 1 | 2-1438521-7 |
| | BLACK | C 141 | K 1 | 2-1438521-6 |
| | BLACK | C 140 | K 1 | 2-1438521-5 |
| | BLACK | C 139 | K 1 | 2-1438521-4 |
| | | | | |
| | BLACK | C 138 | K 1 | 2-1438521-2 |
| 10 | BLACK | C 137 | K 1 | 2-1438521-1 |
| | BLACK | C 136 | K 1 | 2-1438521-0 |
| | | | | |
| | | | | |
| | BLACK | C 132 | K 1 | 1-1438521-7 |
| | BLACK | C 131 | K 1 | 1-1438521-6 |
| | BLACK | C 129 | K 1 | 1-1438521-5 |
| | BLACK | C 128 | K 1 | 1-1438521-4 |
| | BLACK | C 127 | K 1 | 1-1438521-3 |
| | BLACK | C 122 | K 1 | 1-1438521-2 |
| | BLACK | C 115 | K 1 | 1-1438521-1 |
| | BLACK | C 109 | K 1 | 1-1438521-0 |
| | BLACK | C 108 | K 1 | 1438521-9 |
| | BLACK | C 107 | K 1 | 1438521-8 |
| | GRAY | C 75 | K 1 | 1438521-7 |
| | BLACK | C 74 | K 1 | 1438521-6 |
| | BLACK | C 73 | K 1 | 1438521-5 |
| | BLACK | C 62 | K 1 | 1438521-4 |
| | BLACK | C 61 | K 1 | 1438521-3 |
| | BLACK | C 49 | K 1 | 1438521-2 |
| | BLACK | C 3 | K 1 | 1438521-1 |
| | SLIDE COLOR | CIRCUIT ARRANGEMENT (SEE TABLE ON SHEET 2) | KEYING ARRANGEMENT (SEE TABLE ON SHEET 2) | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11 FEB 2005 CHK DJ DRUMMOND AVALASEK 11 FEB 2005 AVALASEK 11 FEB 2005		ON SHEET 2) ON SHEET 2)  TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.5 2 PLC ±0.20 3 PLC ±. 4 PLC ±. ANGLES ±.		NAME ASSEMBLY, FEMALE, 60 WAY GET, TCM, CONNECTOR	
MATERIAL FINISH SEE CALLOUT SEE CALLOUT		PRODUCT SPEC - APPLICATION SPEC 114-13060		SIZE A1	
		WEIGHT -		CAGE CODE 100779	
		CUSTOMER DRAWING		DRAWING NO C1438521	
				SCALE 1:1	
				SHEET 1 of 3	
				REV E8	

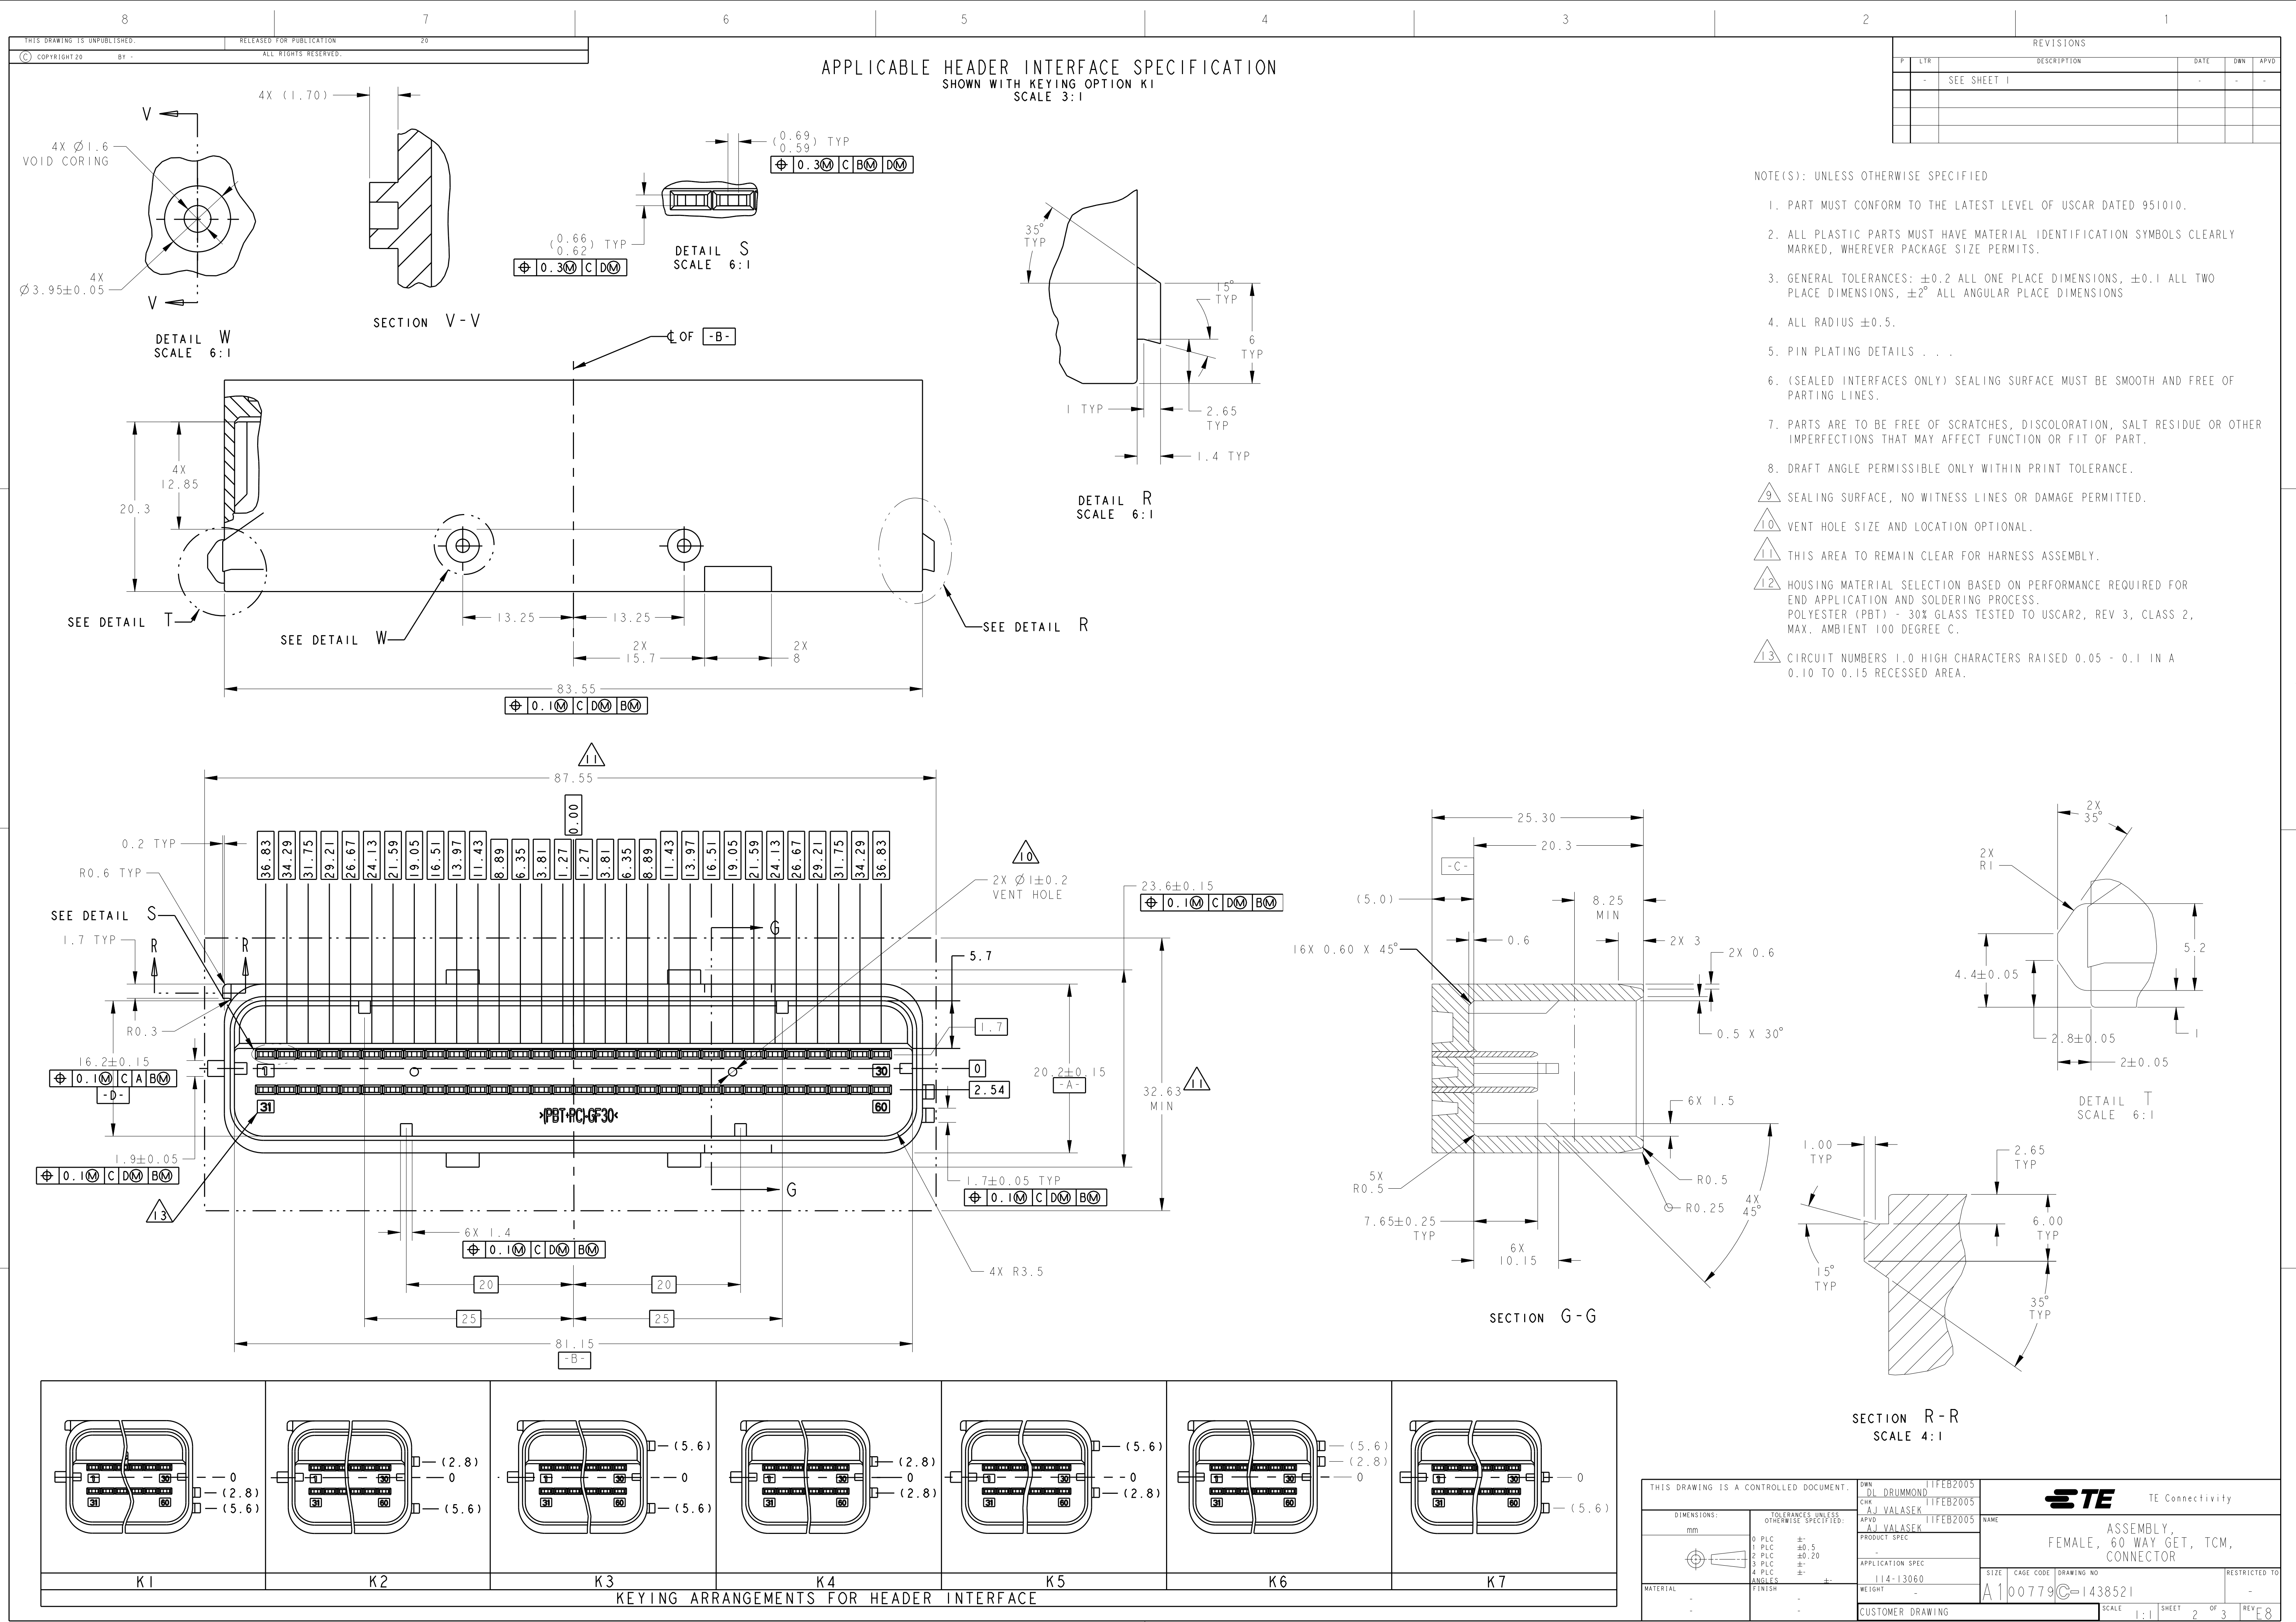

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

- NOTE(S): UNLESS OTHERWISE SPECIFIED
- PART MUST CONFORM TO THE LATEST LEVEL OF USCAR DATED 951010.
 - ALL PLASTIC PARTS MUST HAVE MATERIAL IDENTIFICATION SYMBOLS CLEARLY MARKED, WHEREVER PACKAGE SIZE PERMITS.
 - GENERAL TOLERANCES: ± 0.2 ALL ONE PLACE DIMENSIONS, ± 0.1 ALL TWO PLACE DIMENSIONS, $\pm 2^\circ$ ALL ANGULAR PLACE DIMENSIONS
 - ALL RADIUS ± 0.5 .
 - PIN PLATING DETAILS . . .
 - (SEALED INTERFACES ONLY) SEALING SURFACE MUST BE SMOOTH AND FREE OF PARTING LINES.
 - PARTS ARE TO BE FREE OF SCRATCHES, DISCOLORATION, SALT RESIDUE OR OTHER IMPERFECTIONS THAT MAY AFFECT FUNCTION OR FIT OF PART.
 - DRAFT ANGLE PERMISSIBLE ONLY WITHIN PRINT TOLERANCE.
 - SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.
 - VENT HOLE SIZE AND LOCATION OPTIONAL.
 - THIS AREA TO REMAIN CLEAR FOR HARNESS ASSEMBLY.
 - HOUSING MATERIAL SELECTION BASED ON PERFORMANCE REQUIRED FOR END APPLICATION AND SOLDERING PROCESS.
POLYESTER (PBT) - 30% GLASS TESTED TO USCAR2, REV 3, CLASS 2, MAX. AMBIENT 100 DEGREE C.
 - CIRCUIT NUMBERS 1.0 HIGH CHARACTERS RAISED 0.05 - 0.1 IN A 0.10 TO 0.15 RECESSED AREA.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1438521-4](#)