
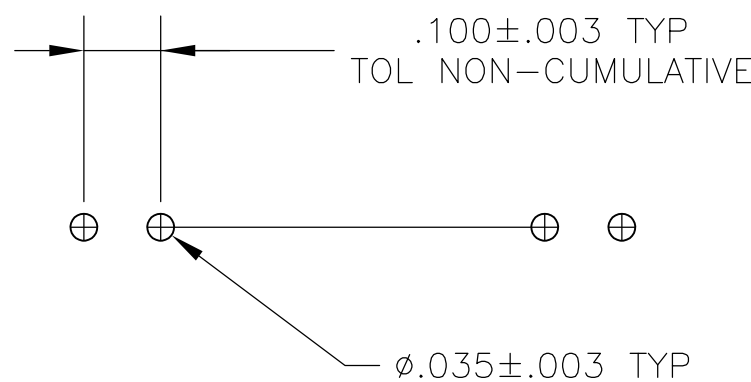



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H	REVISED PER ECO-14-000068	25APR2014	NK	MM

- | | |
|---|---|
| 1 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 2 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 3 | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING |
| 4 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 5 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

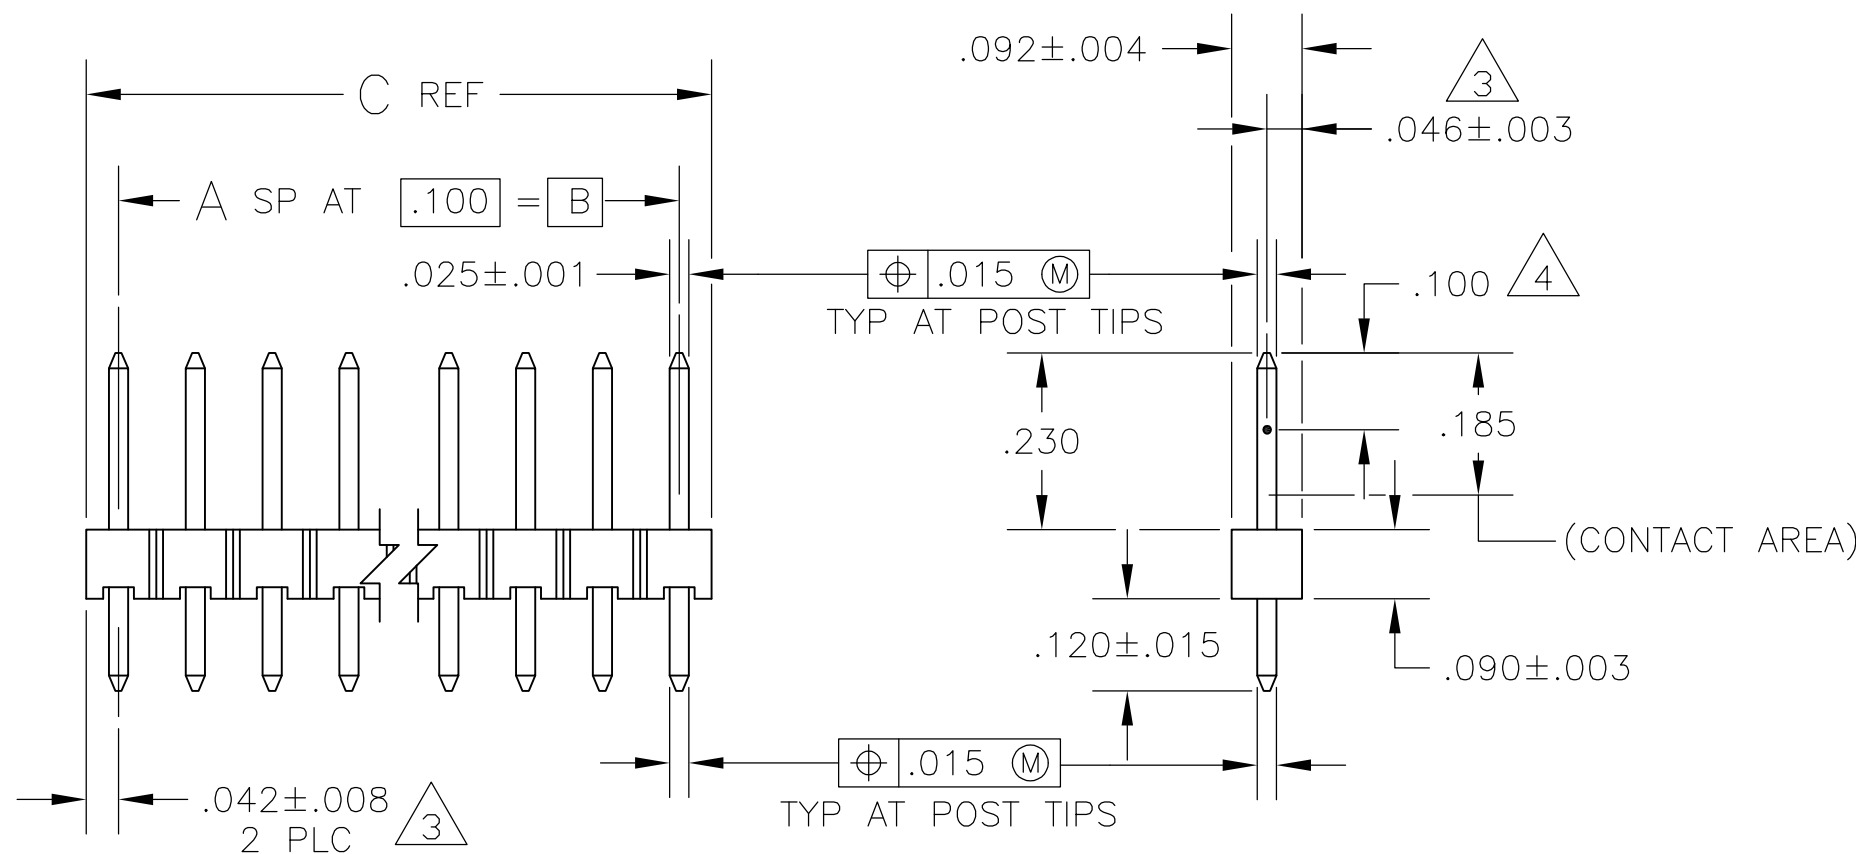

RECOMMENDED HOLE LAYOUT

		3.984	3.900	39	40	4-103185-0
	5	3.884	3.800	38	39	3-103185-9
		3.784	3.700	37	38	3-103185-8
	OBSOLETE	3.684	3.600	36	37	3-103185-7
		3.584	3.500	35	36	3-103185-6
	5	3.484	3.400	34	35	3-103185-5
		3.384	3.300	33	34	3-103185-4
		3.284	3.200	32	33	3-103185-3
		3.184	3.100	31	32	3-103185-2
		3.084	3.000	30	31	3-103185-1
		2.984	2.900	29	30	3-103185-0
		2.884	2.800	28	29	2-103185-9
		2.784	2.700	27	28	2-103185-8
		2.684	2.600	26	27	2-103185-7
	OBSOLETE	2.584	2.500	25	26	2-103185-6
5	OBSOLETE	2.484	2.400	24	25	2-103185-5
		2.384	2.300	23	24	2-103185-4
	5	2.284	2.200	22	23	2-103185-3
		2.184	2.100	21	22	2-103185-2
		2.084	2.000	20	21	2-103185-1
		1.984	1.900	19	20	2-103185-0
	5	1.884	1.800	18	19	1-103185-9
		1.784	1.700	17	18	1-103185-8
		1.684	1.600	16	17	1-103185-7
		1.584	1.500	15	16	1-103185-6
5	SUPERCEDED BY 6-146280-5	1.484	1.400	14	15	1-103185-5
	5	1.384	1.300	13	14	1-103185-4
		OBSOLETE	1.284	1.200	12	13
		1.184	1.100	11	12	1-103185-2
5	SUPERCEDED BY 6-146280-0	1.084	1.000	10	11	1-103185-1
		.984	.900	9	10	1-103185-0
		.884	.800	8	9	103185-9
		.784	.700	7	8	103185-8
		.684	.600	6	7	103185-7
		.584	.500	5	6	103185-6
		.484	.400	4	5	103185-5
		.384	.300	3	4	103185-4
		.284	.200	2	3	103185-3
		.184	.100	1	2	103185-2
		.084	—	—	1	103185-1
		C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO.	130C2187		 TE Connectivity
		MATERIAL	H. MOLLY		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPROVED BY	200C2187	NAME: _____ HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS
INCHES			DATE	200C2187	
	0	PLC	±		
	1	PLC	±		
	2	PLC	±		
	3	PLC	±		PRODUCT SPEC _____ APPLICATION SPEC _____
	4	PLC	±.005		
	5	PLC	±		
	6	PLC	±		
	7	PLC	±		
	8	PLC	±		
	9	PLC	±		
	10	PLC	±		
	11	PLC	±		
	12	PLC	±		
	13	PLC	±		
	14	PLC	±		
	15	PLC	±		
	16	PLC	±		
	17	PLC	±		
	18	PLC	±		
	19	PLC	±		
	20	PLC	±		
	21	PLC	±		
	22	PLC	±		
	23	PLC	±		
	24	PLC	±		
	25	PLC	±		
	26	PLC	±		
	27	PLC	±		
	28	PLC	±		
	29	PLC	±		
	30	PLC	±		
	31	PLC	±		
	32	PLC	±		
	33	PLC	±		
	34	PLC	±		
	35	PLC	±		
	36	PLC	±		
	37	PLC	±		
	38	PLC	±		
	39	PLC	±		
	40	PLC	±		
	41	PLC	±		
	42	PLC	±		
	43	PLC	±		
	44	PLC	±		
	45	PLC	±		
	46	PLC	±		
	47	PLC	±		
	48	PLC	±		
	49	PLC	±		
	50	PLC	±		
	51	PLC	±		
	52	PLC	±		
	53	PLC	±		
	54	PLC	±		
	55	PLC	±		
	56	PLC	±		
	57	PLC	±		
	58	PLC	±		
	59	PLC	±		
	60	PLC	±		
	61	PLC	±		
	62	PLC	±		
	63	PLC	±		
	64	PLC	±		
	65	PLC	±		
	66	PLC	±		
	67	PLC	±		
	68	PLC	±		
	69	PLC	±		
	70	PLC	±		
	71	PLC	±		
	72	PLC	±		
	73	PLC	±		
	74	PLC	±		
	75	PLC	±		
	76	PLC	±		
	77	PLC	±		
	78	PLC	±		
	79	PLC	±		
	80	PLC	±		
	81	PLC	±		
	82	PLC	±		
	83	PLC	±		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103185-3](#)