

1W, 10V - 200V Glass Passivated Junction Silicon Zener Diode

FEATURES

- Glass passivated chip junction
- Low profile package
- Built-in strain relief
- Low inductance
- Typical IR less than 5 μ A above 11V
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: DO-204AL (DO-41)
- Molding compound meets UL 94 V-0 flammability rating
- Part no. with suffix "H" means AEC-Q101 qualified
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Pure tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Weight: 0.3g (approximately)

| KEY PARAMETERS | | |
|-----------------------|------------------|--------------|
| PARAMETER | VALUE | UNIT |
| V_Z | 10 - 200 | V |
| Test current I_{ZT} | 1.2 - 25 | mA |
| P_{tot} | 1 | W |
| $T_{J\ MAX}$ | 150 | $^{\circ}$ C |
| Package | DO-204AL (DO-41) | |
| Configuration | Single Die | |



DO-204AL (DO-41)

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}$ C unless otherwise noted) | | | |
|---|-----------|-------------|------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Power dissipation at $T_A=50^{\circ}$ C Derate above 50° C (Note 1) | P_{tot} | 1.00 | Watts |
| | | 6.67 | mW/ $^{\circ}$ C |
| Operating junction temperature range | T_J | -55 to +150 | $^{\circ}$ C |
| Storage temperature range | T_{STG} | -55 to +150 | $^{\circ}$ C |

Note:

1. Mounted on Cu-Pad size 5mm x 5mm

| ORDERING INFORMATION | | | | | |
|-------------------------------|-----------------------|---------------------|----------------------------|----------------|-------------------------------------|
| PART NO. | PARTNO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING |
| 1N47xxA 1MxxxZ (Note 1) | H | A0 | G | DO-41 | 3,000 / Ammo box (52mm taping) |
| | | R0 | | DO-41 | 5,000 / 13" Paper reel |
| | | R1 | | DO-41 | 5,000 / 13" Paper reel (Reverse) |
| | | B0 | | DO-41 | 1,000 / Bulk packing |

Notes :

- "xx" defines voltage from 10V (1N4740A) to 200V (1M200Z)

| EXAMPLE | | | | | |
|--------------------|-----------------|------------------------|---------------------|----------------------------|--------------------------------------|
| EXAMPLE P/N | PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION |
| 1N4740AHA0G | 1N4740A | H | A0 | G | AEC-Q101 qualified Green compound |

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted) | | | | | | | | | | |
|--|----------------------------------|------------------------------|--------|-----------------|----------------------------------|----------------------------------|------|--------------------------------|-------|----------------|
| Device (Note 1) | Zener voltage | | | Test current | Zener Impedance | | | Leakage current | | Surge current |
| | V _Z @ I _{ZT} | | | I _{ZT} | Z _{ZT} @I _{ZT} | Z _{ZK} @I _{ZK} | | I _R @V _R | | I _R |
| | V | | | mA | Ω | Ω | mA | μA | V | mA |
| | Min. | Nom. (Note 2) (Note 3) | Max. | | | | | Max. | | |
| 1N4740A | 9.50 | 10 | 10.50 | 25.0 | 7 | 700 | 0.25 | 10 | 7.6 | 454 |
| 1N4741A | 10.45 | 11 | 11.55 | 23.0 | 8 | 700 | 0.25 | 5 | 8.4 | 414 |
| 1N4742A | 11.40 | 12 | 12.60 | 21.0 | 9 | 700 | 0.25 | 5 | 9.1 | 380 |
| 1N4743A | 12.35 | 13 | 13.65 | 19.0 | 10 | 700 | 0.25 | 5 | 9.9 | 344 |
| 1N4744A | 14.25 | 15 | 15.75 | 17.0 | 14 | 700 | 0.25 | 5 | 11.4 | 304 |
| 1N4745A | 15.20 | 16 | 16.80 | 15.5 | 16 | 700 | 0.25 | 5 | 12.2 | 285 |
| 1N4746A | 17.10 | 18 | 18.90 | 14.0 | 20 | 750 | 0.25 | 5 | 13.7 | 250 |
| 1N4747A | 19.00 | 20 | 21.00 | 12.5 | 22 | 750 | 0.25 | 5 | 15.2 | 225 |
| 1N4748A | 20.90 | 22 | 23.10 | 11.5 | 23 | 750 | 0.25 | 5 | 16.7 | 205 |
| 1N4749A | 22.80 | 24 | 25.20 | 10.5 | 25 | 750 | 0.25 | 5 | 18.2 | 190 |
| 1N4750A | 25.65 | 27 | 28.35 | 9.5 | 35 | 750 | 0.25 | 5 | 20.6 | 170 |
| 1N4751A | 28.50 | 30 | 31.50 | 8.5 | 40 | 1000 | 0.25 | 5 | 22.8 | 150 |
| 1N4752A | 31.35 | 33 | 34.65 | 7.5 | 45 | 1000 | 0.25 | 5 | 25.1 | 135 |
| 1N4753A | 34.20 | 36 | 37.80 | 7.0 | 50 | 1000 | 0.25 | 5 | 27.4 | 125 |
| 1N4754A | 37.05 | 39 | 40.95 | 6.5 | 60 | 1000 | 0.25 | 5 | 29.7 | 115 |
| 1N4755A | 40.85 | 43 | 45.15 | 6.0 | 70 | 1500 | 0.25 | 5 | 32.7 | 110 |
| 1N4756A | 44.65 | 47 | 49.35 | 5.5 | 80 | 1500 | 0.25 | 5 | 35.8 | 95 |
| 1N4757A | 48.45 | 51 | 53.55 | 5.0 | 95 | 1500 | 0.25 | 5 | 38.8 | 90 |
| 1N4758A | 53.20 | 56 | 58.80 | 4.5 | 110 | 2000 | 0.25 | 5 | 42.6 | 80 |
| 1N4759A | 58.90 | 62 | 65.10 | 4.0 | 125 | 2000 | 0.25 | 5 | 47.1 | 70 |
| 1N4760A | 64.60 | 68 | 71.40 | 3.7 | 150 | 2000 | 0.25 | 5 | 51.7 | 65 |
| 1N4761A | 71.25 | 75 | 78.75 | 3.3 | 175 | 2000 | 0.25 | 5 | 56.0 | 60 |
| 1N4762A | 77.90 | 82 | 86.10 | 3.0 | 200 | 3000 | 0.25 | 5 | 62.2 | 55 |
| 1N4763A | 86.45 | 91 | 95.55 | 2.8 | 250 | 3000 | 0.25 | 5 | 69.2 | 50 |
| 1N4764A | 95.00 | 100 | 105.00 | 2.5 | 350 | 3000 | 0.25 | 5 | 76.0 | 45 |
| 1M110Z | 104.50 | 110 | 115.50 | 2.3 | 450 | 4000 | 0.25 | 5 | 83.6 | - |
| 1M120Z | 114.00 | 120 | 126.00 | 2.0 | 550 | 4500 | 0.25 | 5 | 91.2 | - |
| 1M130Z | 123.50 | 130 | 136.50 | 1.9 | 700 | 5000 | 0.25 | 5 | 98.8 | - |
| 1M150Z | 142.50 | 150 | 157.50 | 1.7 | 1000 | 6000 | 0.25 | 5 | 114.0 | - |
| 1M160Z | 152.00 | 160 | 168.00 | 1.6 | 1100 | 6500 | 0.25 | 5 | 121.6 | - |
| 1M180Z | 171.00 | 180 | 189.00 | 1.4 | 1200 | 7000 | 0.25 | 5 | 136.8 | - |
| 1M200Z | 190.00 | 200 | 210.00 | 1.2 | 1500 | 8000 | 0.25 | 5 | 152.0 | - |

Notes :

1. Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$
2. Specials Available Include:
 - A. Nominal zener voltages between the voltages shown and tighter voltage tolerances
 - B. Matched sets
3. Zener Voltage (V_z) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (TL) at $30^\circ\text{C} \pm 1^\circ\text{C}$, from the diode body
4. Zener Impedance (Z_z) Derivation. The zener impedance is derived from the 60 cycle AC voltage, which results when an AC current having an RMS value equal to 10% of the DC zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} .
5. Surge Current (I_R) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, I_{ZT} per JEDEC registration; however, actual device capability is as described in Figure 11.

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Power Temperature Derating Curve

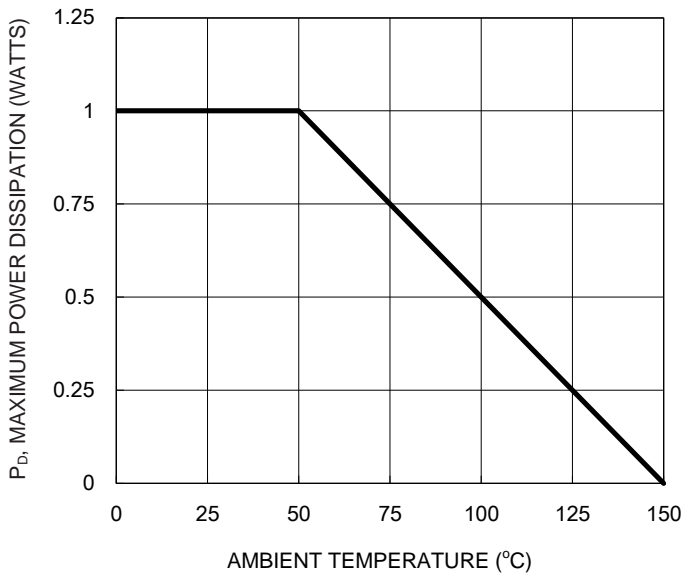


Fig.2 Typical Forward Characteristics

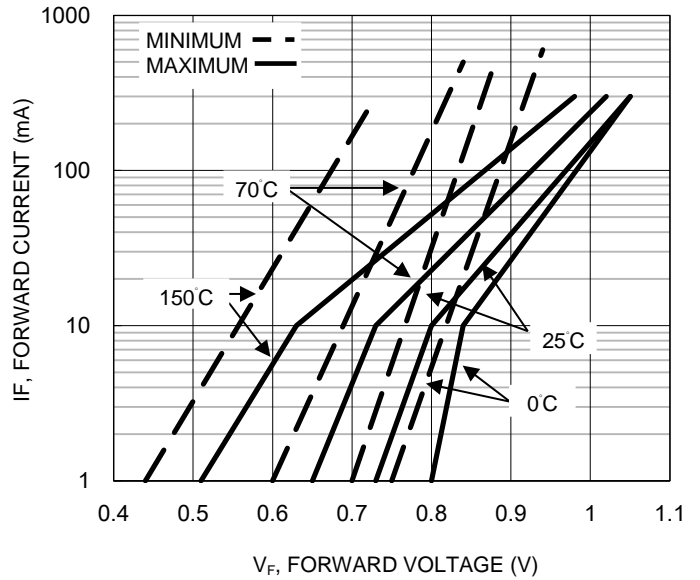


Fig.3 Effect Of Zener Current On Zener impedance


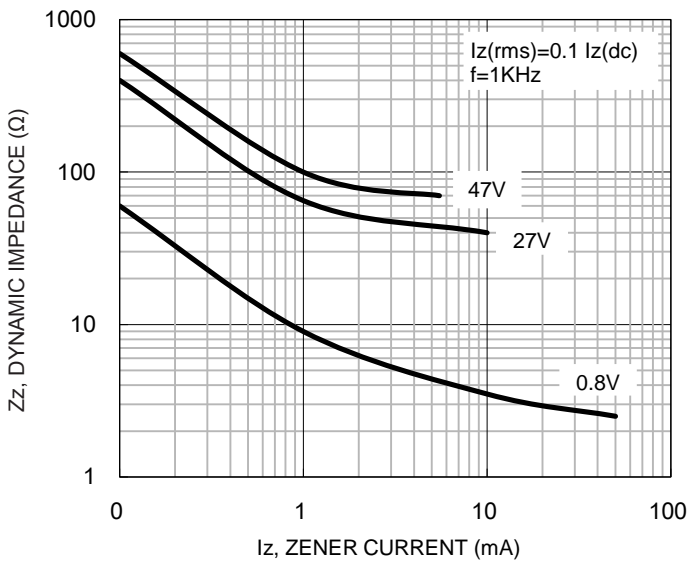


Fig.4 Effect Of Zener Voltage On Zener Impedance

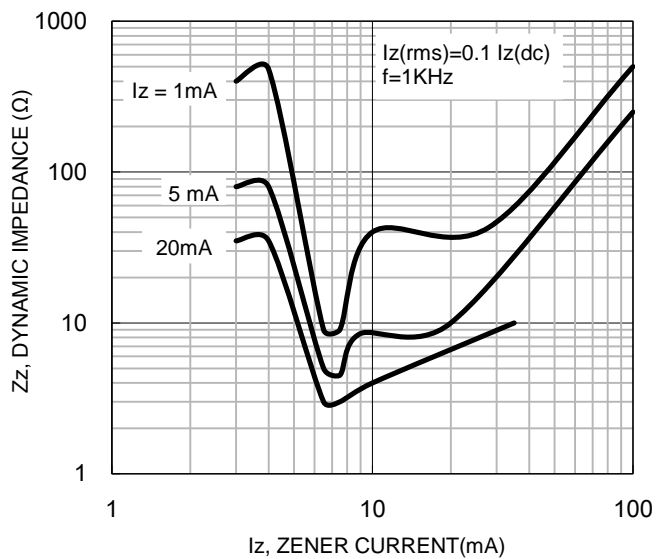

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig5. Typical Leakage Current

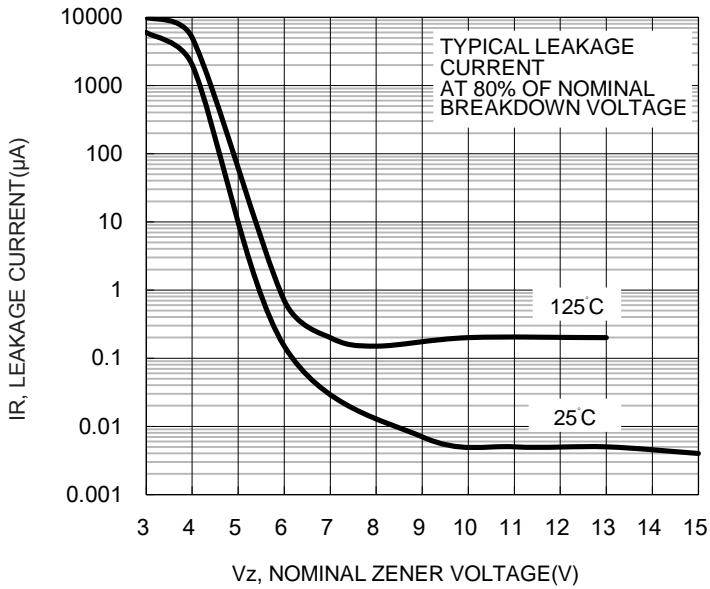


Fig6. Typical Capacitance versus V_z

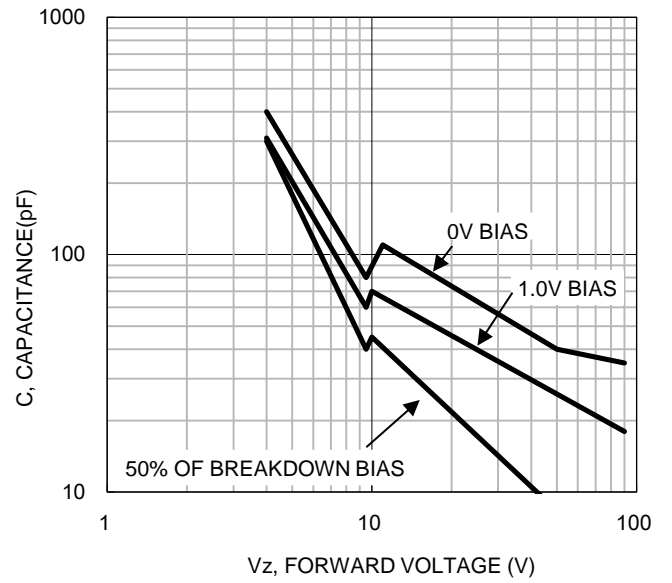


Fig7. Temperature Coefficients


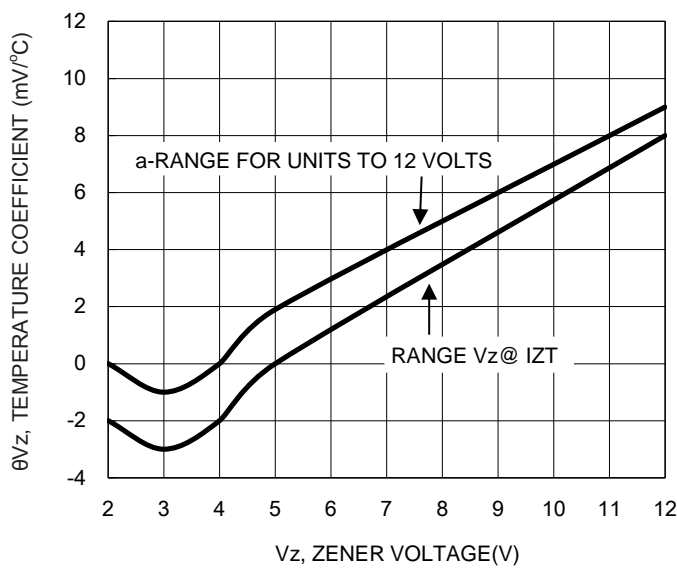


Fig8. Temperature Coefficients

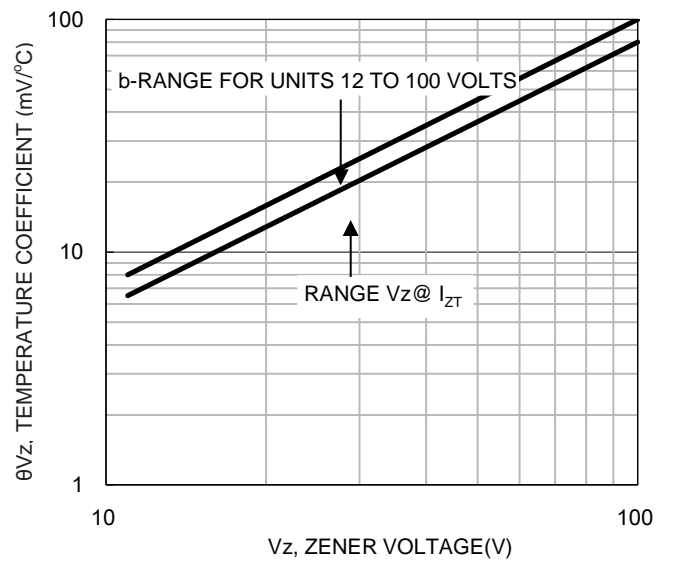

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig9. Effect Of Zener Current

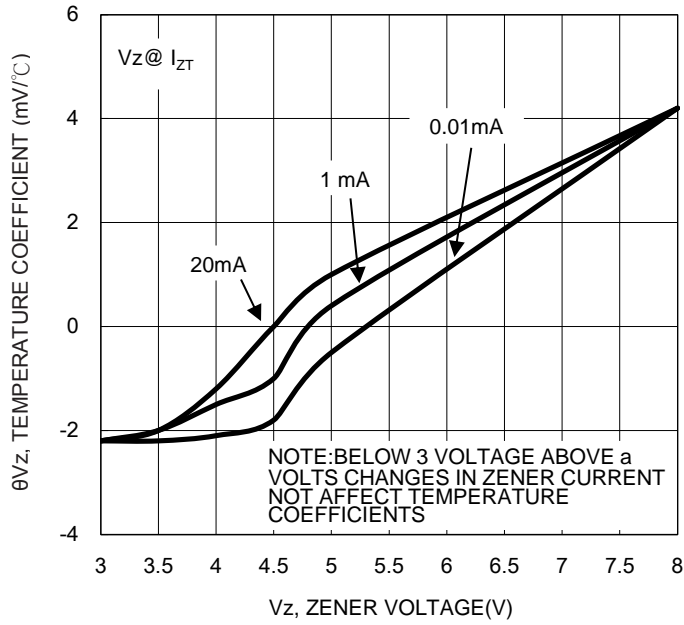


Fig10. Typical Thermal Resistance versus Lead Length



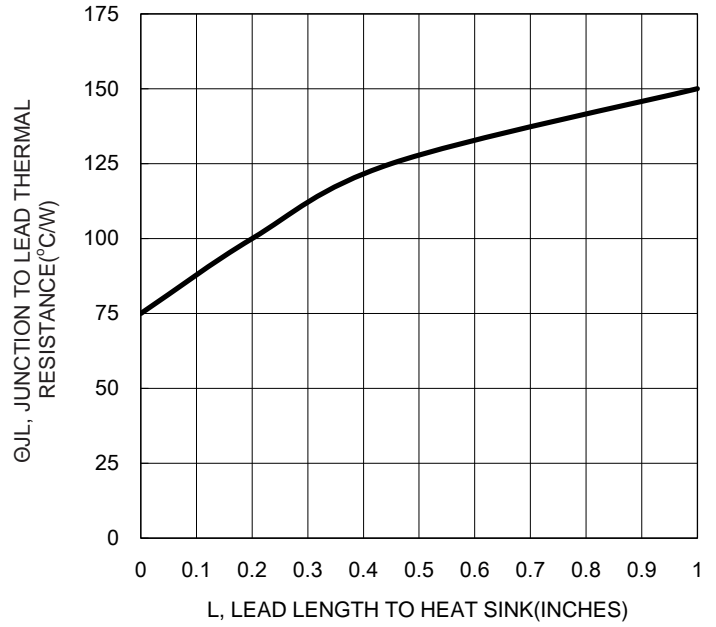


Fig11. Maximum Surge Power

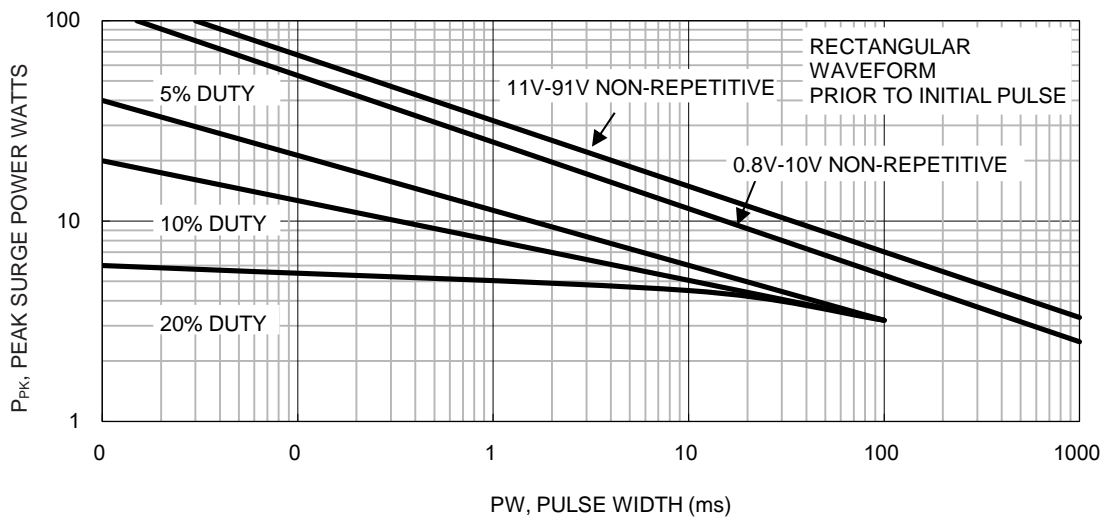

PACKAGE OUTLINE DIMENSIONS

DO-204AL (DO-41)

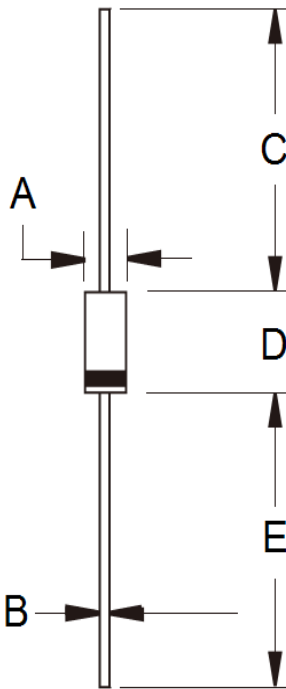

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 2.00 | 2.70 | 0.079 | 0.106 |
| B | 0.71 | 0.86 | 0.028 | 0.034 |
| C | 25.40 | - | 1.000 | - |
| D | 4.20 | 5.20 | 0.165 | 0.205 |
| E | 25.40 | - | 1.000 | - |

MARKING DIAGRAM



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[1M110Z](#) [1M120Z](#) [1M130Z](#) [1M150Z](#) [1M160Z](#) [1M180Z](#) [1M200Z](#) [1N4741A](#) [1N4742A](#) [1N4743A](#) [1N4744A](#)
[1N4745A](#) [1N4746A](#) [1N4747A](#) [1N4748A](#) [1N4749A](#) [1N4750A](#) [1N4751A](#) [1N4752A](#) [1N4753A](#) [1N4754A](#) [1N4755A](#)
[1N4756A](#) [1N4757A](#) [1N4758A](#) [1N4759A](#) [1N4760A](#) [1N4761A](#) [1N4762A](#) [1N4763A](#) [1N4764A](#) [1N4740A](#) [1N4740A](#)
[R0](#) [1N4748A R0](#) [1N4762A R0](#) [1N4747A R0](#) [1N4741A R0](#) [1N4743A R0G](#) [1N4746AHR0](#) [1M150ZHR0G](#) [1N4740A](#)
[R0G](#) [1N4743AHR0](#) [1N4761A R0G](#) [1M130ZHR0G](#) [1N4758AHR0](#) [1N4754AHR0G](#) [1N4746AHR0G](#) [1N4764A R0G](#)
[1N4756A R0G](#) [1N4745AHR0G](#) [1N4745AHR0](#) [1N4752A R0G](#) [1N4758AHR0G](#) [1M120ZHR0](#) [1N4748AHR0](#)
[1N4761AHR0G](#) [1M160ZHR0](#) [1N4763A R0G](#) [1M120Z R0G](#) [1N4747A R0G](#) [1N4744AHR0](#) [1N4753A R0G](#)
[1M200ZHR0](#) [1M180ZHR0](#) [1N4742AHR0G](#) [1N4751AHR0G](#) [1N4760A R0G](#) [1N4746A R0G](#) [1N4759AHR0G](#)
[1N4753AHR0](#) [1N4744AHR0G](#) [1N4741A R0G](#) [1M110ZHR0G](#) [1N4760AHR0G](#) [1N4743AHR0G](#) [1N4741AHR0G](#)
[1N4763AHR0](#) [1N4757A R0G](#) [1N4762A R0G](#) [1N4744A R0G](#) [1N4752AHR0G](#) [1N4750AHR0G](#) [1N4756AHR0](#)
[1M160Z R0G](#) [1N4750AHR0](#) [1M130ZHR0](#) [1N4748A R0G](#) [1N4764AHR0](#) [1M180ZHR0G](#) [1N4761AHR0](#) [1N4750A](#)
[R0G](#) [1N4755AHR0](#) [1N4751A R0G](#) [1N4740AHR0G](#) [1N4741AHR0](#) [1N4752AHR0](#) [1N4749AHR0G](#) [1M110ZHR0](#)
[1M200Z R0G](#) [1N4763AHR0G](#)