

5





4

3

2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

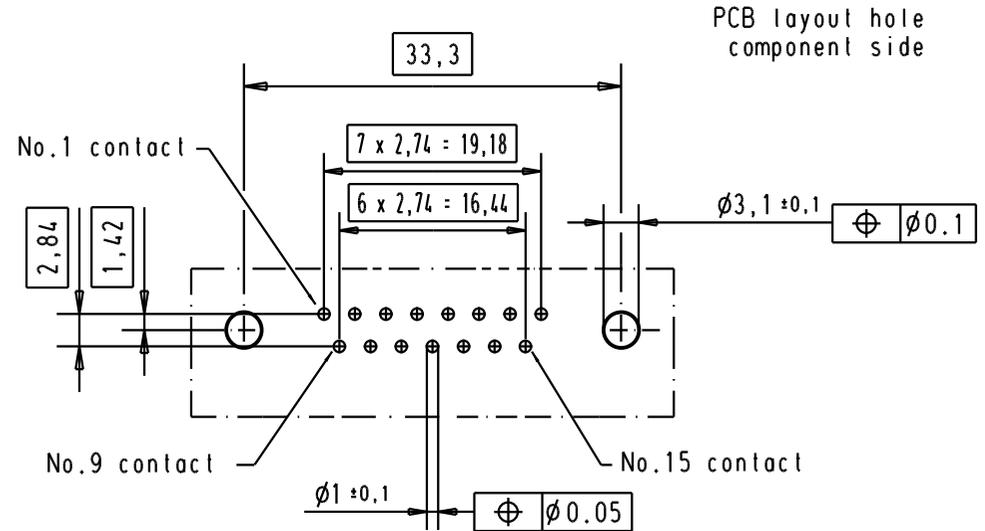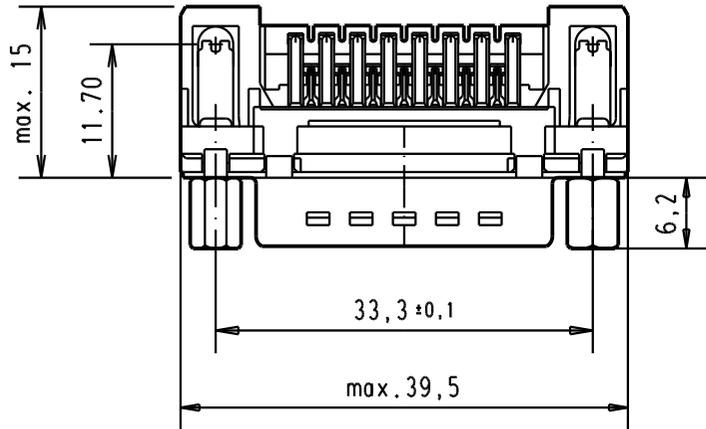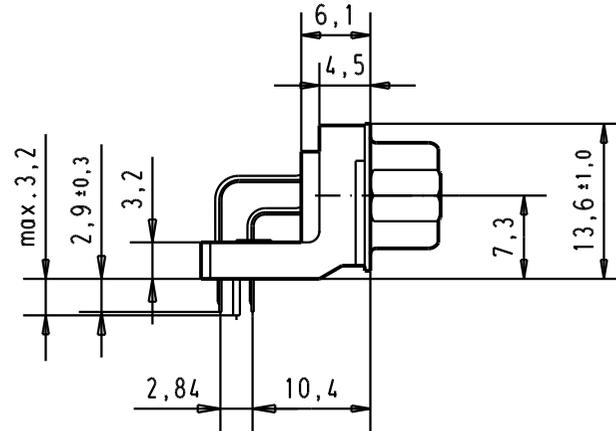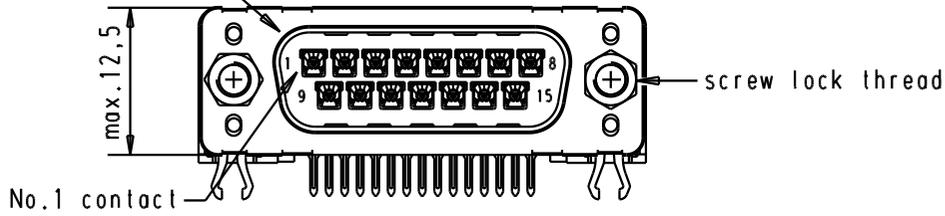

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 263 3833	M3	1				
09 65 263 6833	M3	2				
09 65 263 7833	M3	3				
09 65 263 3813	4-40 UNC	1				
09 65 263 6813	4-40 UNC	2	31892	22/04/04	JH	
09 65 263 7813	4-40 UNC	3	31084	04/SEP/02	YT	
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	

	Dat.	Name
Detail.	04/SEP/02	YT
Insp.		
Stand.		



D-Sub, male, standard angle,
15 poles, with solder pin,
screw lock, grounding board lock.

Moßstab/
Scale
1.5:1

HARTING EUROL
F-95972 Paris



TB 0965263x8x3

Blatt/ Page
1

Sub.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09652636813](#)