

Elastische Einpresszone / *compliant pressfit zone*

Isolierwerkstoff / *housing material* : PBT GF30

Bauart 7 / *type 7*

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Masse und Angaben gemäß IEC 60 603-2 / *DIN EN 60 603-2*

Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6

diameter of drilled hole see drawing 164062/No.6

1) $\phi 1,0 \pm 0,09$ Durchmesser des metallisierten Loches

$\phi 1,0 \pm 0,09$ *Diameter of finished plated-through hole*


Bedruckung siehe Zeichnung 294875

Marking see drawing 294875


ohne Flansch
without flange

Bestückungsplan / *contact layout*

■ bestückt / *assemble*

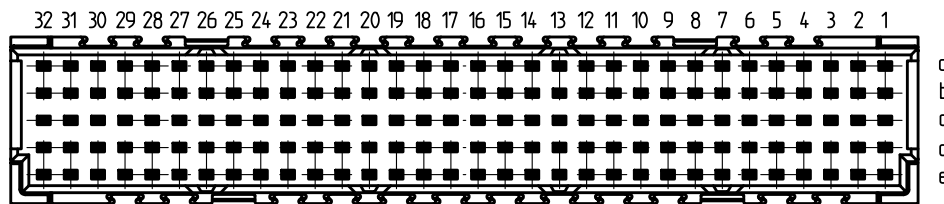

Leiterplatten-Lochbild / *PCB drillhole pattern*

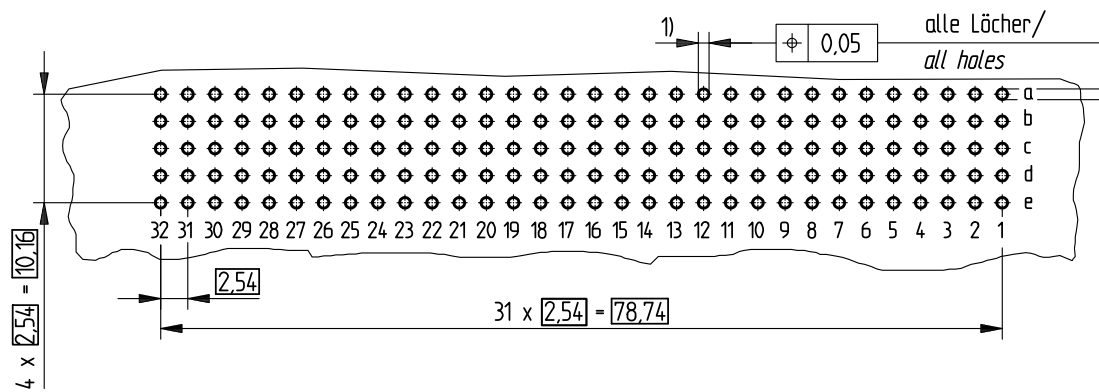

Consider protection memo from DIN 34

Information:	Tolerances	All Dimensions in mm	Scale	2:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation	Federleiste E 160 EE <i>Fem. Connector E 160 Pressfit</i>	
	www.ERNI.com	254124	1	
Index	Date	H:00064485.SZA	STVE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254124](#)