4803, Line Socket, solder terminal, screened, 6.3 mm, 3-pole, straight, UK-Connector





References

Alternative: Housing insulated Last order date: 30.06.2016

Description


- Solder terminal :

- Data and Signal transfer
- Data and Signal Connectors 3-pole , shielded , straight


Technical Data

Diameter	6.3 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	3-pole	 Terminal	solder terminal
Ratings DC	2A/12VDC	Housings	screened
Ratings AC	2 A / 12 VAC	Style	straight
Dielectric Strength	1000 VDC	Lifetime	10000 Insertions
Insulation Resistance	> 10000 MΩ @ 500 VDC		

Dimensions

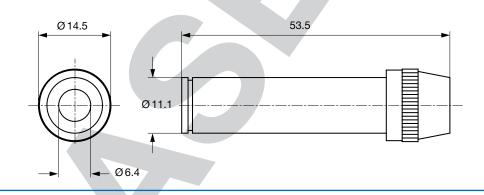

Diagrams



Appliance inlet | ELECTRONIC COMPONENTS | 1 |

4803.3300

All Variants					
Product group	Diameter [mm]	Number of Poles	Terminal	Order Number	
Data and Signal Plug/ Sockets	6.3	3-pole	solder terminal	4803.3300	
Most Popular.					
Availability for all produ	ucts can be searched re	eal-time:http://www.schur	ter.com/Stock-Check/Sto	ock-Check-SCHURTER	
Packaging unit	100 Pcs				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter: 4803.3300