




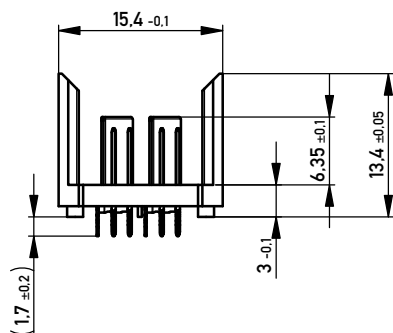

Kontaktversionen, Messerkontakte
Contact Selection Options, Male Contacts

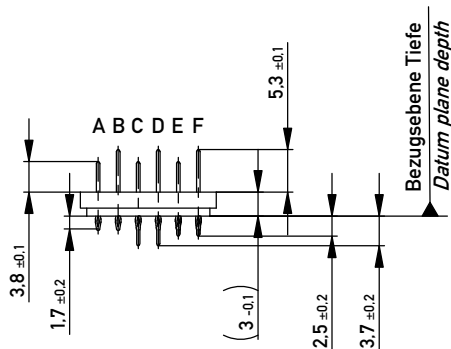

Kontaktversionen, Schirmmesser
Contact Selection Options, Shielding Contacts

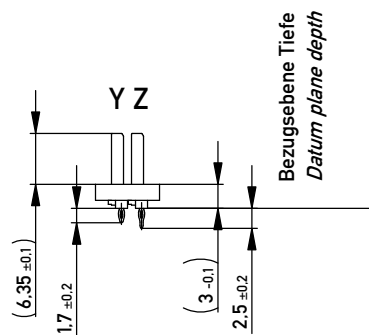

1) $\phi 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\phi 0.6 \pm 0.05$ Diameter of finished plated-through hole


$\phi 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\phi 0.7 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406
Metal plating of plated-through hole
see drawing 114406


Information: B + Y
siehe Bestückungsplan
see contact layout
Anforderungsstufe 2 / class 2

Anforderungsstufe
class


Date Code



EN-Zone für durchkontaktierte Löcher $\phi 0.6 \pm 0.05$
compliant zone for through hole $\phi 0.6 \pm 0.05$

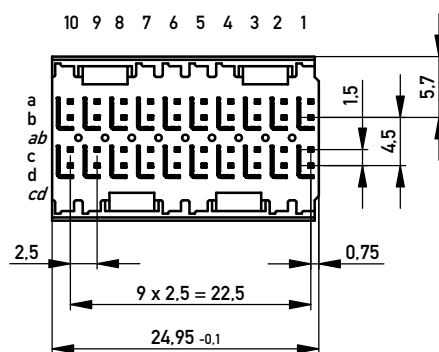


Bestückungsplan - contact layout



Lochbild für Leiterplatte
(Bestückungsseite)

Board hole pattern
(Component mounting side)

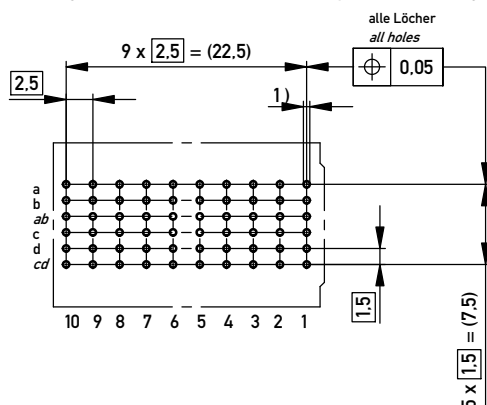

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								ERmetZD Messerleiste 2-10 <i>ERmetZD male connector 2-10</i>			
								www.ERNI.com			
c		21.06.2012								A3	
Index		Date						Class		ERMZD	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[973063](#)