




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 (C) COPYRIGHT - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
J	-	P	LTR	DESCRIPTION
		C2		REVISED PER ECR-14-013099
			DATE	DWN
			09DEC2014	NK
				APVD
				GJ

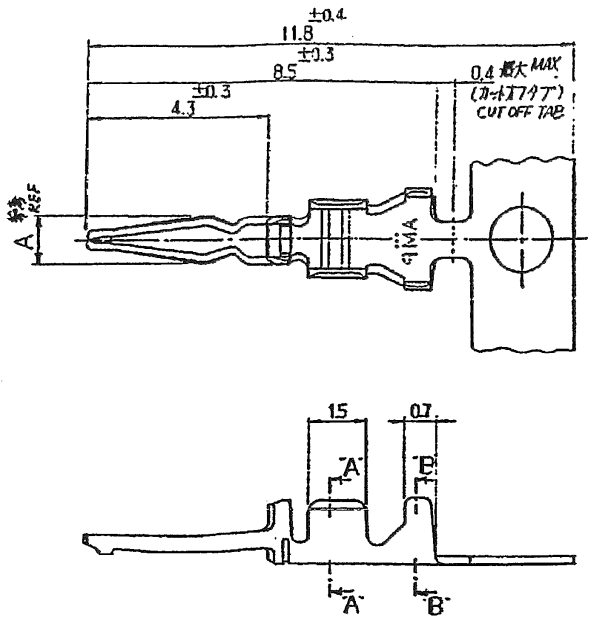

断面 A-A  
SECT

断面 B-B  
SECT

- NOTES:
- APPLICABLE HDR HSG :172520(2.5PITCH)  
:172890(2.0PITCH)
  - PRODUCT SPEC:108-5163
  - CRIMPING SPEC:114-5062  
COMMON APPLICATOR FOR 2/2.5MM PITCH  
HDR HSG:P/N 755764-X  
EXCLUSIVE APPLICATOR FOR 2.5MM PITCH  
HDR HSG:P/N 752829-X
  - INSTRUCTION SHEET:IS-206J,207J,208J
- 5 LOOSE PIECE 172797-X SUPERSEDED  
BY CONTINUOUS 172781-X.

- 注記
- 適用ハウジング型番:172520(2.5MMピッチ用)  
:172890(2.0MMピッチ用)
  - 製品規格: 108-5163  
2/2.5MMピッチ・ヘッダーハウジング  
専用アプリケーター型番: 755764-X
  - 取付適用規格: 114-5062  
2.5MMピッチ・ヘッダーハウジング  
専用アプリケーター型番: 752829-X
  - 取扱説明書: IS-206J,207J,208J

1.2	1 -0.05 DIA 1.2-1.6	△5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-4
0.95	0.8±0.1 DIA 1.2-1.6	△5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-3
1.2	1 -0.05 DIA 1.2-1.6	△5	PRE-TINNED BRASS 0.2t	172781-2
0.95	0.8±0.1 DIA 1.2-1.6	△5	錫めっき済黄銅0.2t	172781-1
A REF	APPLICABLE PCB HOLE AND THK 適用基板穴径と板厚	LOOSE PIECE CONTACT P/N バラ状端子型番	MATERIAL 材料	PART NO. 型番

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SATO 120CT05		
DIMENSIONS: 単位: 純 mm		CHK N.YAMASAKI 120CT05		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD N.YAMASAKI 120CT05	NAME 名称	
10 ≤ ± 0.2 10 < 30 ± 0.25 30 < 100 ± 0.3 ANGLES ± 5°		PRODUCT SPEC 製品規格	LOW PROFILE MINI AMP-IN CONTACT	
MATERIAL 材料 SEE TABLE		APPLICATION SPEC 取付適用規格	SIZE A3	CAGE CODE 00779
FINISH 仕上		WEIGHT	DRAWING NO 番号 C-172781	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 尺度 1/1	SHEET 1 OF 1
			REV C2	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[172781-2](#)