
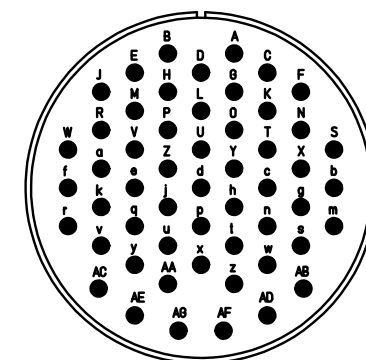
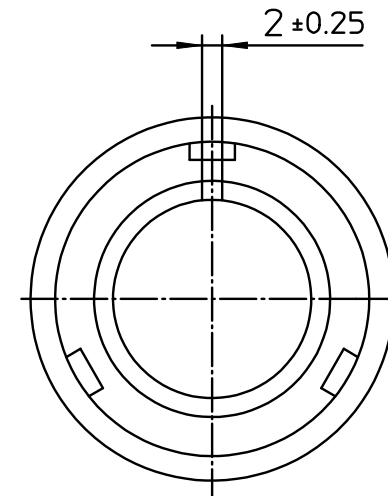


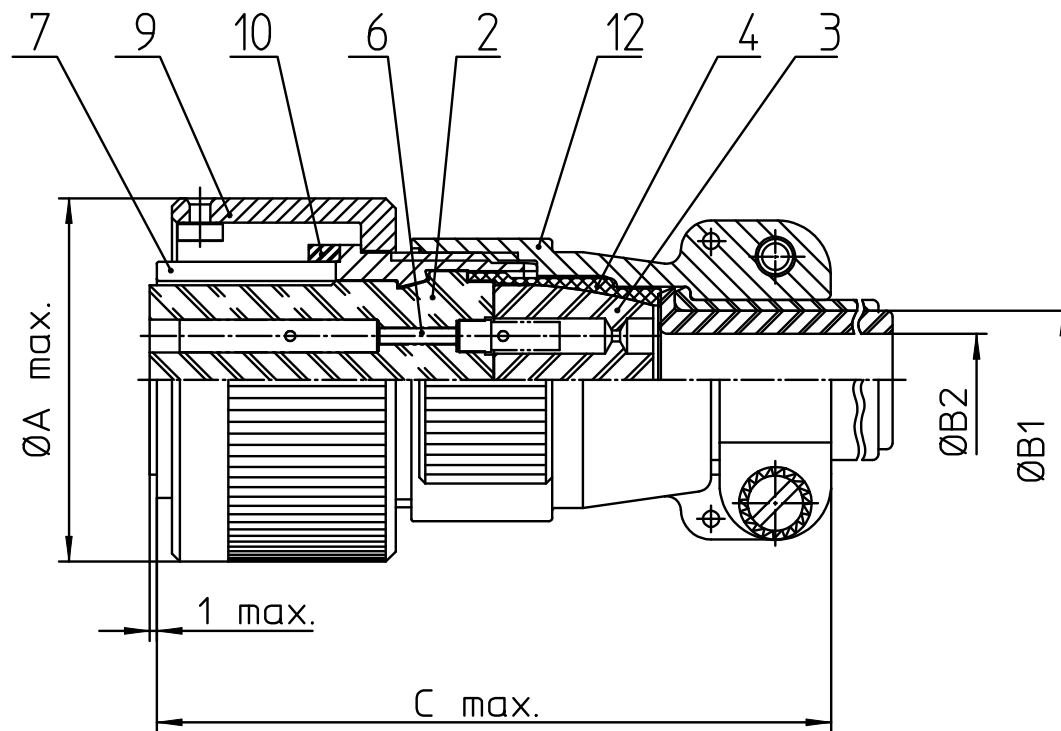

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 60.1              |
| B1  | 26.8              |
| B2  | 21.5              |
| C   | 76                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 12  | ENDGEHÄUSE / ENDBELL                    |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

|                                                                                                                                                                                                     |                                                                                                                                          |                             |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   |                                                                                                                                          | drawing for<br>CUSTOMER     |  |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> | description <b>CA3106E32A10S-B</b><br>Plug, straight<br>Endbell with clamp and bushing<br>Solder Cup / Socket / Layout: 32A10            |                             |  |
|                                                                                                                                                                                                     | © All rights reserved. Reproduction or issue to third in any form<br>whatever is only permitted with written authorization of ITT Cannon |                             |  |
|                                                                                                                                                                                                     | page<br>1/1                                                                                                                              | revision<br>1983 24. Nov 20 |  |
|                                                                                                                                                                                                     |                                                     |                             |  |