


METRIC
DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE		E13288 Listed
16-14HD AWG SOLID OR STRANDED		16-14HD AWG STRANDED
LR7189 Certified		MILITARY P/N AND CLASS
16-14HD AWG SOLID OR STRANDED		NOT APPLICABLE

△ STAMP AMP 16-14HD* APPROX AS SHOWN

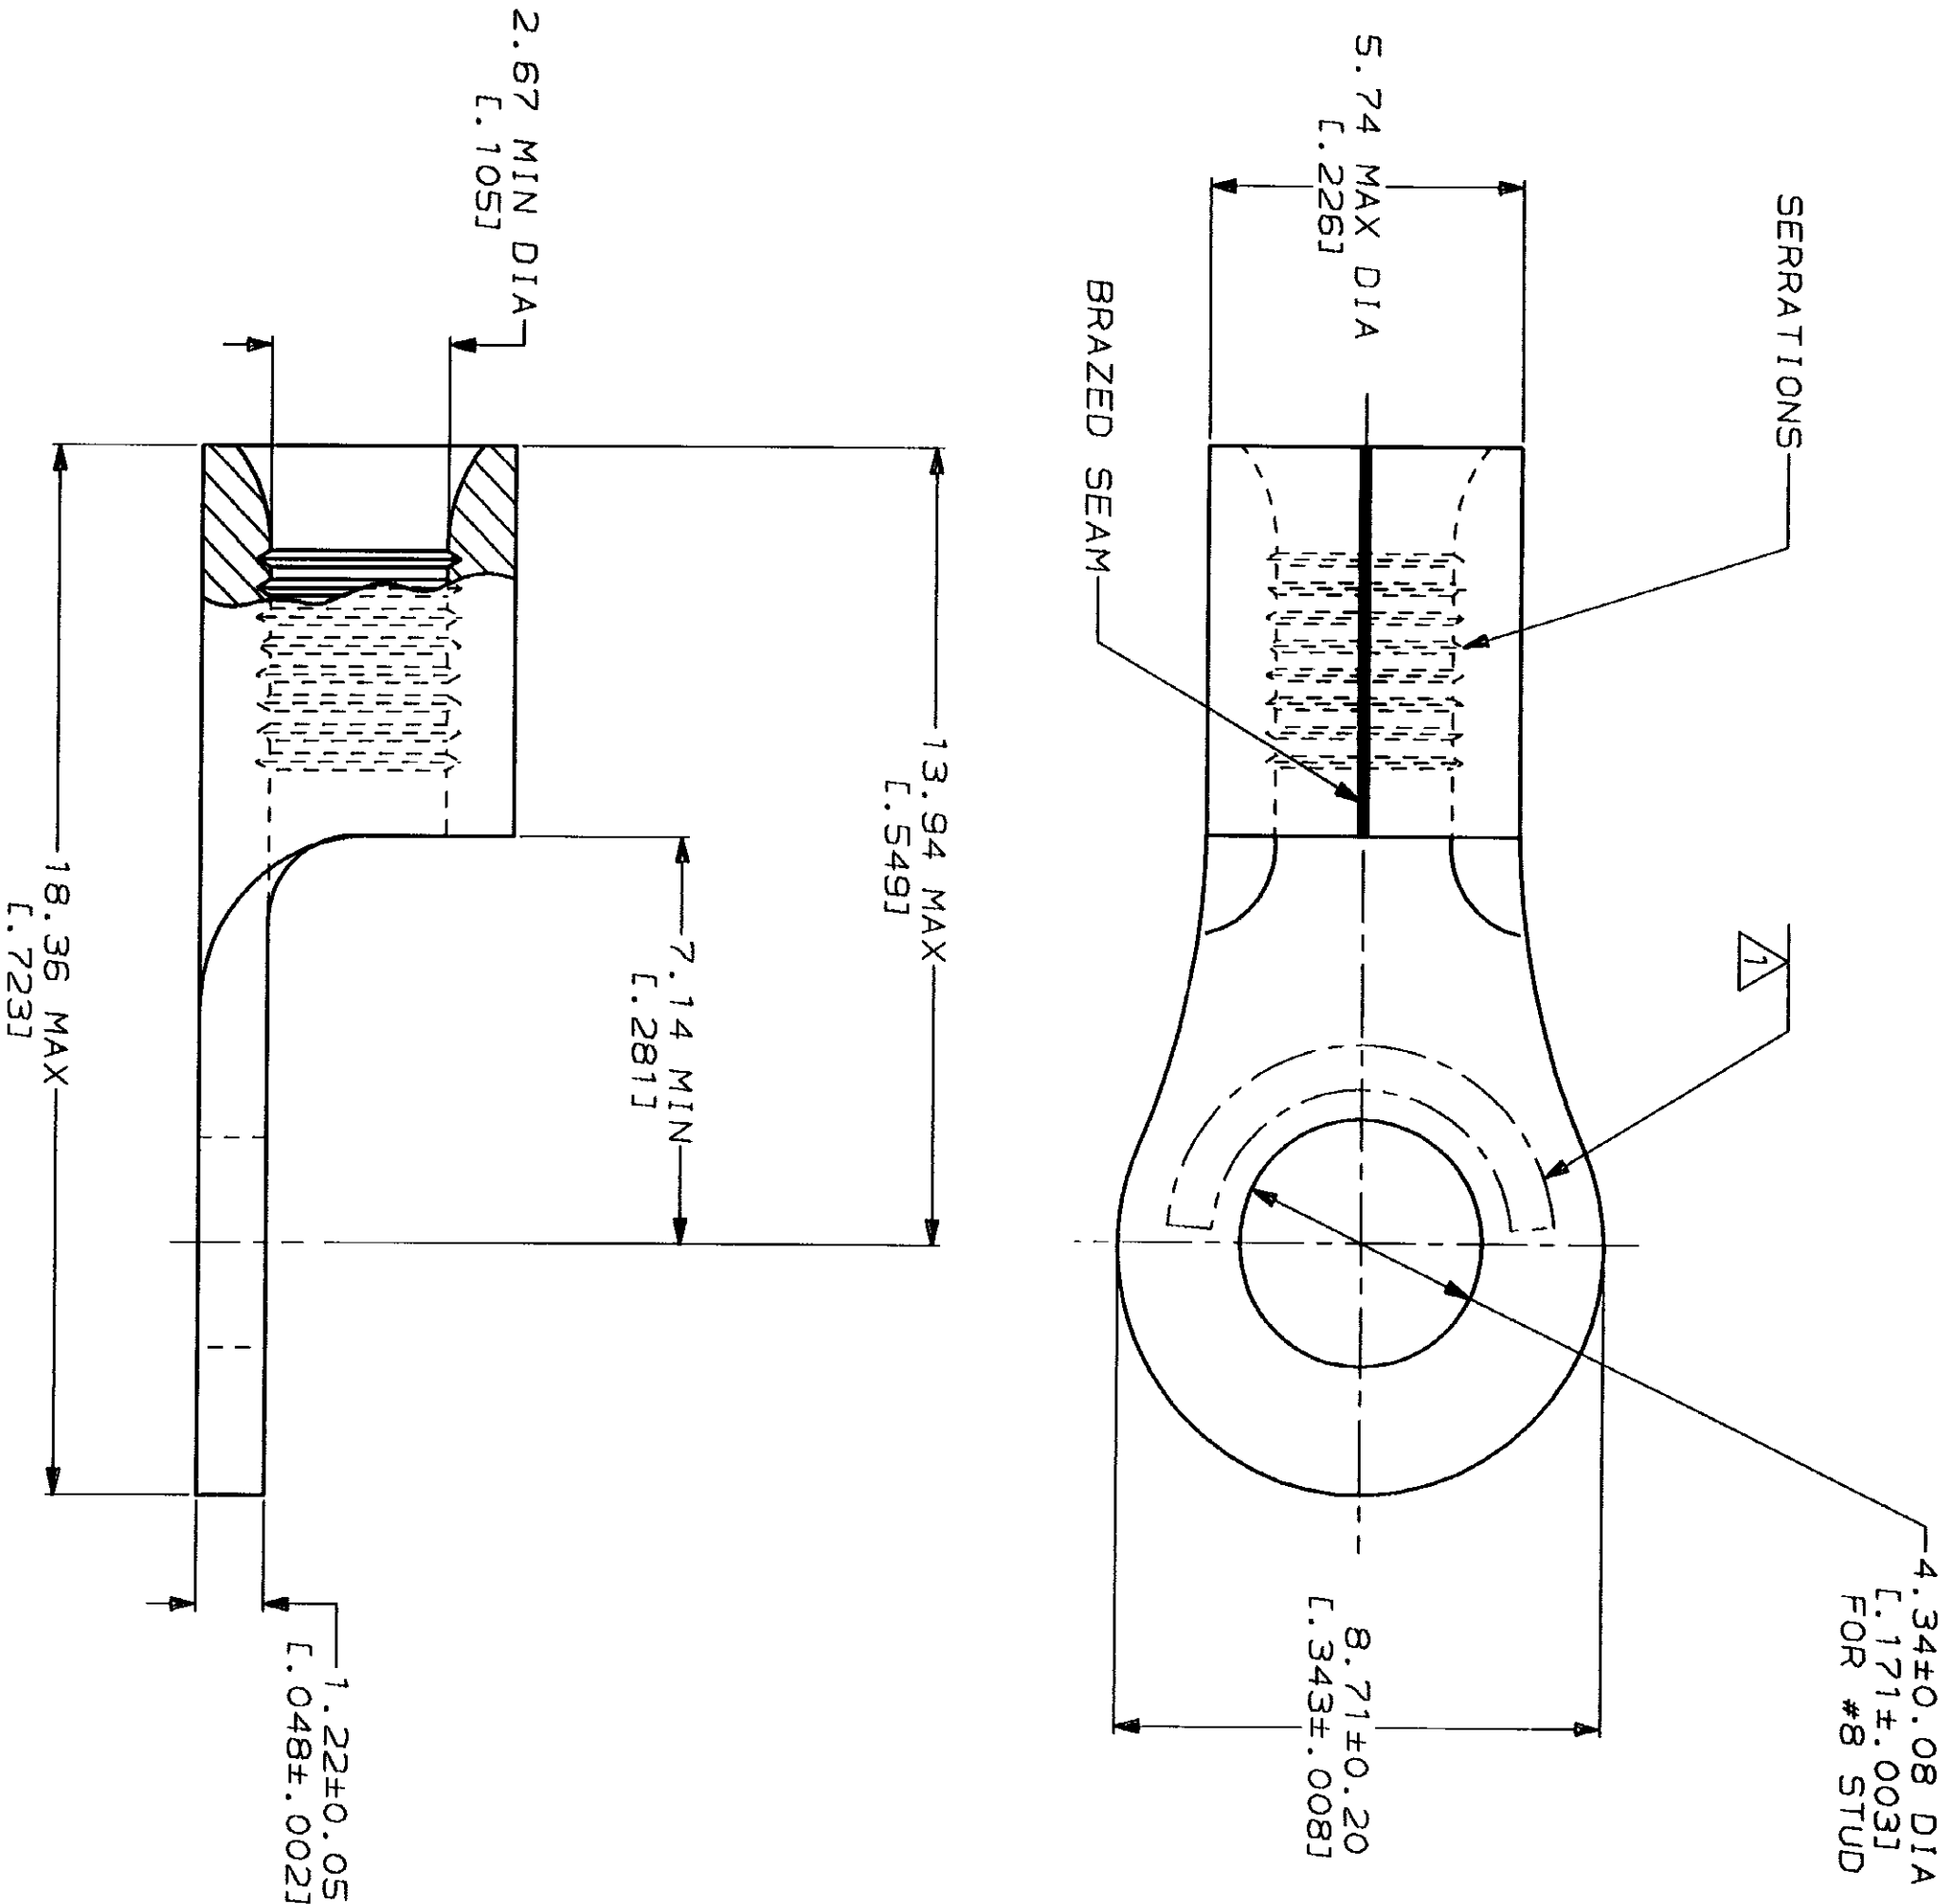

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
1.04-2.62mm² [2,050-5,180] CIR MILS
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLC DEC ±
3 PLC DEC ±
ANGLES
MATERIAL
COPPER PER
ASTM B-152
ANNEALED
FINISH
TIN PLATE
0.00254 [1.000100] MIN
THK PER MIL-T-10727

DR 3-17-93
GL KRUPER
CHK 3-17-93
DA PATTERSON
APPD 3-17-93
DE MILLER
APPD 3-17-93
JL MECKLEY
PRODUCT SPEC

AMP
AMP Incorporated
Harrisburg, PA 17105-3608

NAME
TERMINAL, RING TONGUE,
HEAVY DUTY, SOLISTRAND™

APPLICATION SPEC
SIZE
CAGE CODE
DRAWING NO
SCALE
8:1

35432
PART NO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[35432](#)