
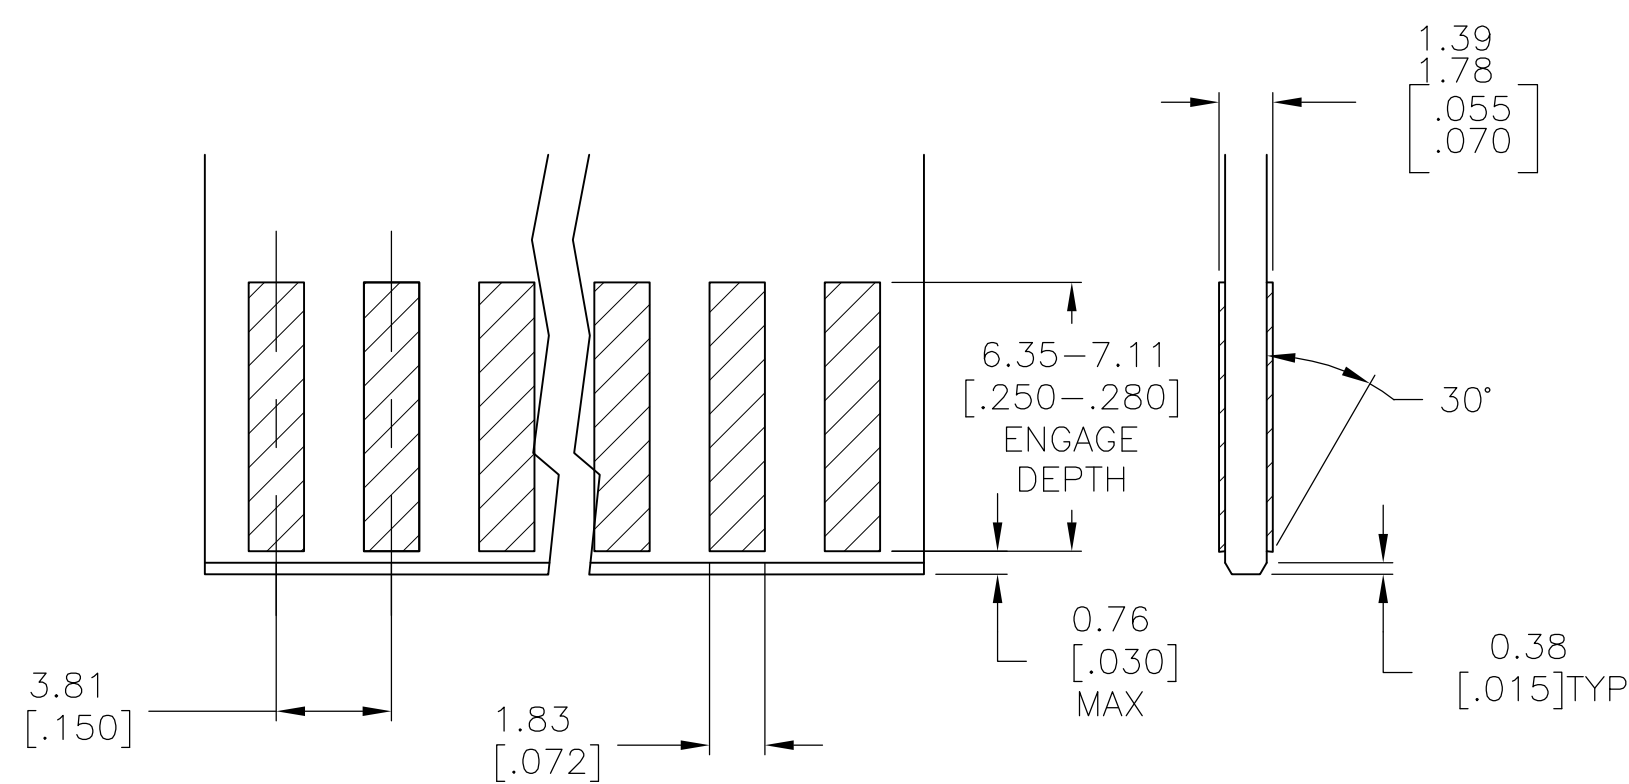
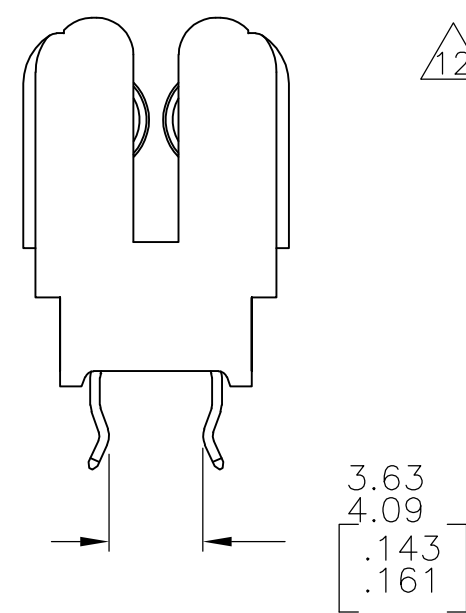
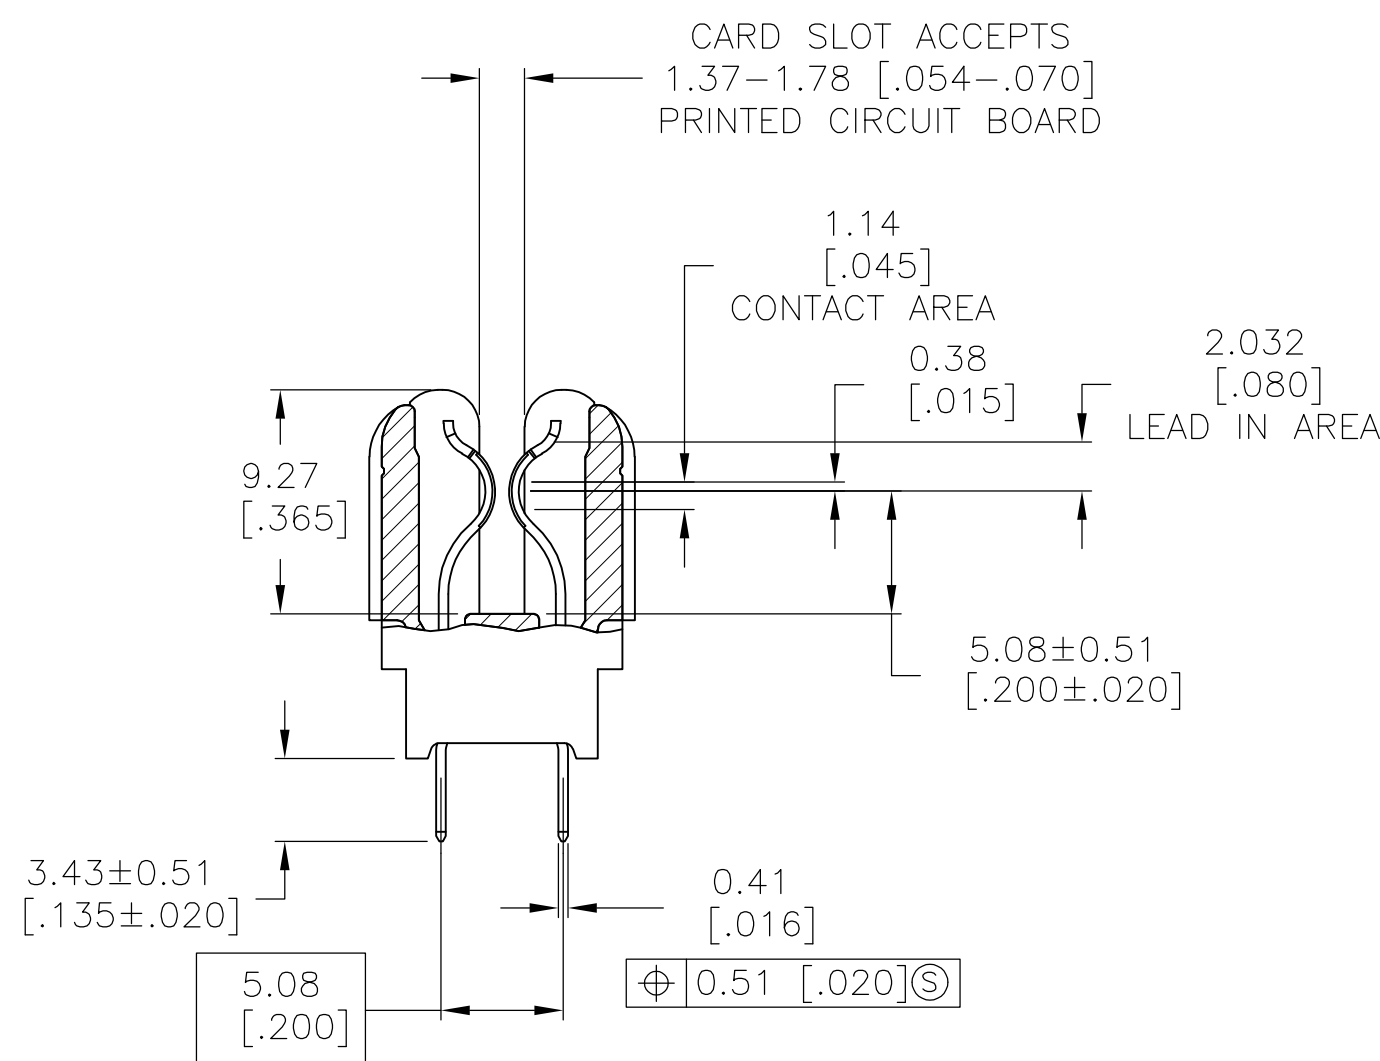



LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DMN	APVD
					P2	REVISED PER ECO-12-008643	08AUG12	KH	AS

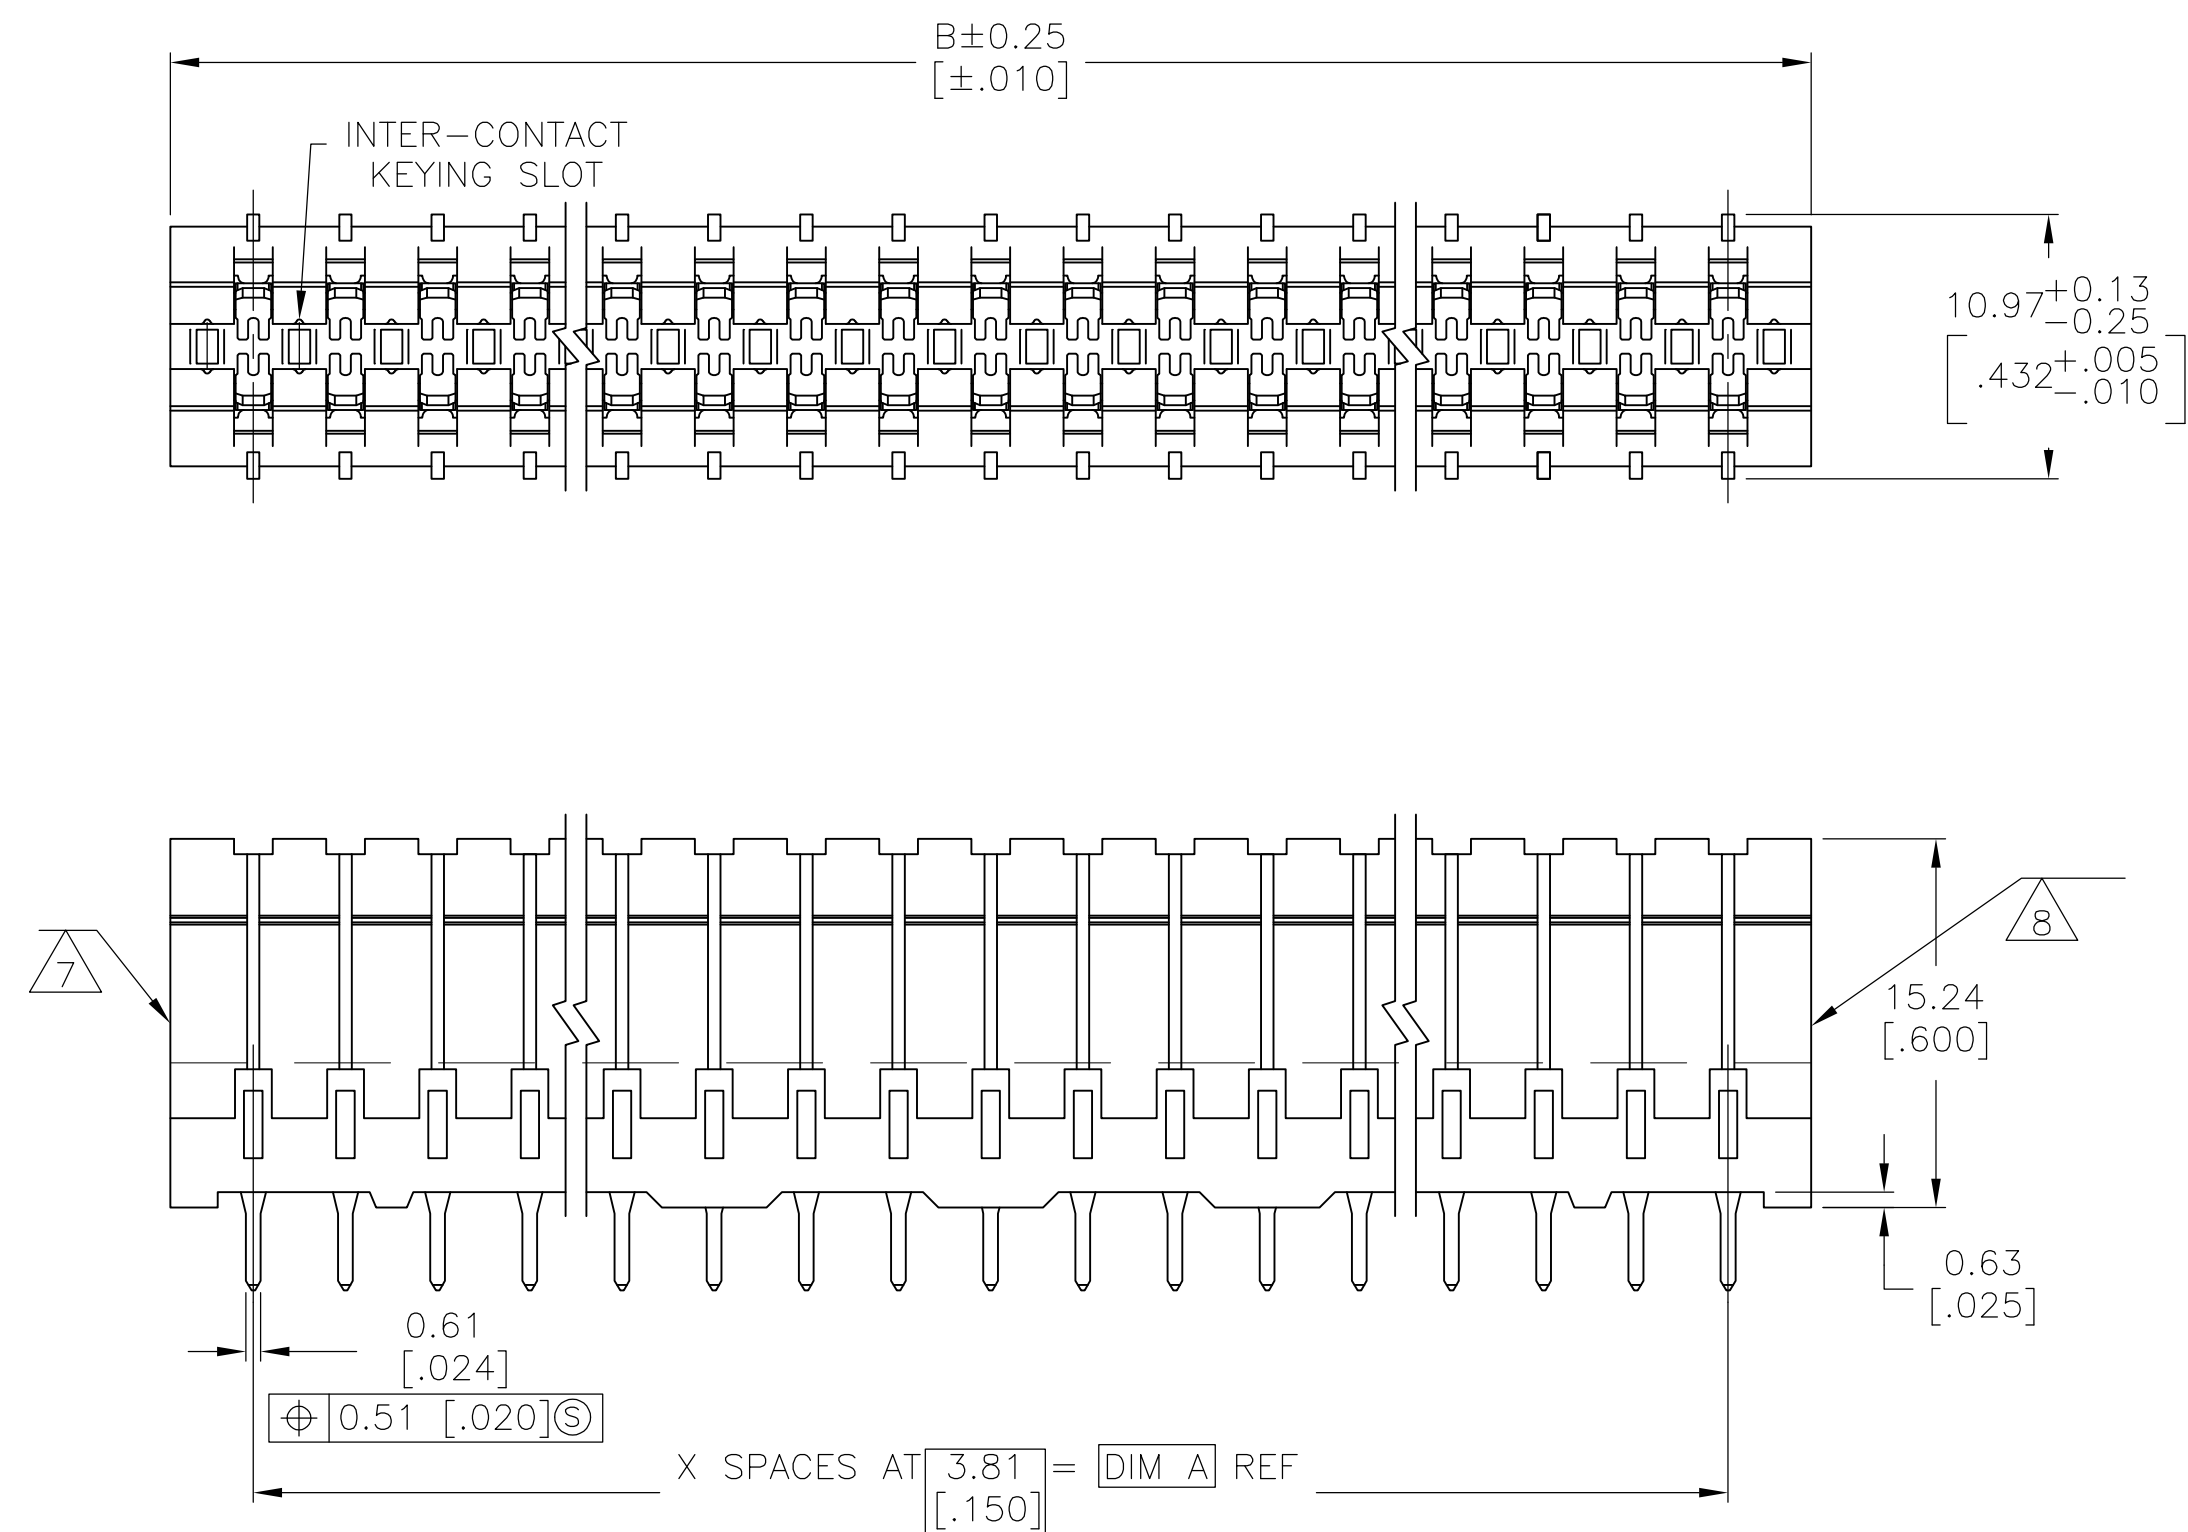

DAUGHTER CARD

- | | |
|---|---|
|  | HOUSING: GLASS FILLED POLYESTER; COLOR: BLACK. |
|  | CONTACT: PHOSPHOR BRONZE. |
|  | HARD NICKEL PLATE .0038 { .000150 } MIN. THICKNESS
AND 425 MIN. KNOOP HARDNESS IN LEAD-IN AREA, .0013 [.000050] MIN THICKNESS
ALL OVER. NOTE: PLATING HARDNESS CAN NOT BE MEASURED ON THE |
|  | TIN-LEAD PLATE: 0.00254 [.000100] MIN – SOLDER POSTS. |
|  | GOLD PLATE: 0.00076 [.000030] MIN – CONTACT AREA. |
|  | NICKEL PLATE PER MIL-G-45204.
GOLD PLATE PER QQ-N-290. |
|  | UL & CSA LOGOS MOLDED ON END. |
|  | THE WORD MEXICO MOLDED ON END. |
| 9 | RECOMMENDED PCB FINISHED HOLE DIA: 1.02 # 0.08 [.040 #.003]. |
| 10 | THE RETENTIVE FEATURE OF THIS CONNECTOR IS DESIGNED FOR
FULL SEATING IN .062 .008 THICK CIRCUIT BOARDS.
FOR APPLICATIONS IN BOARDS OF OTHER THICKNESSES CONTACT
AMP INCORPORATED. |
|  | MATTE TIN PLATE: 0.00254 [.000100] MIN – SOLDER POSTS. |
|  | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

12	OBSOLETE	7-10, 27-34, 53-56	121,16 4,770	114,30 4,500	30	31	11 -8-650728-1
		7-10, 25-32, 47-50	109,74 4,320	102,87 4,050	27	28	11 -7-650728-8
		7-10, 29-32	75,44 2,970	68,58 2,700	18	19	11 -6-650728-9
		7-10, 15-18	48,77 1,920	41,91 1,650	11	12	11 -6-650728-2
	OBSOLETE	7-10, 39-46, 75-78	163,06 6,216	156,21 6,150	41	42	4-650728-2
12	OBSOLETE	7-10, 27-34, 53-56	121,16 4,770	114,30 4,500	30	31	3 -650728-1
		7-10, 25-32, 47-50	109,74 4,320	102,87 4,050	27	28	2-650728-8
		7-10, 29-32	75,44 2,970	68,58 2,700	18	19	1-650728-9
		7-10, 27-30	2,163 2,163	64,77 2,550	17	18	1-650728-8
	OBSOLETE	7-10, 17-20	52,58 2,070	45,72 1,800	12	13	1-650728-3
		7-10, 15-18	48,77 1,920	41,91 1,650	11	12	1-650728-2
	BOARD RETENTION LOCATION	B	A	X	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DNI: 11JULY91 R. SHIREY/UTA CHK: 08BC032		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC ± — 2 PLC ± — 3 PLC ± 0.13 [0.005] 4 PLC ± — ANGLES ± —			
		APD: 08BC032 J. DIORAZIO PRODUCT SPEC 108-9039 APPLICATION SPEC —		NAME CONNECTOR ASSEMBLY, STANDARD EDGE II, 3.81 [150] q SELECT BOARD RETENTION	
MATERIAL FINISH CONTACT:		WEIGHT —		SIZE A1	
				CAGE CODE 00779	
DRAWING NO C-650728		RESTRICTED TO —		SCALE 4:1	
SHEET 1 OF 1		REV P		CUSTOMER DRAWING	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-650728-2](#)