
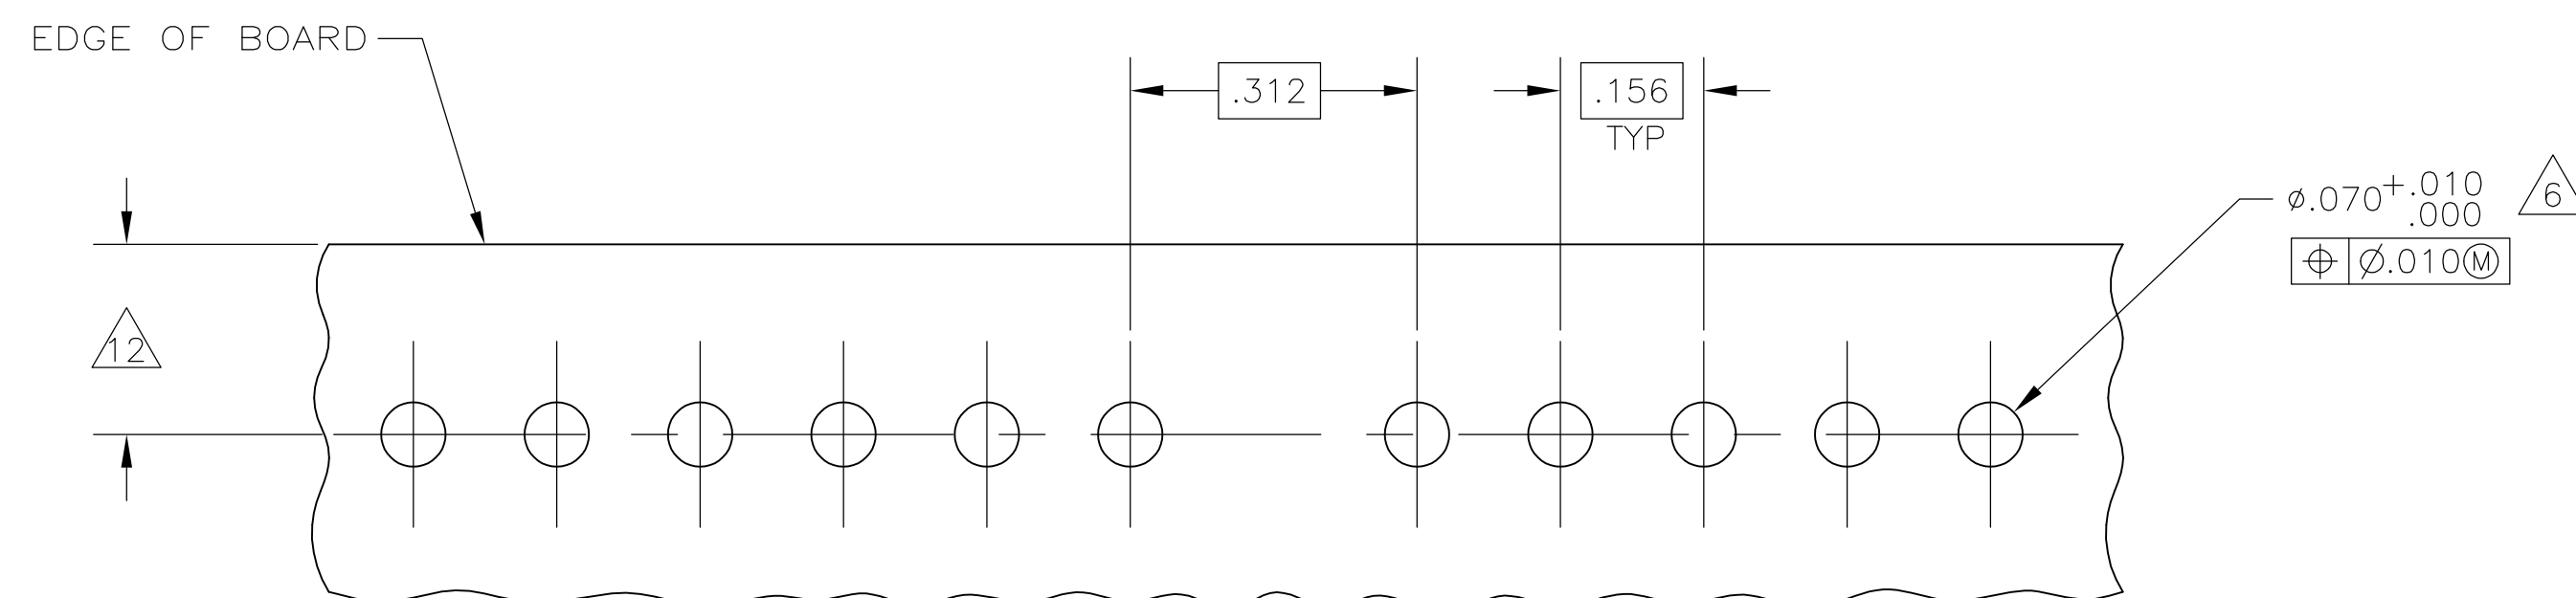
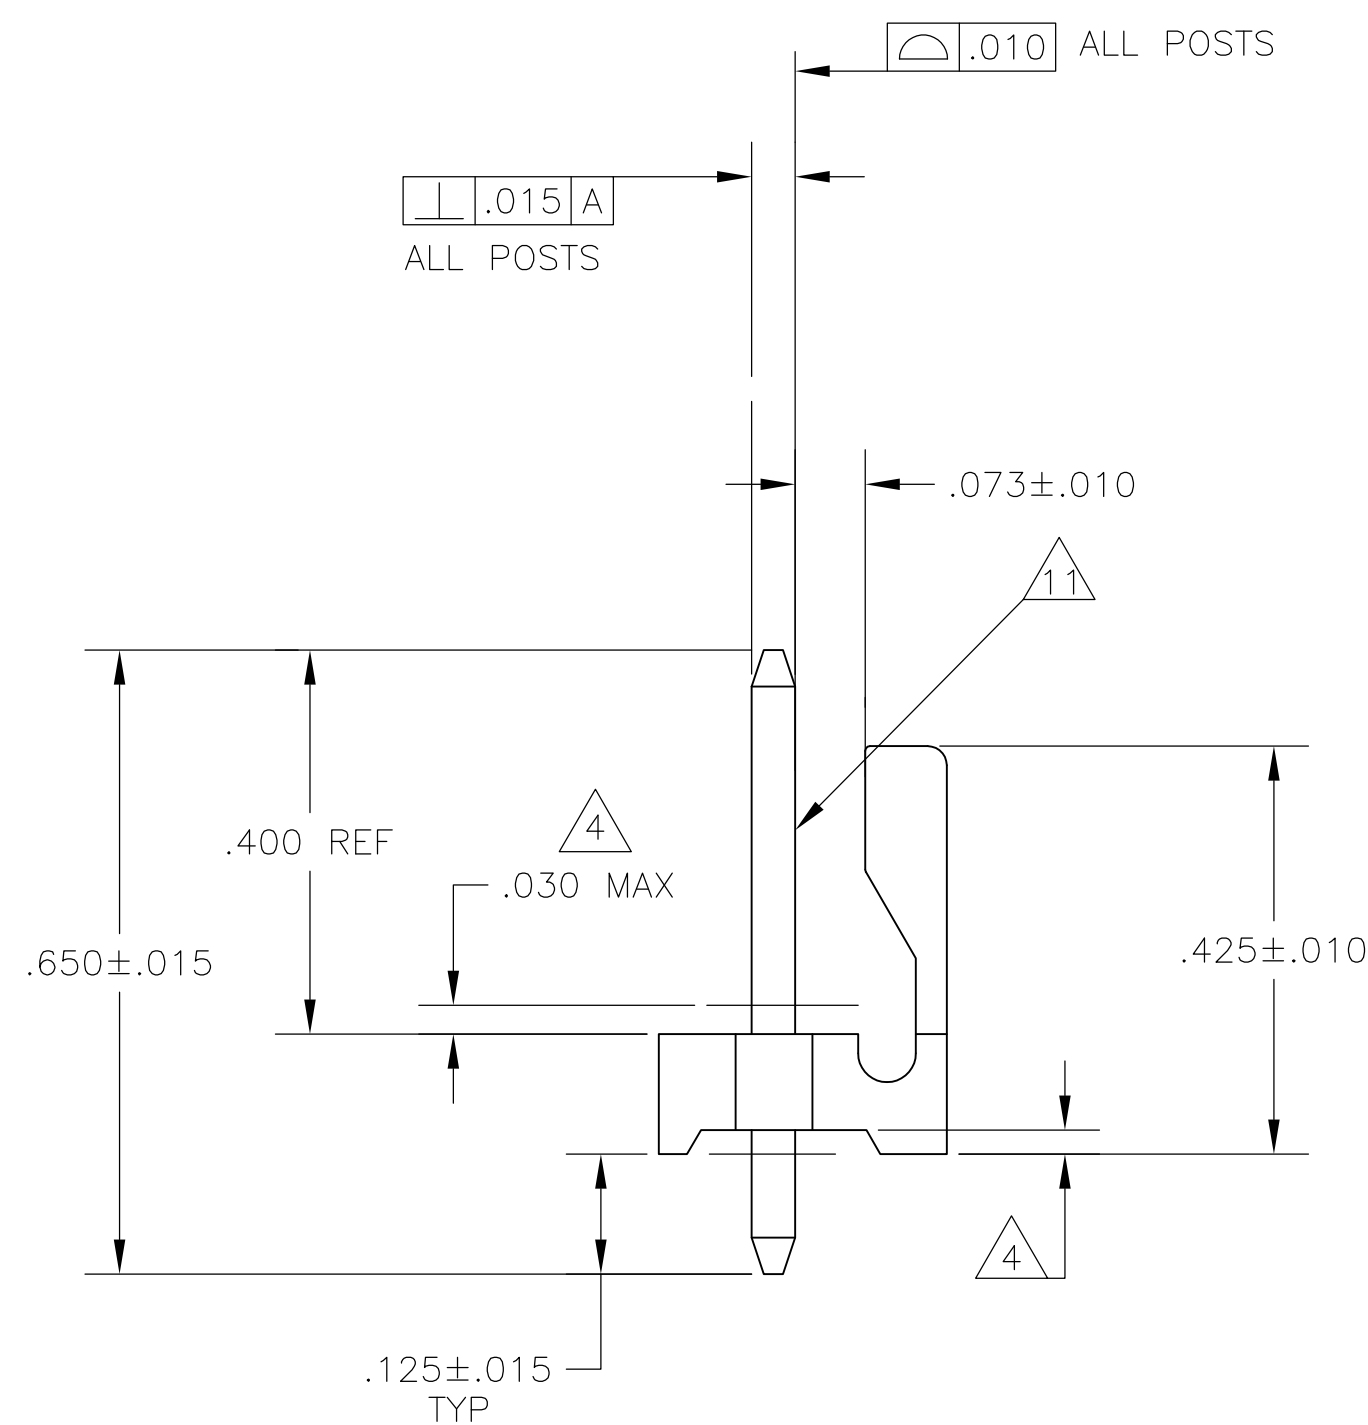
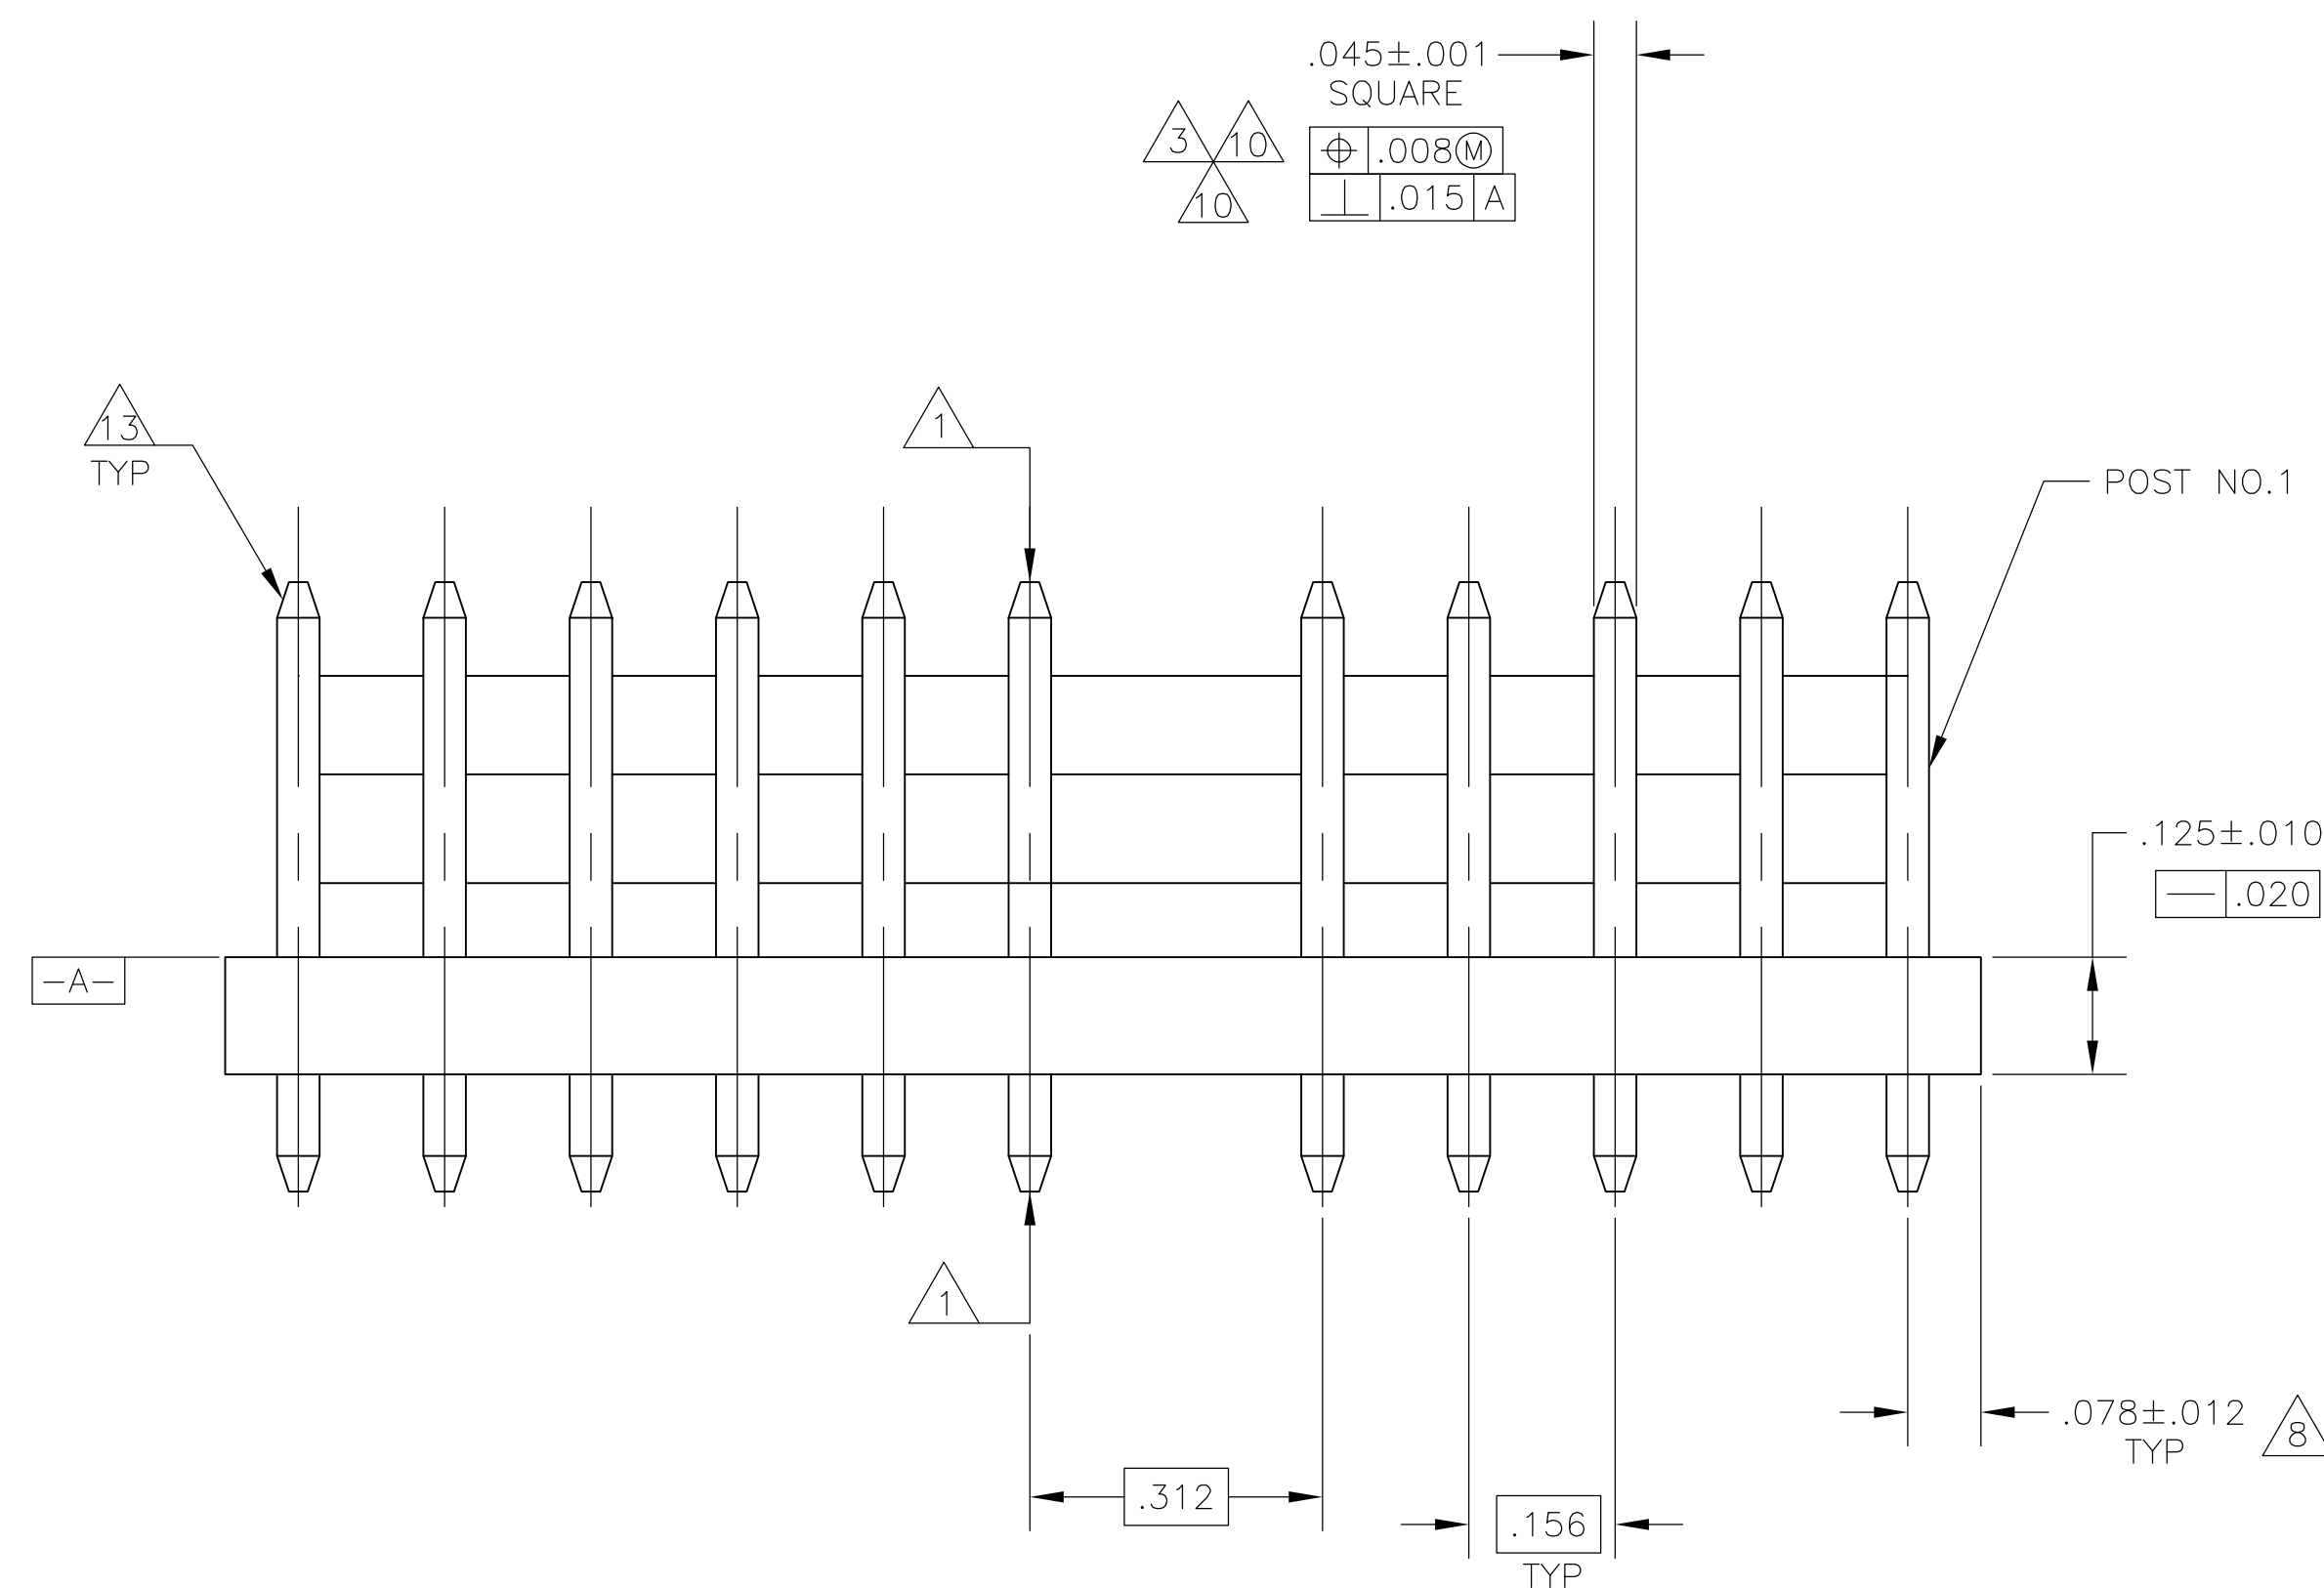


LOC	DIST	REVISIONS					
CM	54	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AB	REVISED PER ECO-12-016930	050CT12	KH	SM

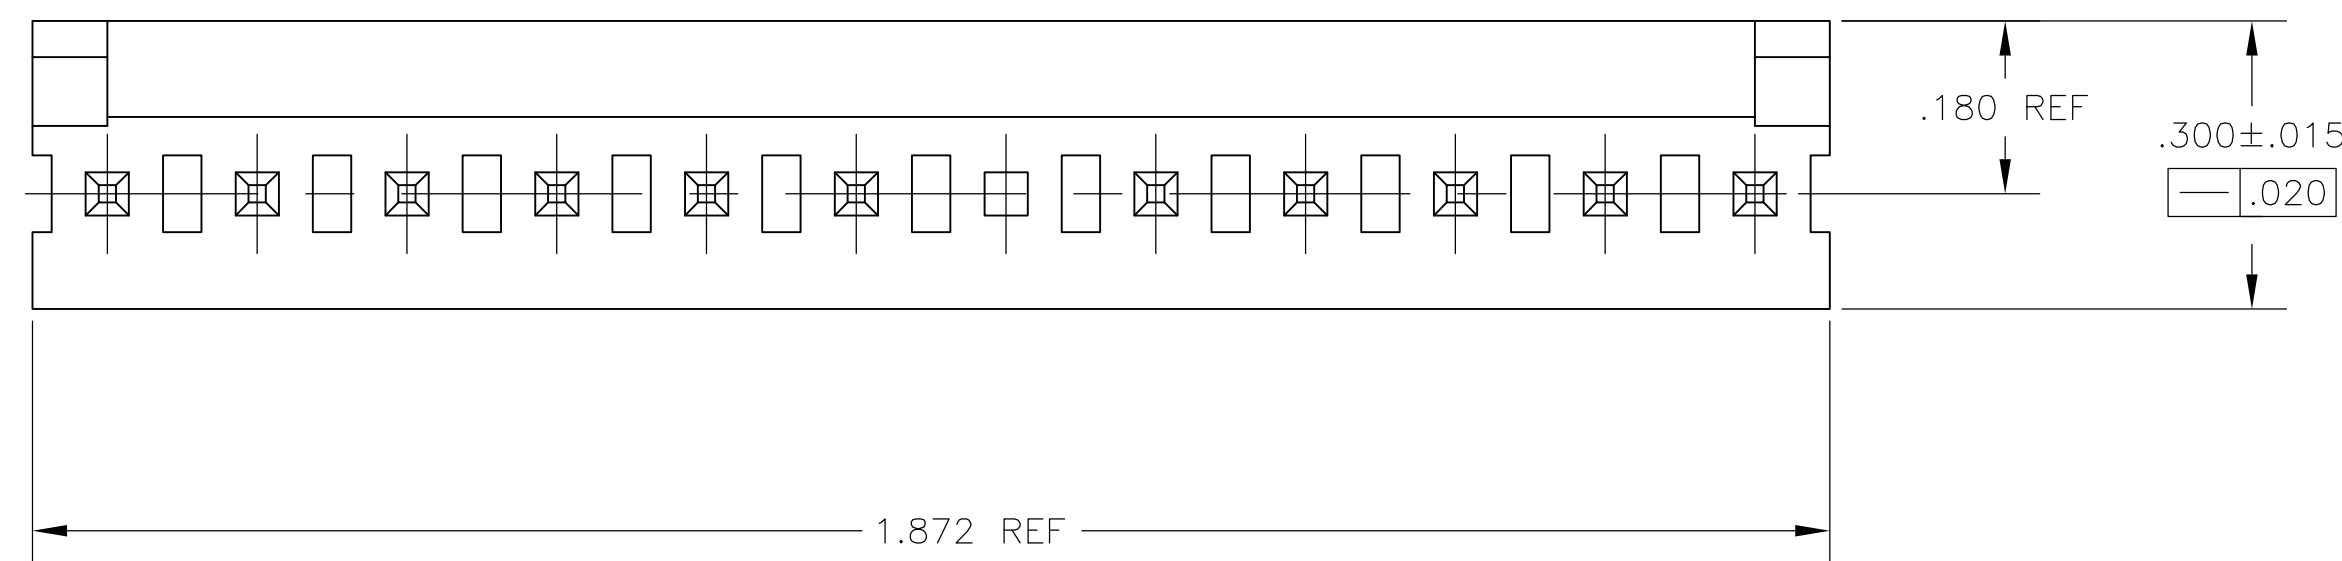


RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD

.065	1.65	1.872	47.55
.063	1.60	.700	17.78
.060	1.52	.450	11.43
.045	1.14	.425	10.80
.030	0.76	.312	7.92
.019	0.48	.300	7.62
.015	0.38	.180	4.57
.012	0.30	.175	4.45
.010	0.25	.156	3.96
.008	0.20	.125	3.18
.005	0.13	.078	1.98
.003	0.08	.073	1.85
.001	0.03	.070	1.78
IN	MM	IN	MM

CONVERSION TABLE

	11	1-641876-7
	5,9	1-641876-6
PRELIMINARY	2,4,6,9,11	1-641876-5
PRELIMINARY	5,7,9	1-641876-4
	2,4,6,8,11	1-641876-3
	1	1-641876-2
	4,7,8	1-641876-1
	7	1-641876-0
	6	641876-9
	3	641876-6
	4	641876-3
	POST NUMBER OMITTED	PART NUMBER

641876-9 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 255EP92 N. GANNON CHK R. SWING 255EP92		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .— 1 PLC ± .— 2 PLC ± .— 3 PLC ± .005 4 PLC ± .— ANGLES ± .—		NAME MTA-156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT, .045 SQUARE POST, TIN PLATED, 12 POSITION, OMITTED POST	
		APVD R. SOPER 070CT92 PRODUCT SPEC — APPLICATION SPEC —		SIZE CAGE CODE DRAWING NO A1 00779 C-641876	
MATERIAL 		FINISH 		RESTRICTED TO —	
		WEIGHT —		SCALE 5:1 SHEET 1 OF 1 REV AB	
		CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-641876-7](#)