
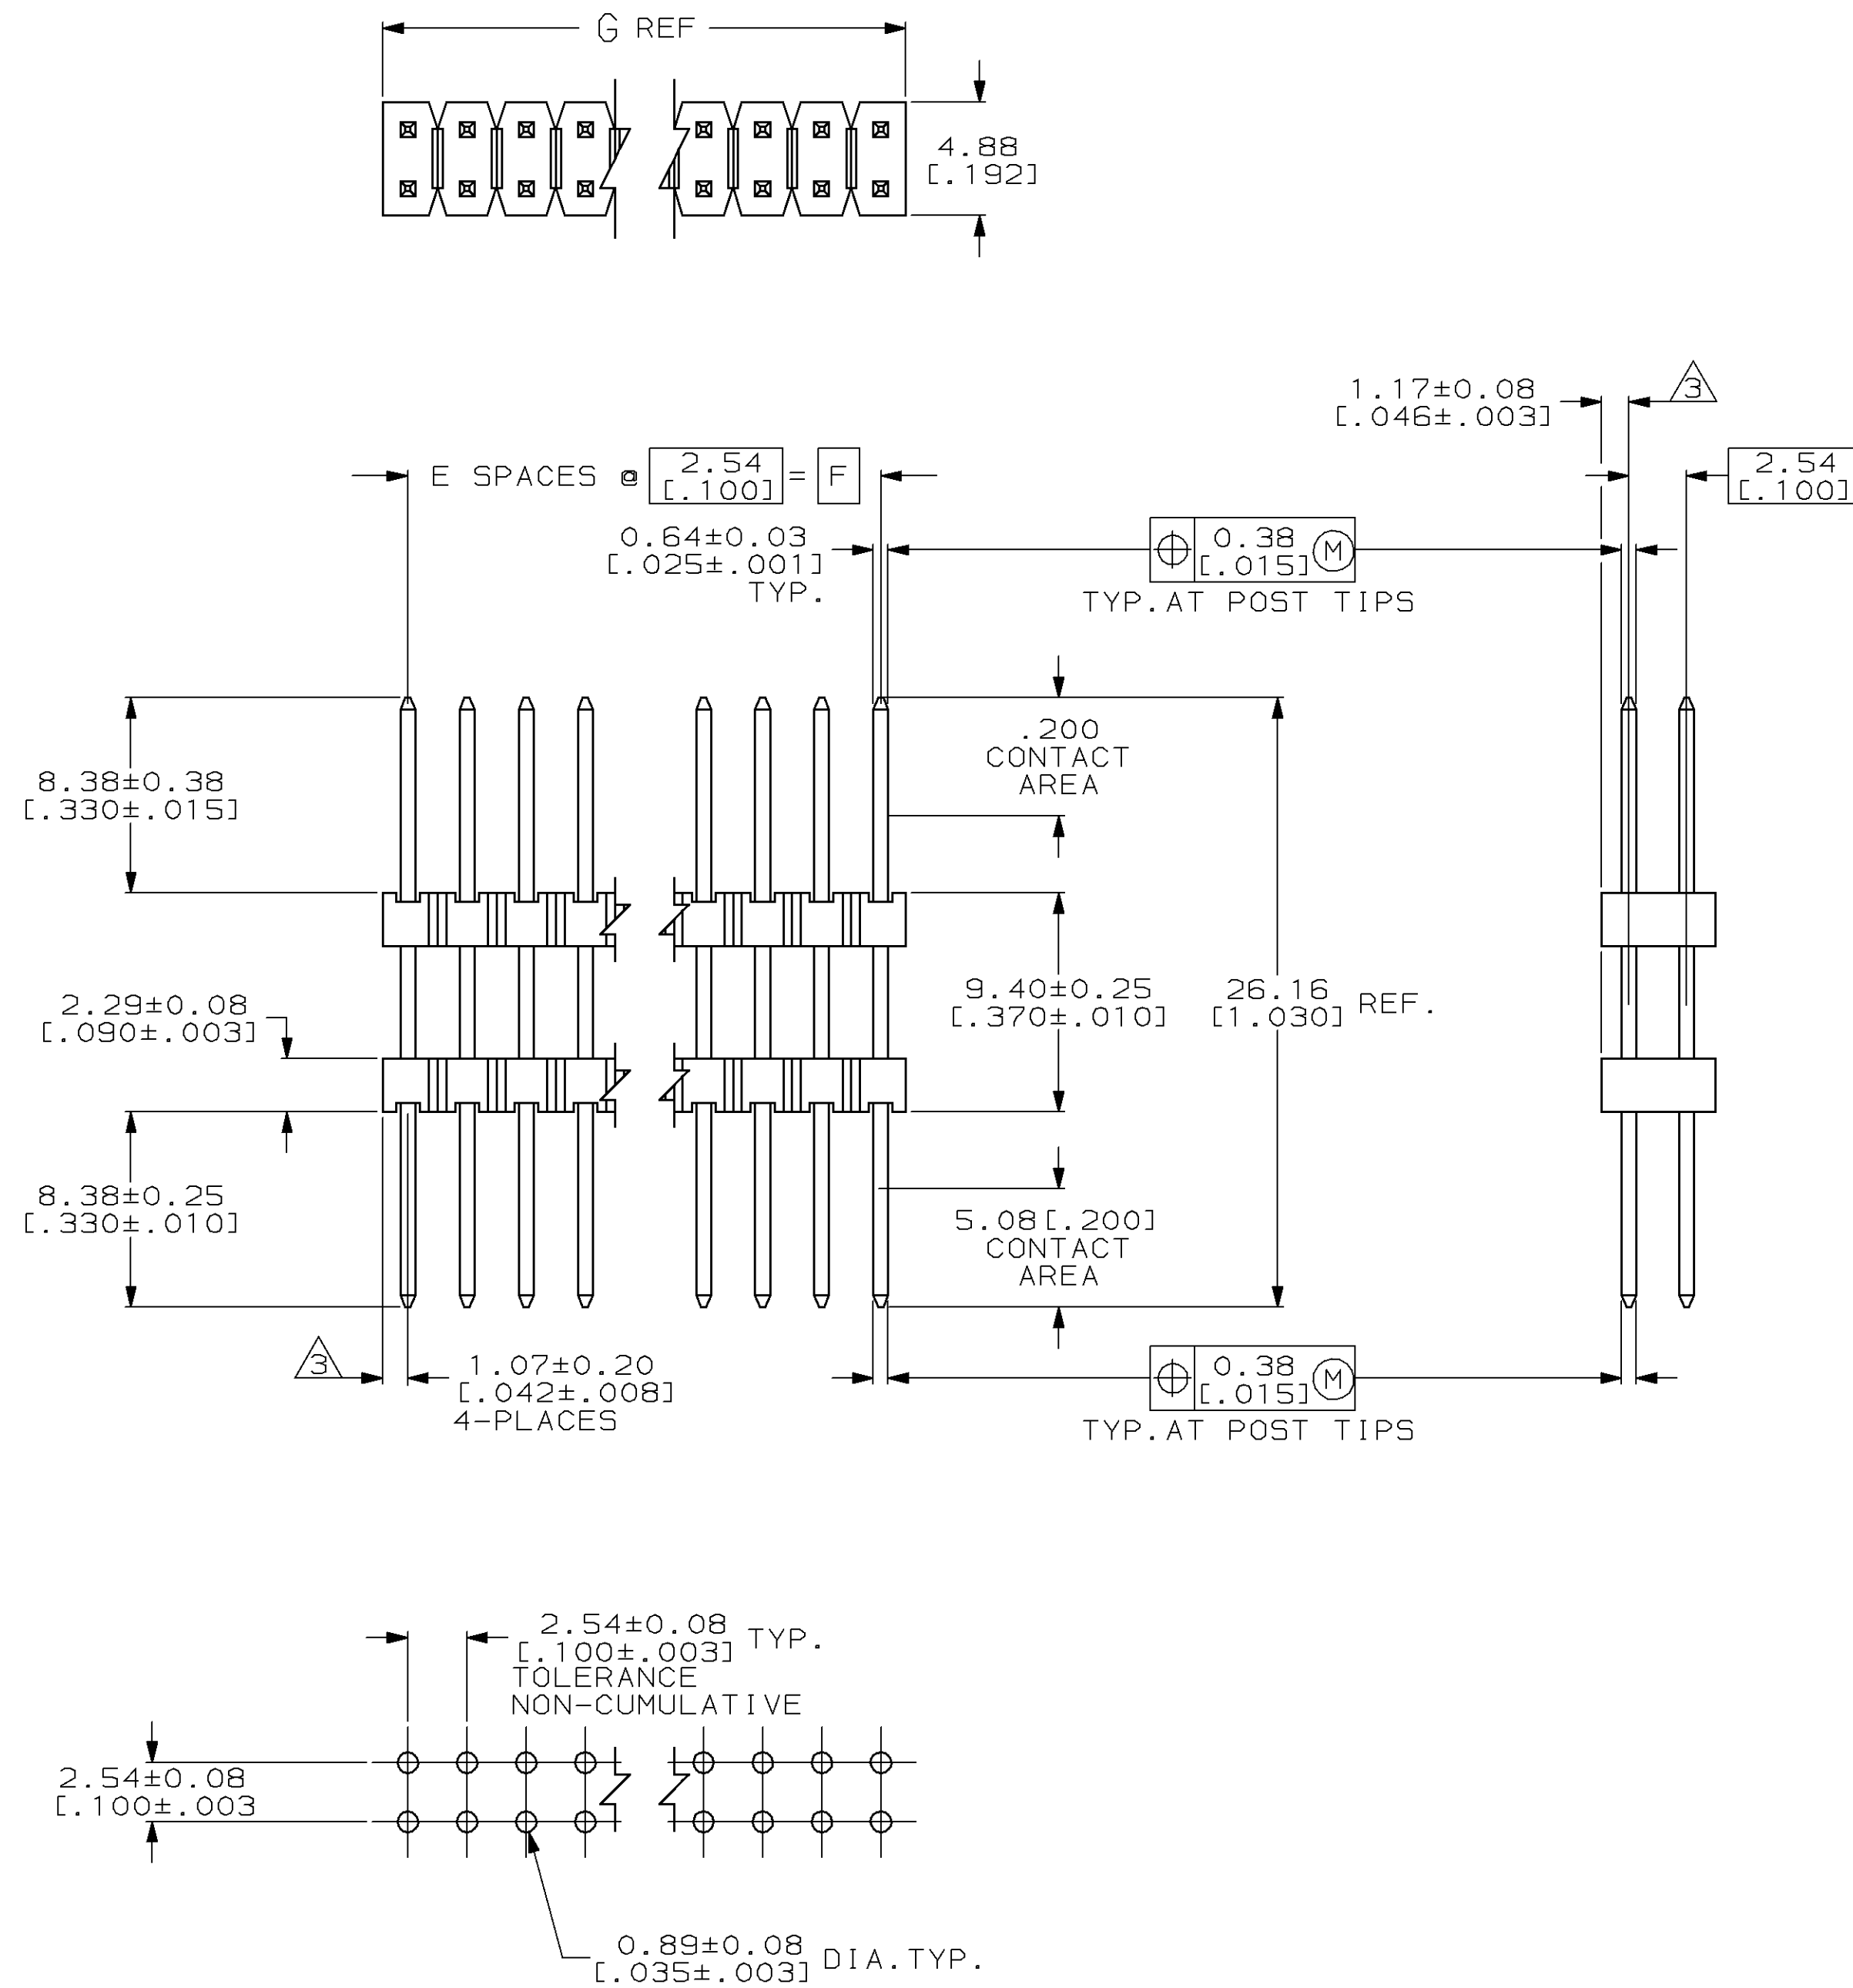


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	OWN	APVD
			0	RELEASED	12-NOV-96	EB	GD

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.



101.19 [3.984]	99.06 [3.900]	39	80	4-146498-0
98.65 [3.884]	96.52 [3.800]	38	78	3-146498-9
96.11 [3.784]	93.98 [3.700]	37	76	3-146498-8
93.57 [3.684]	91.44 [3.600]	36	74	3-146498-7
91.03 [3.584]	88.90 [3.500]	35	72	3-146498-6
88.49 [3.484]	86.36 [3.400]	34	70	3-146498-5
85.95 [3.384]	83.82 [3.300]	33	68	3-146498-4
83.41 [3.284]	81.28 [3.200]	32	66	3-146498-3
80.87 [3.184]	78.74 [3.100]	31	64	3-146498-2
78.33 [3.084]	76.20 [3.000]	30	62	3-146498-1
75.79 [2.984]	73.66 [2.900]	29	60	3-146498-0
73.25 [2.884]	71.12 [2.800]	28	58	2-146498-9
70.71 [2.784]	68.58 [2.700]	27	56	2-146498-8
68.17 [2.684]	66.04 [2.600]	26	54	2-146498-7
65.63 [2.584]	63.50 [2.500]	25	52	2-146498-6
63.09 [2.484]	60.96 [2.400]	24	50	2-146498-5
60.55 [2.384]	58.42 [2.300]	23	48	2-146498-4
58.01 [2.284]	55.88 [2.200]	22	46	2-146498-3
55.47 [2.184]	53.34 [2.100]	21	44	2-146498-2
52.93 [2.084]	50.80 [2.000]	20	42	2-146498-1
50.39 [1.984]	48.26 [1.900]	19	40	2-146498-0
47.85 [1.884]	45.72 [1.800]	18	38	1-146498-9
45.31 [1.784]	43.18 [1.700]	17	36	1-146498-8
42.77 [1.684]	40.64 [1.600]	16	34	1-146498-7
40.23 [1.584]	38.10 [1.500]	15	32	1-146498-6
37.69 [1.484]	35.56 [1.400]	14	30	1-146498-5
35.15 [1.384]	33.02 [1.300]	13	28	1-146498-4
32.61 [1.284]	30.48 [1.200]	12	26	1-146498-3
30.07 [1.184]	27.94 [1.100]	11	24	1-146498-2
27.53 [1.084]	25.40 [1.000]	10	22	1-146498-1
24.99 [.984]	22.86 [.900]	9	20	1-146498-0
22.45 [.884]	20.32 [.800]	8	18	146498-9
19.91 [.784]	17.78 [.700]	7	16	146498-8
17.37 [.684]	15.24 [.600]	6	14	146498-7
14.83 [.584]	12.70 [.500]	5	12	146498-6
12.29 [.484]	10.16 [.400]	4	10	146498-5
9.75 [.384]	7.62 [.300]	3	8	146498-4
7.21 [.284]	5.08 [.200]	2	6	146498-3
4.67 [.184]	2.54 [.100]	1	4	146498-2
2.13 [.084]	-	-	2	146498-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE PURPOSES OF ISO 9001:2015. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWG E. BRANDBERG	12-NOV-96		
		G. DUBNICKI		AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCH)		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED	
		0 PLC ±— 1 PLC ±.01 2 PLC ±.015 F. (.02) 3 PLC ±.0127 (.005) 4 PLC ±.0127 (.005) ANGLES — ±—	PRODUCT SPEC — APPLICATION SPEC	SIZE	CAGE CODE
MATERIAL	FINISH	WEIGHT	A1	00779	DRAWING NO C-146498
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV 0		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146498-3](#)