

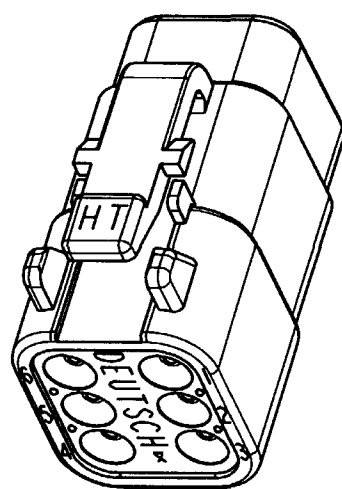
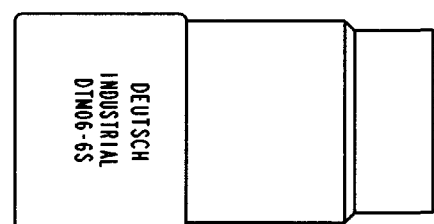

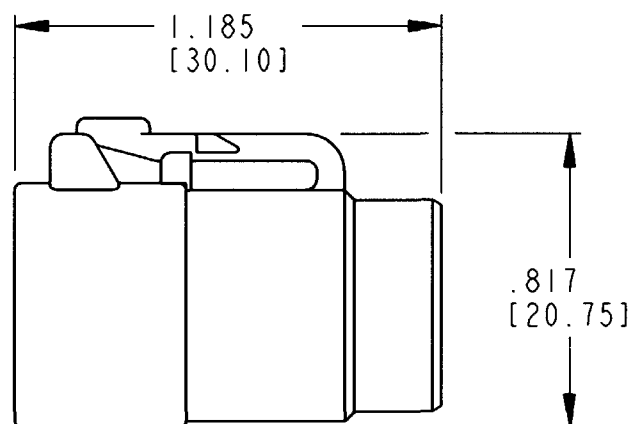


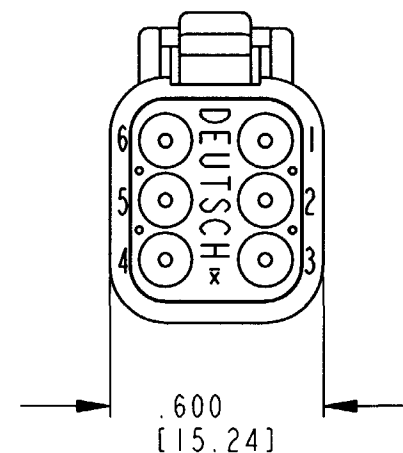

HIGH TEMPERATURE IDENTIFIER

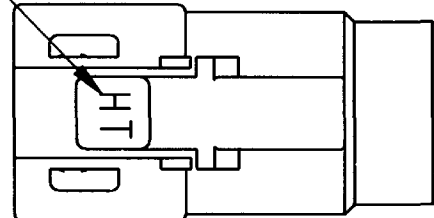

PLUG HOUSING

7. PART MODIFICATION: PLUG IS BLACK AND RATED AT 150°C.
6. MATERIAL - HOUSING: PLASTIC (BLACK) ; GROMMET: RUBBER.
5. CONNECTOR DESIGNED TO BE USED WITH DTM04-6P-**** RECEPTACLE.
(****) = ALL HIGH TEMPERATURE MODIFICATIONS
CONSULT FACTORY FOR MODIFICATIONS
4. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION
CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
3. SECONDARY WEDGE LOCK SOLD SEPARATELY: WM-6S.
2. DIMENSION TOLERANCE: $\pm .025$ [.64].

1. DIMENSIONS ARE IN INCHES [mm].
NOTES: UNLESS OTHERWISE SPECIFIED

REV
NC DTM06-6S-EE04

REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P19786	4-21-08	RDR

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] REF ONLY
20	.053 [1.35]	.120 [3.05]	16-20 AWG [1.0-0.5]

SIGNATURE & DATE	
DR	P. CARNAHAN 03/04/08
CHK	R. M. 4/15/08
PE	Paula Connell 4/8/08
APPD	D. Meyer 4/8/08
SCALE	NONE

PLUG
6 CONTACTS, SIZE 20
COLOR: BLACK
-EE04 MOD
DTM SERIES

ENVELOPE

EP 172	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
DEUTSCH INDUSTRIAL	
B	DTM06-6S-EE04
DWG SIZE	CODE 11139
SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DTM06-6S-EE04](#)