

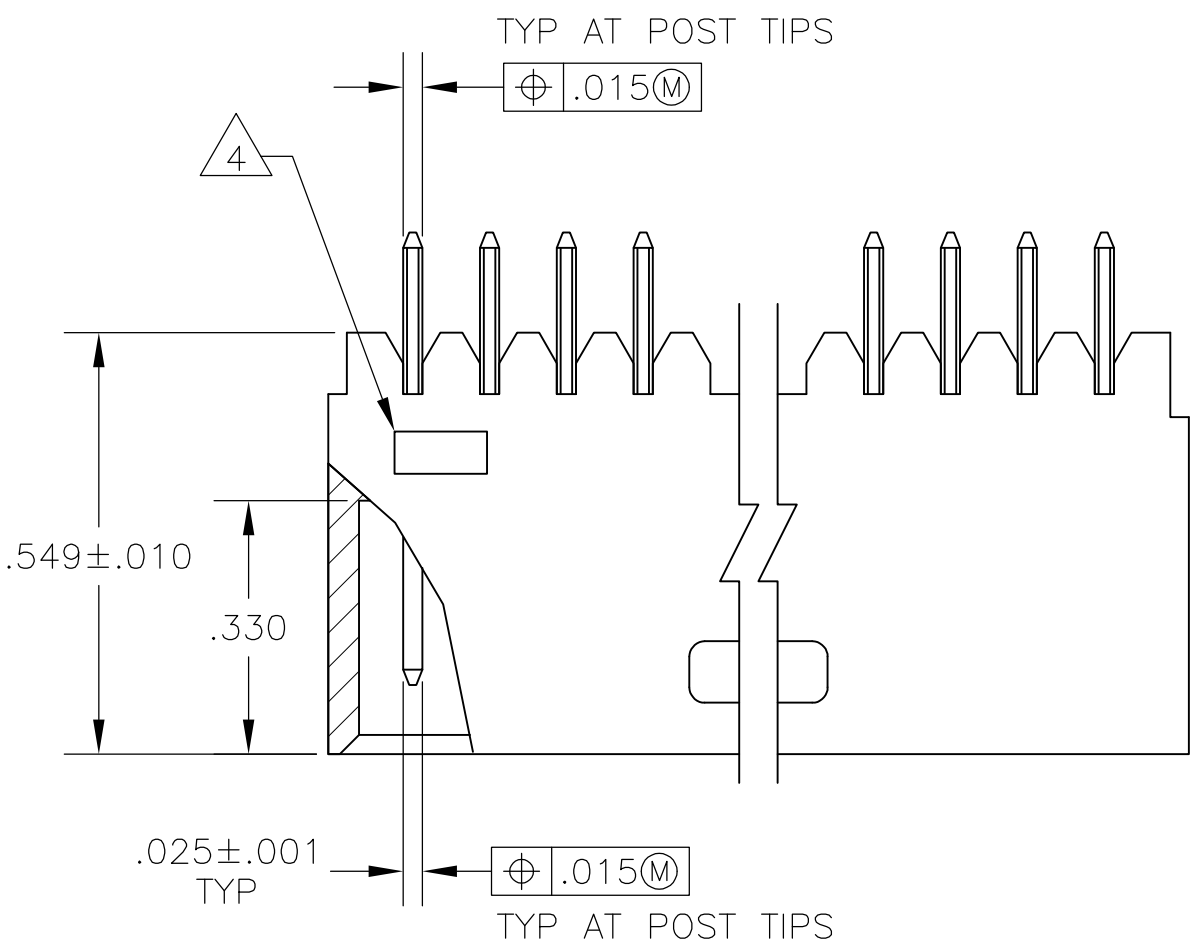


D

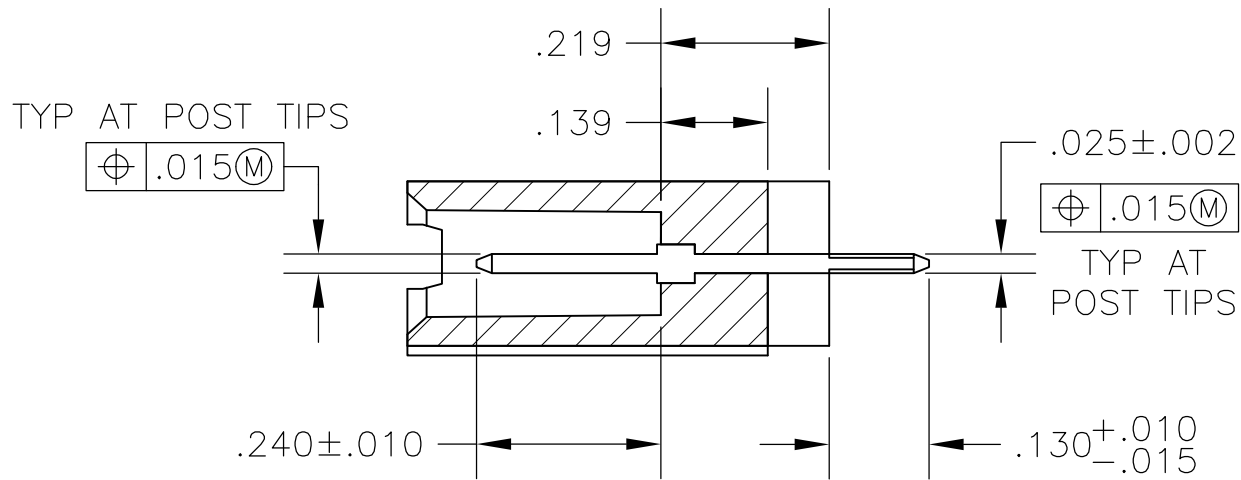



- 1 STANDOFFS:
UP TO 9 POS-(2 REQD) ON THE OUTSIDE ENDS OF THE HOUSING.
10 TO 19 POS-(3 REQD) TWO ON THE OUTSIDE ENDS AND ONE CENTERED ON THE HOUSING.
- 19 POS AND ABOVE-(4 REQD) TWO ON THE OUTSIDE ENDS AND TWO SPACED EVENLY WITHIN THE REMAINING LENGTH OF THE HOUSING.
- 2 FOR 3 POS. ONLY, ONE SLOT (.215 WIDE).
- 3 INDICATED PARTS ARE PACKAGED IN "GANG-OF-TUBES".
- 4 RECESSED DATE CODE
- 5 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 6 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 7 PRELIMINARY PART
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

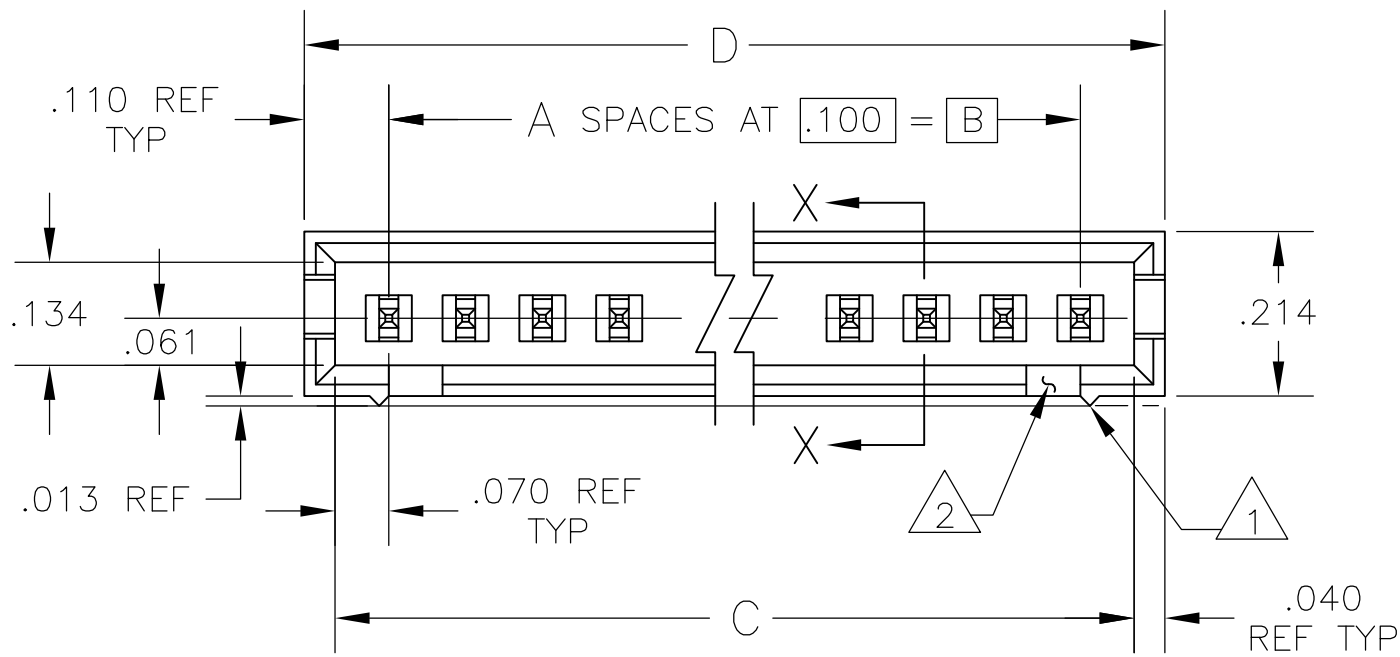

SECTION X-X

B

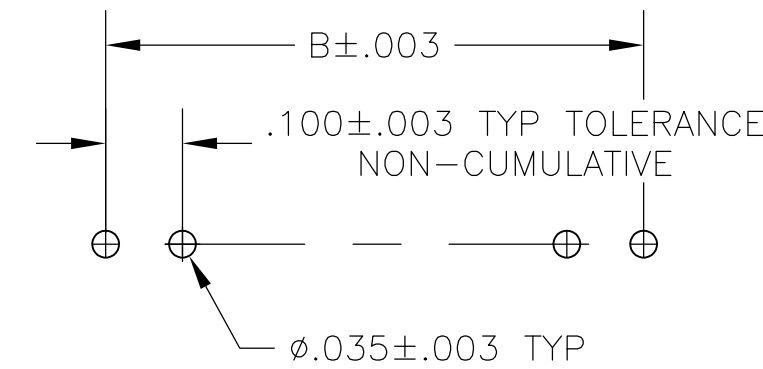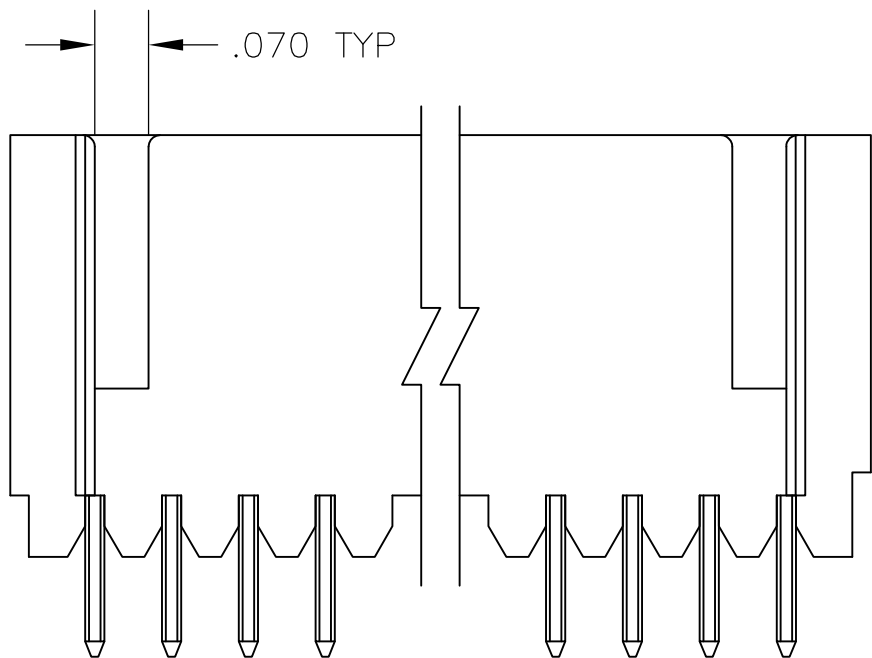

RECOMMENDED HOLE LAYOUT

OBSOLETE 9	8	2.620	2.540	2.400	24	25	7-103080-2			
	8	2.520	2.440	2.300	23	24	7-103080-2			
	8	2.420	2.340	2.200	22	23	7-103080-1			
	8	2.320	2.240	2.100	21	22	7-103080-0			
	8	2.220	2.140	2.000	20	21	6-103080-9			
	8	2.120	2.040	1.900	19	20	6-103080-8			
	8	2.020	1.940	1.800	18	19	6-103080-7			
	8	1.920	1.840	1.700	17	18	6-103080-6			
	8	1.820	1.740	1.600	16	17	6-103080-5			
	8	1.720	1.640	1.500	15	16	6-103080-4			
	8	1.620	1.540	1.400	14	15	6-103080-3			
	8	1.520	1.440	1.300	13	14	6-103080-2			
	8	1.420	1.340	1.200	12	13	6-103080-1			
	8	1.320	1.240	1.100	11	12	6-103080-0			
	8	1.220	1.140	1.000	10	11	5-103080-9			
	8	1.120	1.040	.900	9	10	5-103080-8			
	8	1.020	.940	.800	8	9	5-103080-7			
	8	.920	.840	.700	7	8	5-103080-6			
	8	.820	.740	.600	6	7	5-103080-5			
	7	8	.720	.640	.500	5	6	5-103080-4		
8		.620	.540	.400	4	5	5-103080-3			
8		.520	.440	.300	3	4	5-103080-2			
8		.420	.340	.200	2	3	5-103080-1			
7		6	1.020	.940	.800	8	9	4-103080-0		
7		6	.520	.440	.300	3	4	3-103080-9		
7		6	.420	.340	.200	2	3	3-103080-8		
7		6	.520	.440	.300	3	4	3-103080-7		
7		6	.620	.540	.400	4	5	3-103080-6		
3		OBSOLETE	5	.620	.540	.400	4	5	3-103080-5	
OBSOLETE		5	3.820	3.640	3.500	35	36	3-103080-4		
OBSOLETE		5	3.720	3.540	3.400	34	35	3-	-3	
OBSOLETE		5	3.620	3.440	3.300	33	34	3-	-2	
OBSOLETE		5	3.420	3.340	3.200	32	33	3-	-1	
OBSOLETE		5	3.320	3.240	3.100	31	32	3-	-0	
OBSOLETE		5	3.220	3.140	3.000	30	31	2-	-9	
OBSOLETE		5	3.120	3.040	2.900	29	30	2-	-8	
OBSOLETE		5	3.020	2.940	2.800	28	29	2-	-7	
OBSOLETE		5	2.920	2.840	2.700	27	28	2-	-6	
OBSOLETE		5	2.820	2.740	2.600	26	27	2-	-5	
OBSOLETE	5	2.720	2.640	2.500	25	26	2-	-4		
OBSOLETE 9	5	2.620	2.540	2.400	24	25	2-	-3		
	5	2.520	2.440	2.300	23	24	2-	-2		
	5	2.420	2.340	2.200	22	23	2-	-1		
	5	2.320	2.240	2.100	21	22	2-	-0		
	5	2.220	2.140	2.000	20	21	1-	-9		
	5	2.120	2.040	1.900	19	20	1-	-8		
	5	2.020	1.940	1.800	18	19	1-	-7		
	5	1.920	1.840	1.700	17	18	1-	-6		
	5	1.820	1.740	1.600	16	17	1-	-5		
	5	1.720	1.640	1.500	15	16	1-	-4		
	9	OBSOLETE	5	1.620	1.540	1.400	14	15	1-	-3
	5	1.520	1.440	1.300	13	14	1-	-2		
	5	1.420	1.340	1.200	12	13	1-	-1		
	5	1.320	1.240	1.100	11	12	1-	-0		
	5	1.220	1.140	1.000	10	11		-9		
	5	1.120	1.040	.900	9	10		-8		
	5	1.020	.940	.800	8	9		-7		
	5	.920	.840	.700	7	8		-6		
	5	.820	.740	.600	6	7		-5		
	5	.720	.640	.500	5	6		-4		
9	5	.620	.540	.400	4	5		-3		
	5	.520	.440	.300	3	4		-2		
	5	.420	.340	.200	2	3		-1		
	FINISH	D	C	B	A	NO OF POS	ASSEMBLY PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MARTINELLI CHK -		17AUG92	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H. PALEY PRODUCT SPEC	
0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -		APPLICATION SPEC		NAME	
MATERIAL RETARDANT THERMOPLASTIC, COLOR-BLACK		WEIGHT -		SIZE A1	
POSTS-BRASS		SEE TABLE		00779	
		CUSTOMER DRAWING		SCALE 4:1	
				SHEET 1 OF 1	
				REV V2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103080-6](#)