


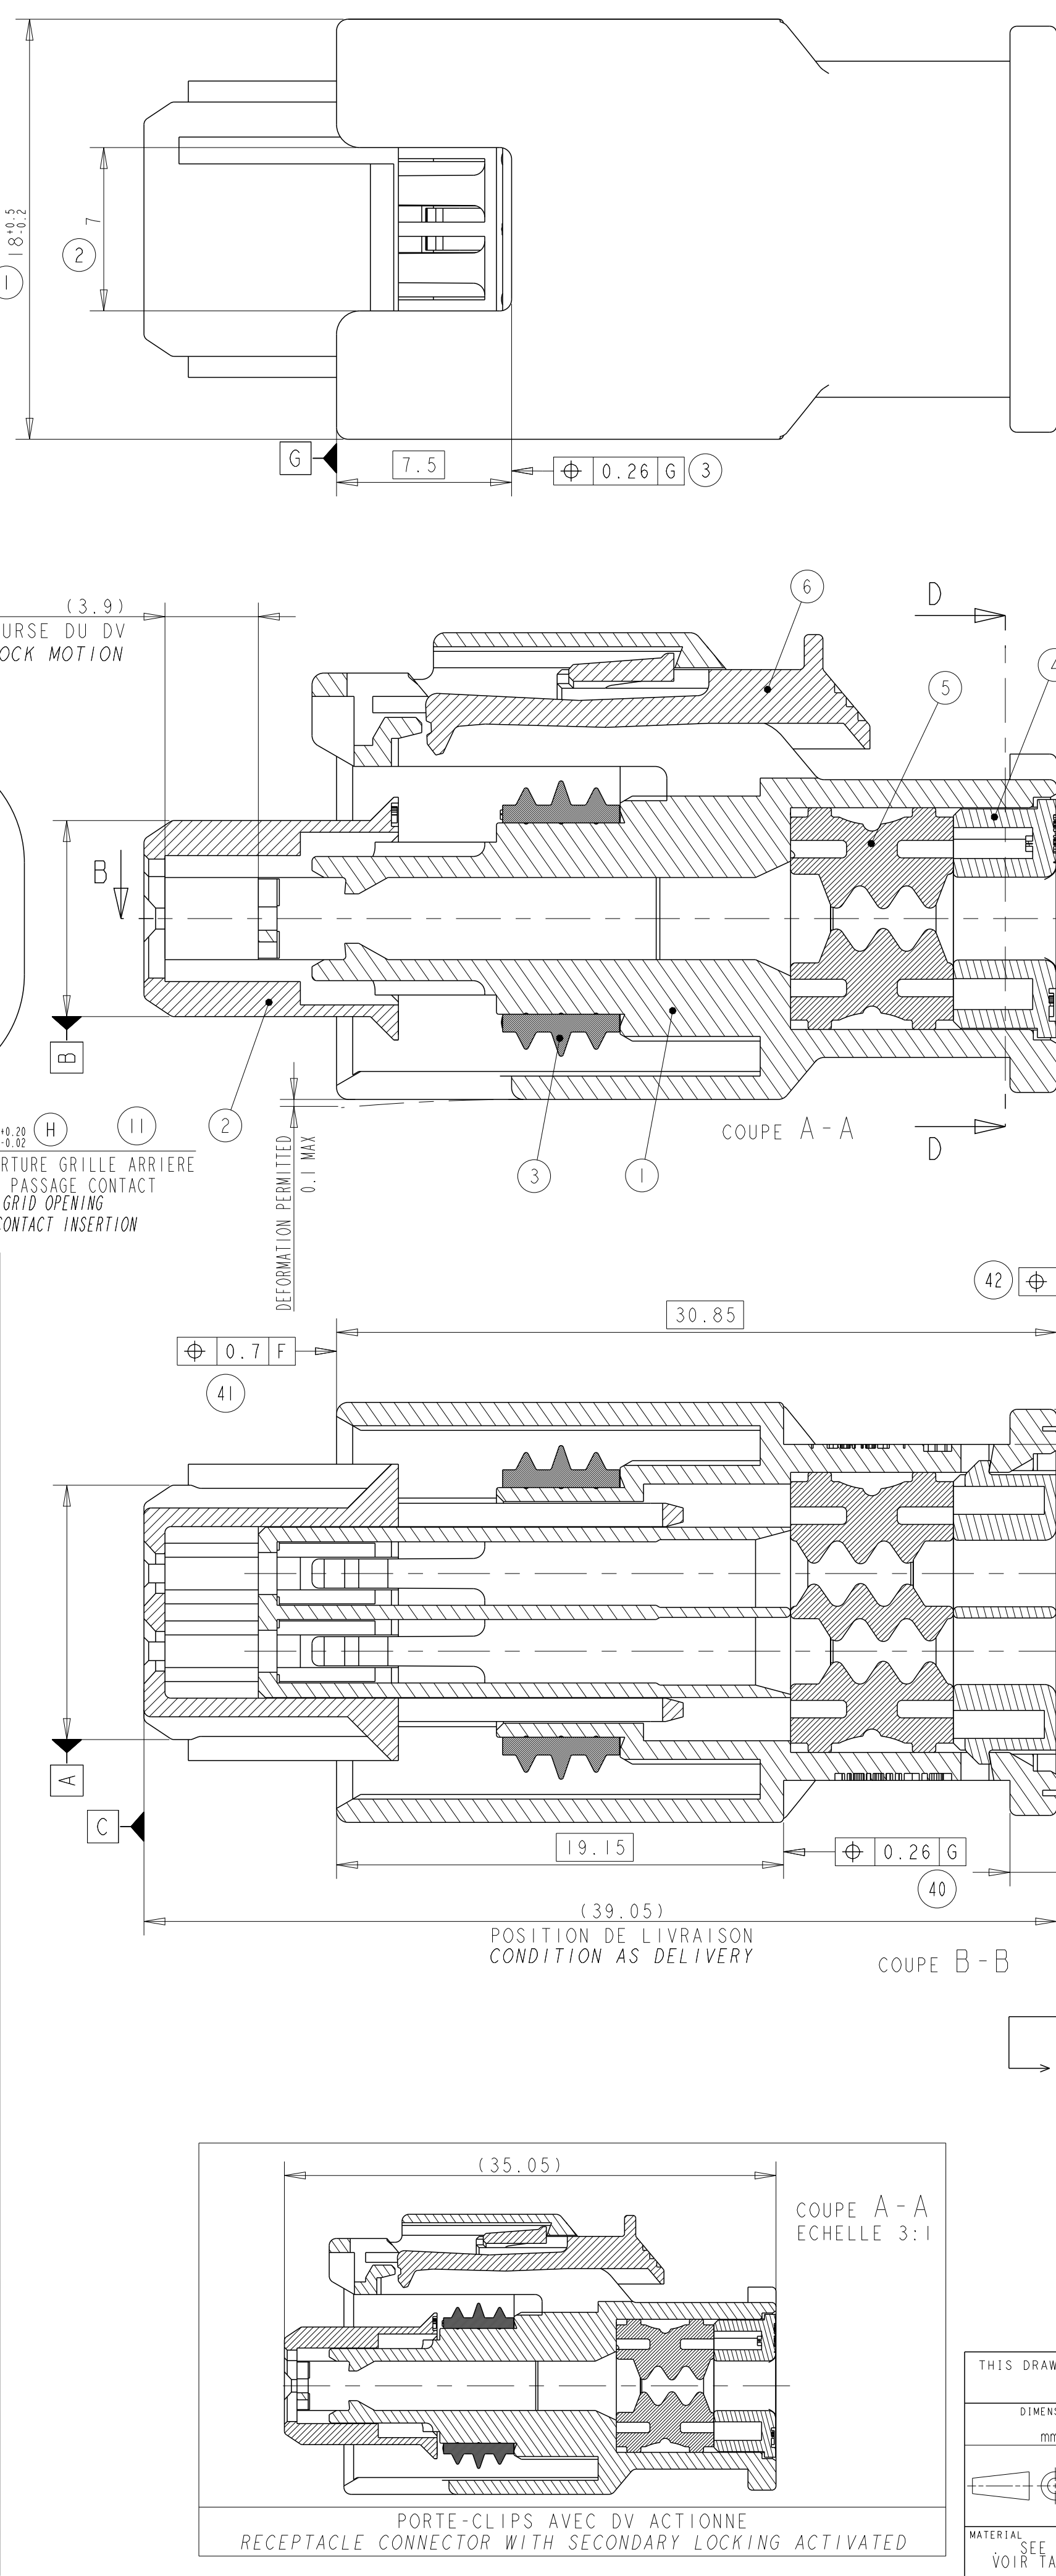


SANS CPA WITHOUT CPA	AVEC CPA WITH CPA	COULEUR ET COTATION DU DETROMPAGE VALABLE POUR VERSION AVEC ET SANS CPA COLOR AND QUOTATION OF THE KEYING DEVICE VALID FOR VERSION WITH AND WITHOUT CPA	
 ECHELLE 1:1	 ECHELLE 1:1		
REF TE NO.	INDICE DE REVISION PRODUIT PRODUCT REVISION NUMBER	REF TE NO.	INDICE DE REVISION PRODUIT PRODUCT REVISION NUMBER
1801175-1	E	I-1801175-1	F
1801175-2	E	I-1801175-2	F
1801175-3	E	I-1801175-3	F
1801175-4	E	I-1801175-4	F
1801175-5	E	I-1801175-5	F
1801175-6	E	I-1801175-6	F
1801175-7	E	I-1801175-7	F
1801175-8	E	I-1801175-8	F
1801175-9	E	I-1801175-9	F

- NOTES/NOTES:
- 1- I-1801175-1 REPRESENTÉ (COD. NOIR) / AS SHOWN (COD. BLACK)
 - 2 REPERE ALVEOLES / CAVITY MARKING
 - 3 LOGO TE / TE LOGO
 - 4 DATE D'ASSEMBLAGE / ASSEMBLY DATE
 - 5 CODE DU LIEU D'ASSEMBLAGE / ASSEMBLY LOCATION DATE
 - E = EUROPE / EUROPE
 - C = CHINE / CHINA
 - M = MERCOSUR / MERCOSUR
 - 6 NUMERO DE LA MACHINE D'ASSEMBLAGE / NUMBER ASSEMBLY LINE
 - 7 REF TE DE L'ASSEMBLAGE (RACINE) / TE ASSEMBLY NO (RACINE)
 - 8 REF TE DE L'ASSEMBLAGE (SUFFIXE) / TE ASSEMBLY NO (SUFFIX)
 - 9 INDICE DE REVISION PRODUIT / PRODUCT REVISION NUMBER
 - 10- PIECES A UTILISER AVEC VOIR TABLEAU "COMPOSANTS ASSOCIES" / MATED WITH : SEE TABLE "ASSOCIATED PARTS"

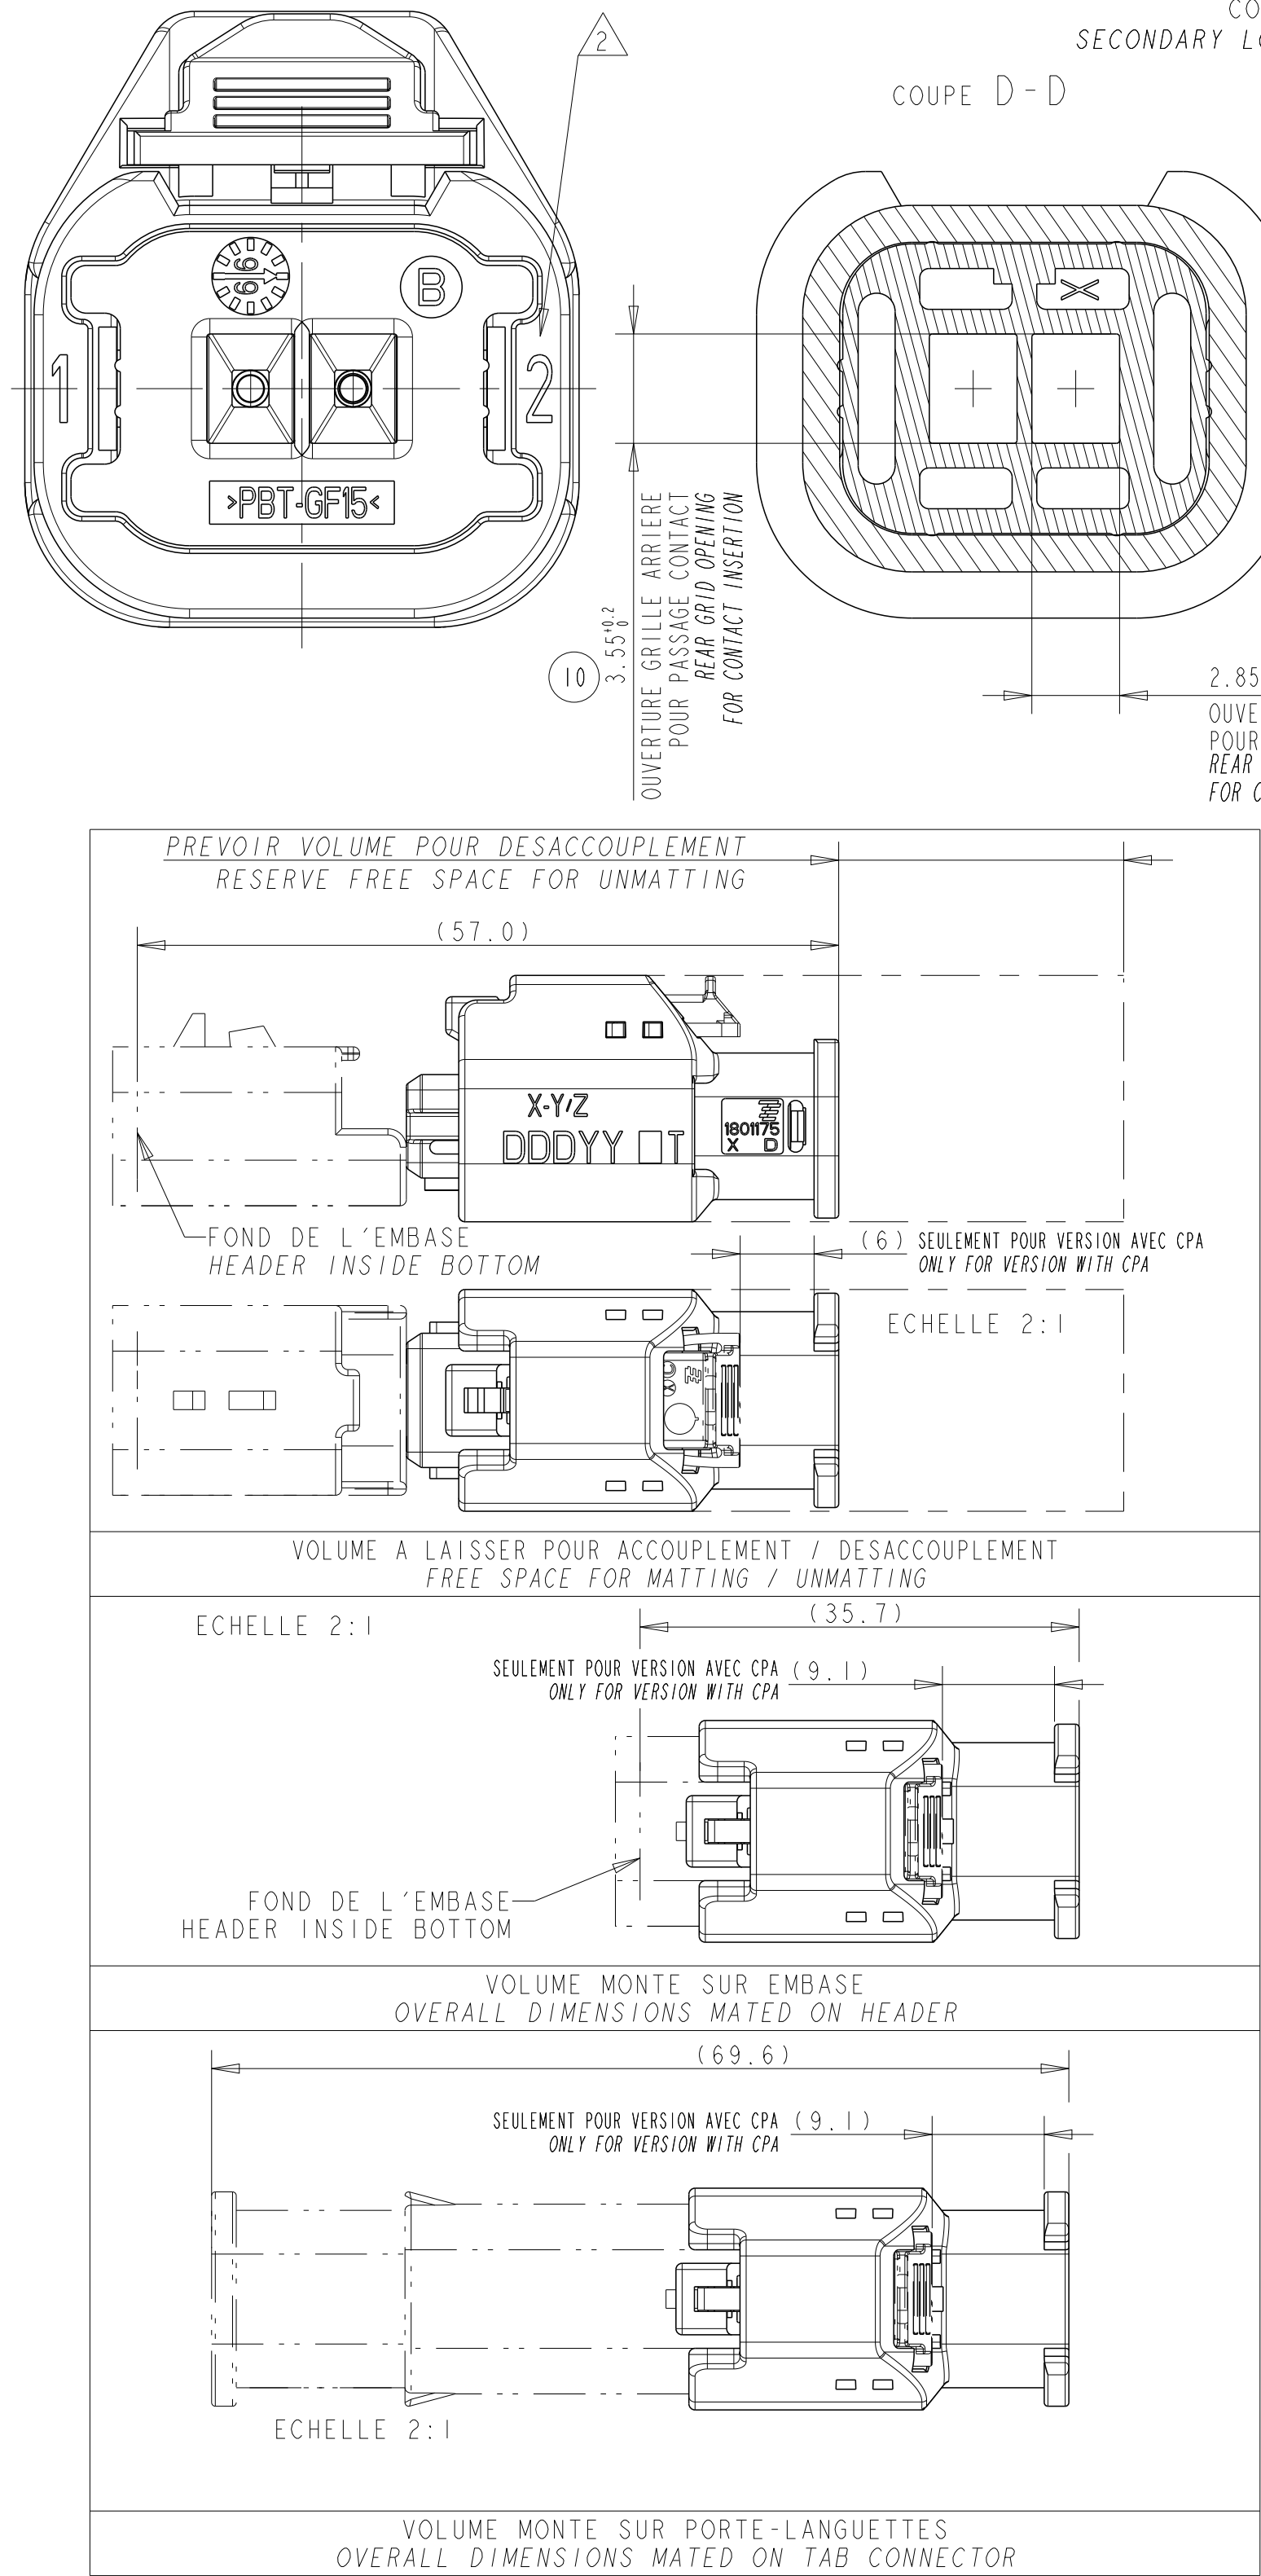

0.2 J F J 5		D La section des câbles utilisés doit être comprise entre 0,35 et 2mm² avec un diamètre d'isolant compris entre 1,40mm mini et 2,80mm Maxi The cross-section of the cables used must be between 0,35 and 2mm² (with insulator diameter included between 1,40mm mini and 2,80mm Maxi)	
CAPOT FIXE 2 VOIES - SORTIE GAUCHE/DROITE FIXED COVER 2 WAYS - LEFT/RIGHT EXIT		POUR GAINÉ ANNELEE DE 6mm FOR CORRUGATED TUBE OF 6mm	1801466-1
CAPOT FIXE 2 VOIES - SORTIE HAUT/BAS FIXED COVER 2 WAYS - UP/DOWN EXIT		POUR GAINÉ ANNELEE DE 4,5mm FOR CORRUGATED TUBE OF 4,5mm	1801466-1
CAPOT FIXE 2 VOIES - SORTIE AXIALE FIXED COVER 2 WAYS - EXIT IN LINE		POUR GAINÉ ANNELEE DE 6mm FOR CORRUGATED TUBE OF 6mm	1801466-2
CAPOT ROTATIF 90 DEG. 2 VOIES ROTATIVE COVER 90 DEG. 2 WAYS		POUR GAINÉ ANNELEE DE 4,5mm FOR CORRUGATED TUBE OF 4,5mm	1801155-5
CLIP 1.5 SENSOR 11 DORE Section 1.4 à 2mm ² RECEPTACLE 1.5 SENSOR 11 GOLD PLATED Section 1.4 to 2mm ²		POUR GAINÉ ANNELEE DE 6mm FOR CORRUGATED TUBE OF 6mm	1801155-5
CLIP 1.5 SENSOR 11 DORE Section 0.75 à 1mm ² RECEPTACLE 1.5 SENSOR 11 GOLD PLATED Section 0.75 to 1mm ²		POUR GAINÉ ANNELEE DE 4,5mm FOR CORRUGATED TUBE OF 4,5mm	1801356-1
CLIP 1.5 SENSOR 11 DORE Section 0.35 à 0.5mm ² RECEPTACLE 1.5 SENSOR 11 GOLD PLATED Section 0.35 to 0.5mm ²		POUR GAINÉ ANNELEE DE 6mm FOR CORRUGATED TUBE OF 6mm	1801356-1
OBTURATEUR "MINI-ETANCHE" "MINI-ETANCHE" PLUGGING PIN			
PORTE-LANGUETTES 2 VOIES HP 2 WAYS TAB CONNECTOR HP			
DESCRIPTION TITLE		TE NO REF TE	
COMPOSANTS ASSOCIES ASSOCIATED PARTS			
SEULEMENT POUR REF. 1-1801175-X ONLY FOR REF. 1-1801175-X			
ORANGE ORANGE	PBT-GF15 (MATIERE: HB) (HB MATERIAL)	CPA CPA	6
VERT GREEN	SILICONE LUBRIFIE A 5% ; DURETE 30 SHORE A LUBRICATED SILICON TO 5% ; HARNESS 30 SH. A	JOINT GROMMET GROMMET SEAL	5
NOIR BLACK	PBT-GF15 (MATIERE: HB) (HB MATERIAL)	GRILLE ARRIERE REAR GRID	4
VERT GREEN	SILICONE LUBRIFIE A 4% ; DURETE 50 SHORE A LUBRICATED SILICON TO 4% ; HARNESS 50 SH. A	JOINT INTERFACIAL INTERFACE SEAL	3
VOIR TABLEAU DES REF. SEE TABLE OF PART NO	PBT-GF15 (MATIERE: HB) (HB MATERIAL)	DOUBLE VERROUILLAGE CODAGE (VOIR TABLEAU DES REFS) SECONDARY LOCKING CODING (SEE TABLE OF PART NO)	2
NOIR BLACK	PBT-GF15 (MATIERE: HB) (HB MATERIAL)	BOITIER PORTE-CLIPS RECEPTACLE HOUSING	1
COULEUR COLOR	MATIERE MATERIAL	DESCRIPTION TITLE	REP. ITEM
THIS IS A CONTROLLED DOCUMENT.			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC ±		1 PLC ±0.2	
2 PLC ±		3 PLC ±	
4 PLC ±		5 PLC ±	
MATERIAL SEE TABLE VOIR TABLEAU		FINISH	
DWN F. JODON 20JUN2007		CHK X. ROUILLARD 27JUN2007	
APVD X. ROUILLARD 27JUN2007		PRODUCT SPEC	
108-15378		APPLICATION SPEC	
411-15712		WEIGHT 5,9g / 6,7g with CPA	
Customer Drawing		Customer Drawing	
SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
A100779		C=1801175	
SCALE 5:1		SHEET 1 OF 1	
REV H		REV H	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1801175-1](#)