


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
© COPYRIGHT - By -

REVISIONS
LOC FT DIST 0
P LTR Y REVISED PER ECO-12-012316
DESCRIPTION DATE DWN APVD
05JUL12 KH MZ

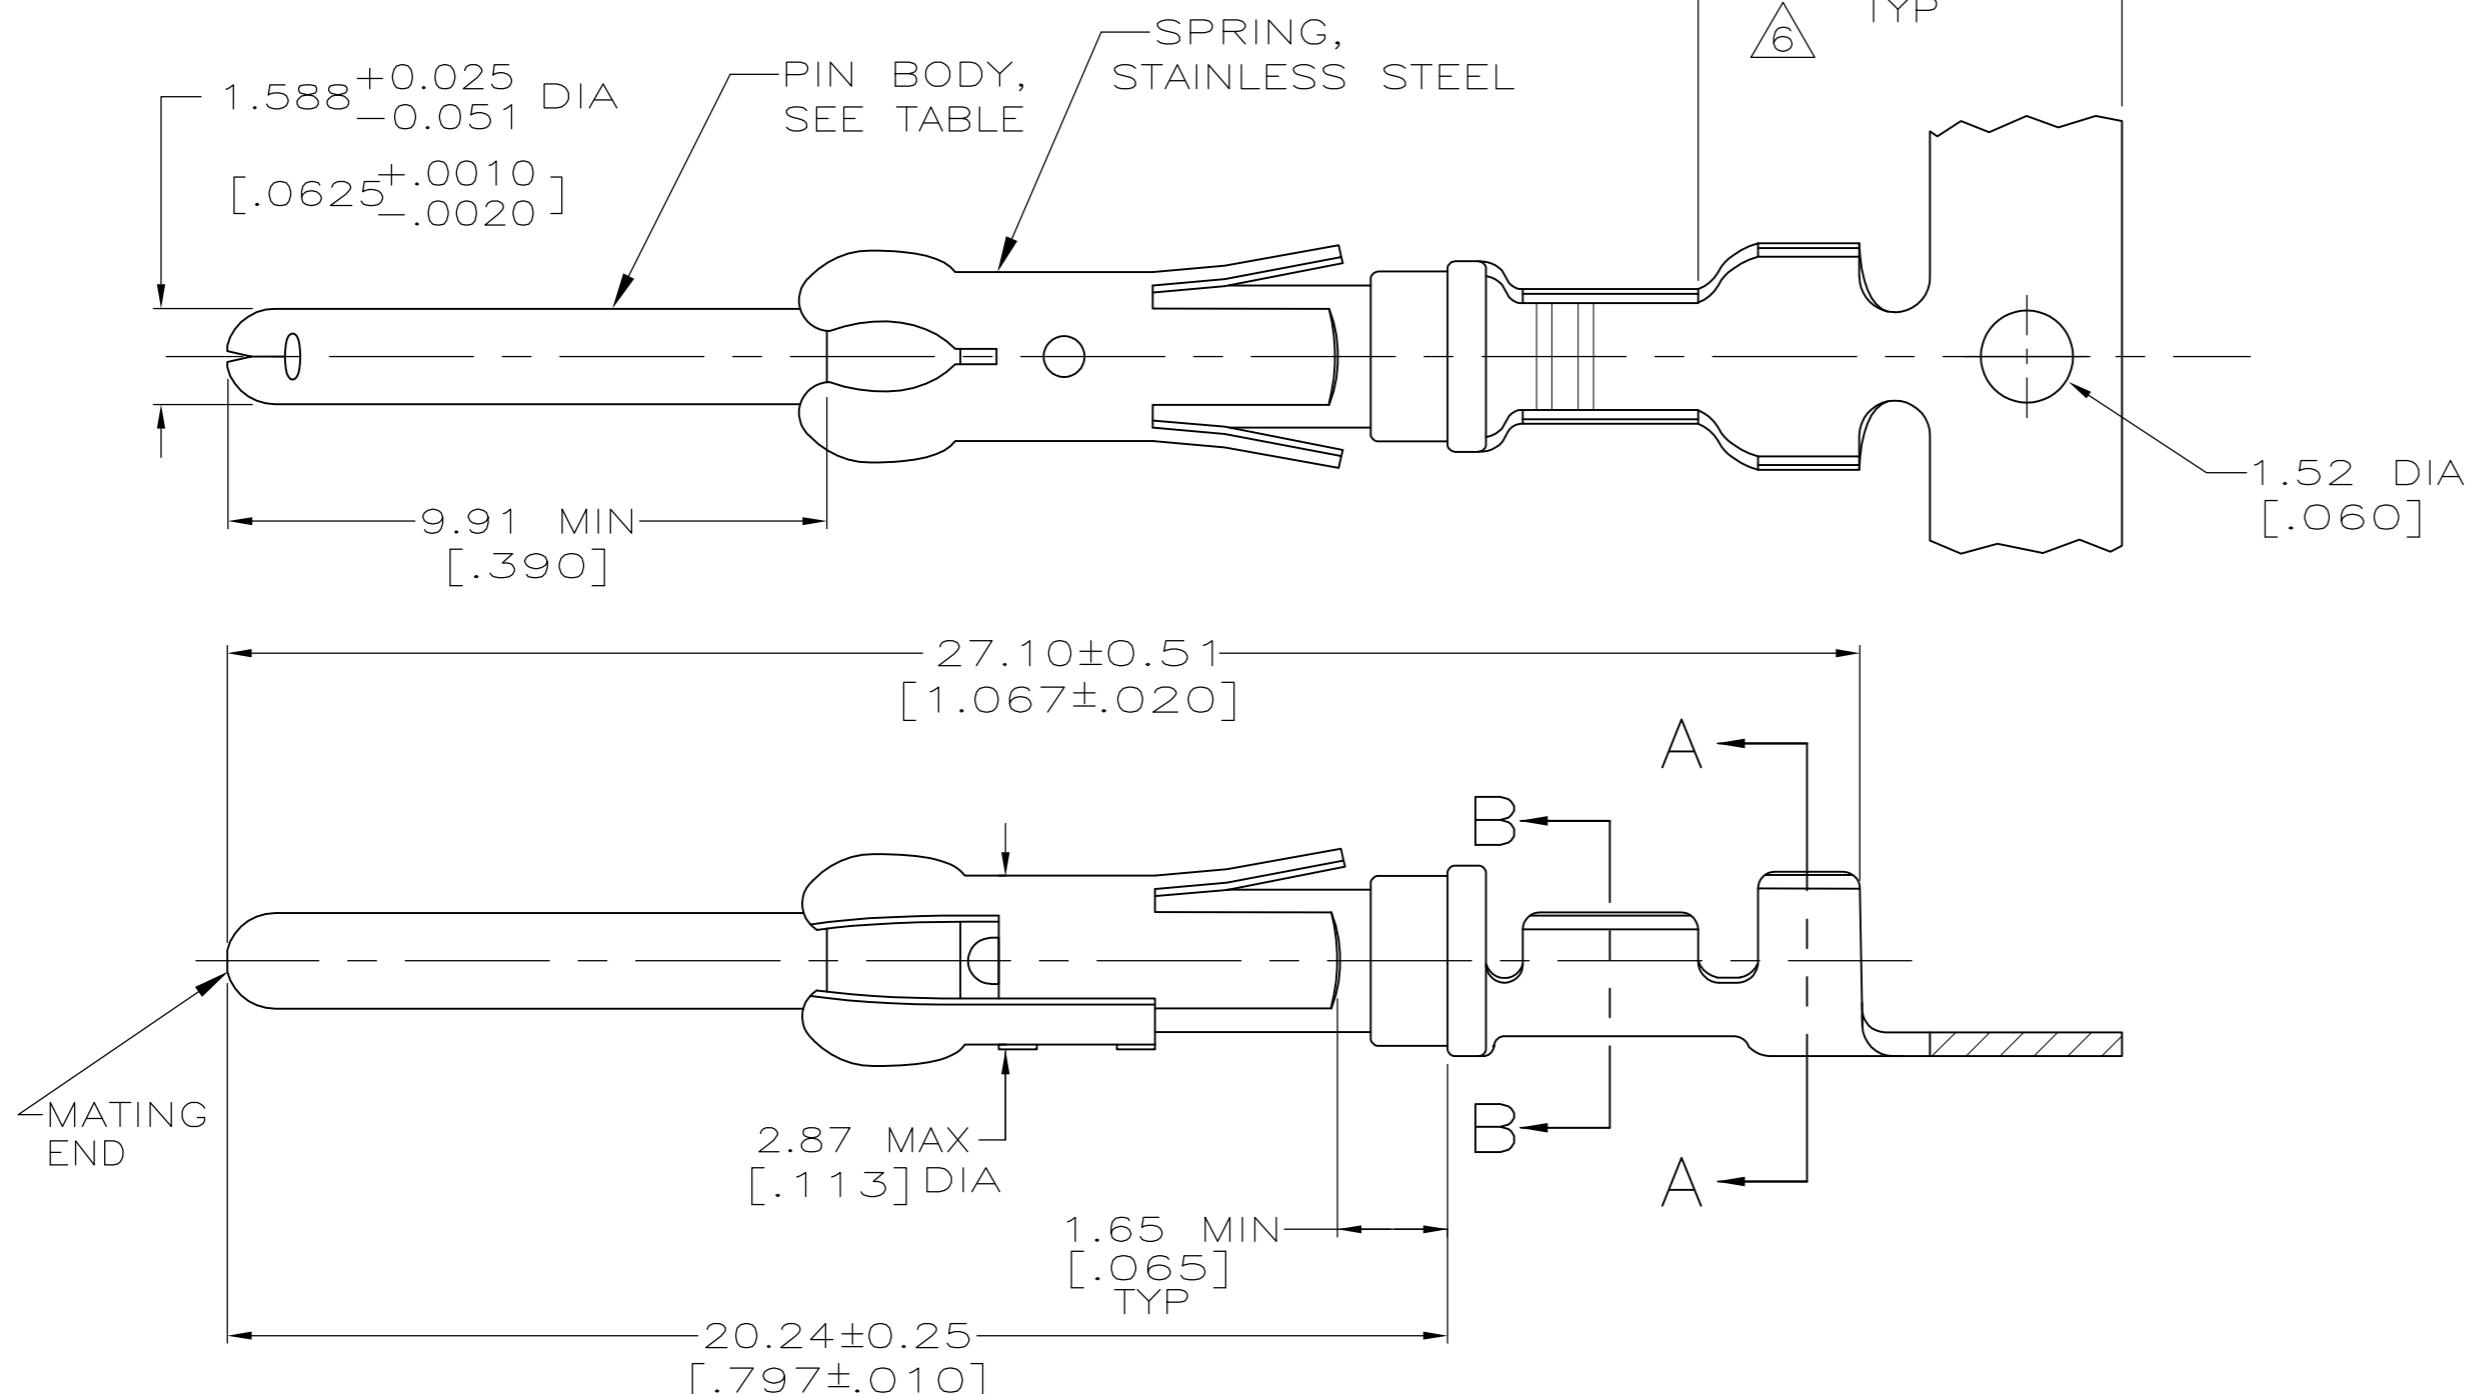

1 REVERSE REELED FOR MINI-APPLICATOR.

2 0.76µm[.000030] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm[.000050]MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL PLATE. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS).

3 0.76µm[.000030] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25µm [.000010] ON REMAINDER, OVER 1.27µm[.000050] MIN NICKEL PLATE. GOLD FLASH ALL OVER. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS).

4 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm[.000050]MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.

5 1.27µm [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 3.81µm [.000150] MIN NICKEL PER QQ-N-290.

6 GOLD PLATING NEED NOT APPEAR IN THIS AREA.

7 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.


8 WIRE RANGE 24-20 AWG.

9 INSULATION RANGE 2.03[.080]-2.54[.100] DIA.


10 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.

11 1.27µm [.000050] MIN TIN PER MIL-T-10727 OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.

12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

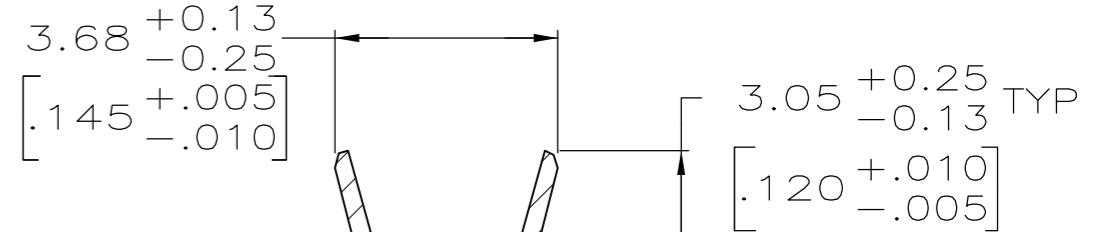


SECTION A-A

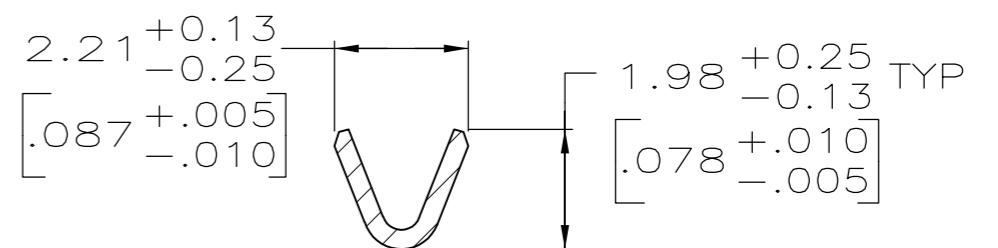

SECTION B-B

12	OBsolete	STANDARD	11	BRASS	1-66400-0	1-66332-5
	1	11		BRASS	1-66400-0	1-66332-4
	1	2		PHOSPHOR BRONZE	-	1-66332-3
	1	10		BRASS	66400-5	1-66332-2
	1	5		BRASS	-	1-66332-1
	1	2		BRASS	66400-4	66332-8
	1	4		BRASS	66400-3	66332-7
	1	3		BRASS	66400-2	66332-6
	1	7		BRASS	66400-1	66332-5
	2			BRASS	66400-4	66332-4
	4			BRASS	66400-3	66332-3
	7			BRASS	66400-1	66332-1
	REELING	PIN BODY FINISH		PIN BODY	LOOSE PIECE REF	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		7-18-91
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		R.SHIREY 7-18-91 R.STONE 8-15-91 APVD J.WESTMAN 8-19-91 PRODUCT SPEC — APPLICATION SPEC — MATERIAL SEE CALLOUTS FINISH SEE TABLE
SIZE	CAGE CODE	DRAWING NO
A2	00779	C-66332
CUSTOMER DRAWING		RESTRICTED TO
SCALE 8:1		REV Y

TE

TE Connectivity

CONTACT, PIN,
.062 , TYPE III+

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66332-1](#) [66332-3](#) [66332-4](#)