

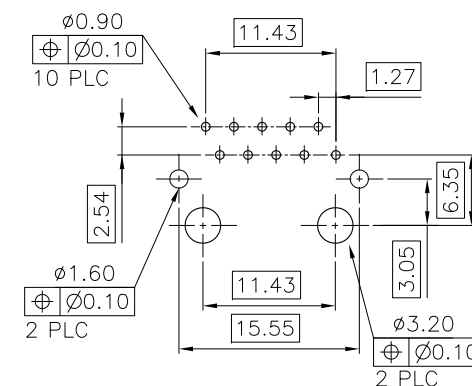


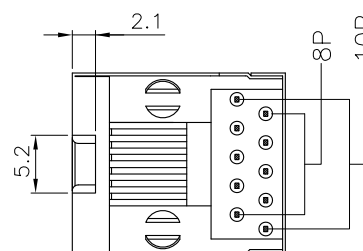

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

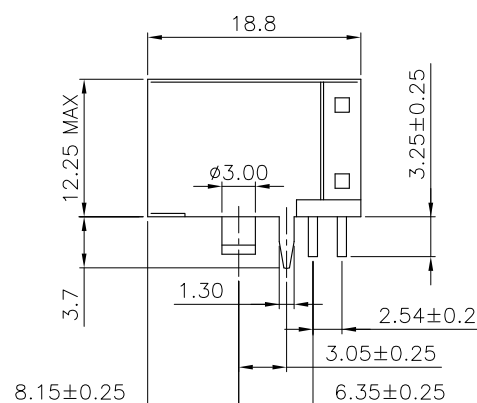

5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	10P8C	RED	50μ"	3-1734580-4
			30μ"	3-1734580-3
			15μ"	3-1734580-2
			6μ"	3-1734580-1
OBSOLETE	10P10C	BLACK	50μ"	1-1734580-4
			30μ"	1-1734580-3
			15μ"	1-1734580-2
			6μ"	1-1734580-1
OBSOLETE	10P8C △	BLACK	50μ"	1734580-8
			30μ"	1734580-7
			15μ"	1734580-6
			6μ"	1734580-5
OBSOLETE	10P8C	BLACK	50μ"	1734580-4
			30μ"	1734580-3
			15μ"	1734580-2
			6μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

SCALE	—	SHEET	1 OF 2	REV	B3
-------	---	-------	--------	-----	----

SEE NOTE

SEE NOTE

CUSTOMER DRAWING

TE Connectivity

MODULAR JACK, RJ45, 8P8C, SHIELDED,
SIDE ENTRY, LOW PROFILE

RESTRICTED TO

734580

00000

SCALE _____

2 | REV B3

D

D

C



C

B



B

A

A

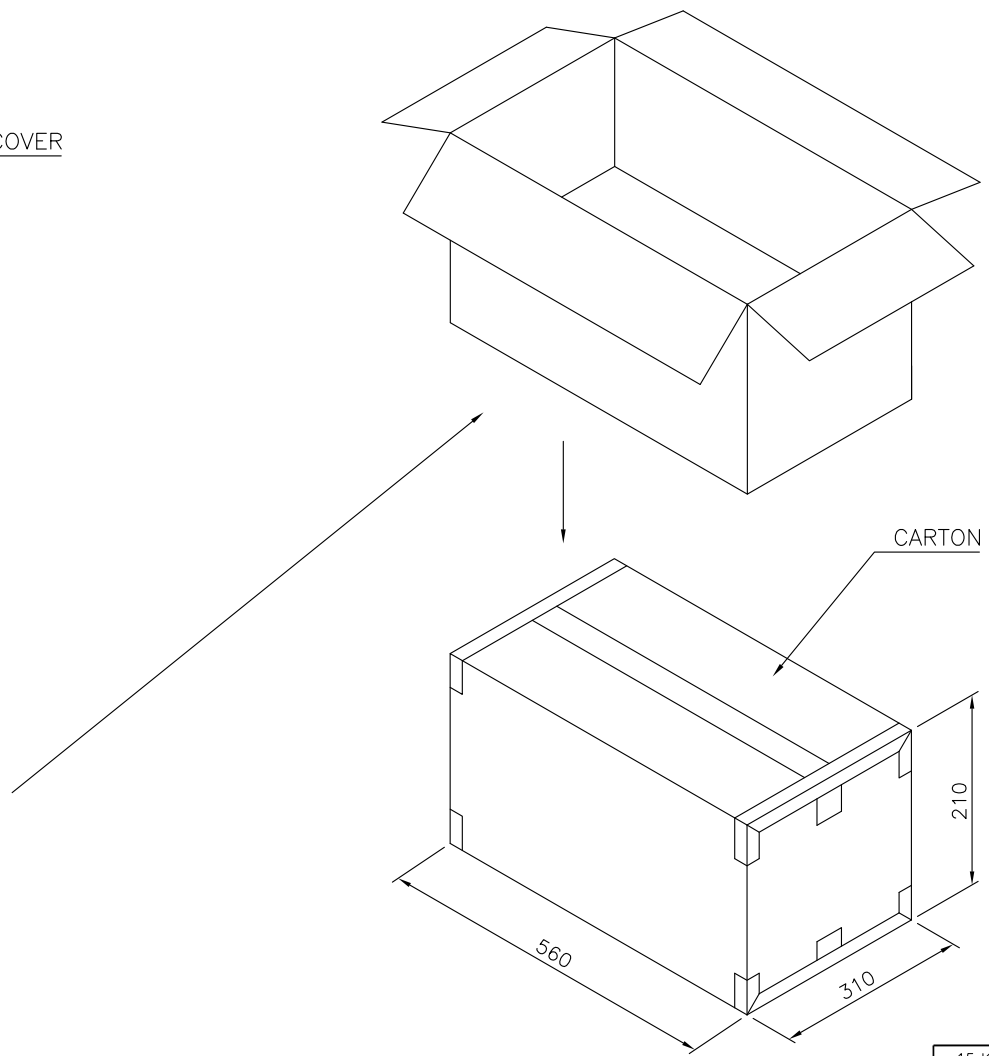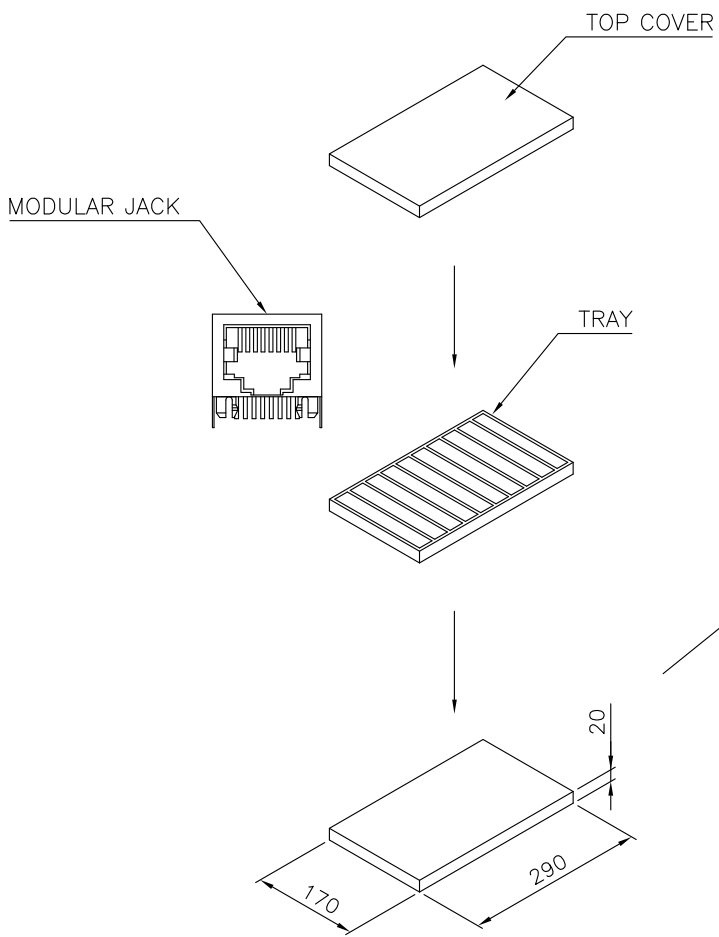

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 01JUN2007	 TE Connectivity						
DIMENSIONS: MM		CHK S. HOU 01JUN2007							
		APVD W.J. KE 01JUN2007	NAME MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE						
		PRODUCT SPEC —							
				APPLICATION SPEC —	SIZE A3		CAGE CODE 00779	DRAWING NO C=1734580	RESTRICTED TO —
				WEIGHT —					
MATERIAL —		CUSTOMER DRAWING		SCALE —		SHEET 2 of 2		REV B3	
TOLERANCES UNLESS OTHERWISE SPECIFIED:									
0 PLC ± —									
1 PLC ± —									
2 PLC ± —									
3 PLC ± —									
4 PLC ± —									
ANGLES ± —									
FINISH —									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1734580-1](#)