
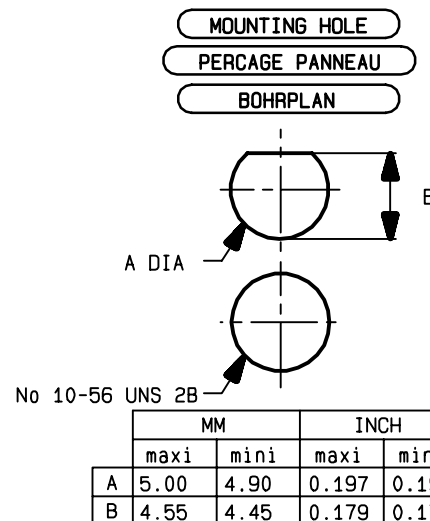


BULKHEAD JACK RECEPTACLE

FRONT MOUNT - WITH CYLINDRICAL CONTACT

R113.553.000

SERIES MCX

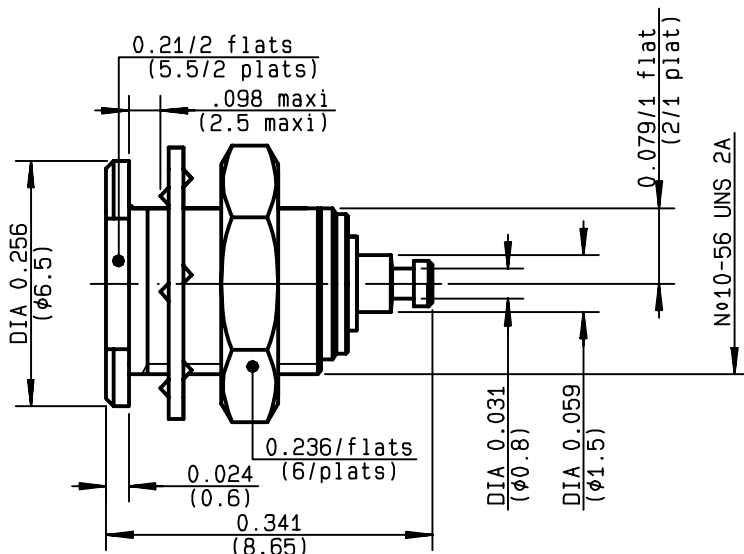

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-6	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.05 + .015 x F(GHz)Maxi	
RF INSERTION LOSS	0.03 $\sqrt{F}$ (GHz) dB Maxi	
VOLTAGE RATING	335	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1000	Veff Mini
INSULATION RESISTANCE	1000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	.84	gr
SPECIFICATION		

CABLES :

OTHERS CHARACTERISTICS

CABLE RETENTION	NA	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	10	N Mini
Axial force - opposite end	10	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	60	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS. MATERIALS

BODY	BRASS
OUTER CONTACT	
CENTER CONTACT	
INSULATOR	PTFE
GASKET	
OTHERS PIECES	BRASS

FINISH (all values are given in micrometers)

GOLD 0.2 OVER NICKEL 2
GOLD 1.3 OVER NICKEL 2
-
-
GOLD 0.2 OVER NICKEL 2

BAFFERT

ISSUE
9841B04

CREATION DATE
30/08/1988

FILE PART-NUMBER



RADIALL[®]

The information given here is subject to change without notice.
Design changes may be in order to improve the product.

Connect to the future

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R113553000W](#)