


May.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

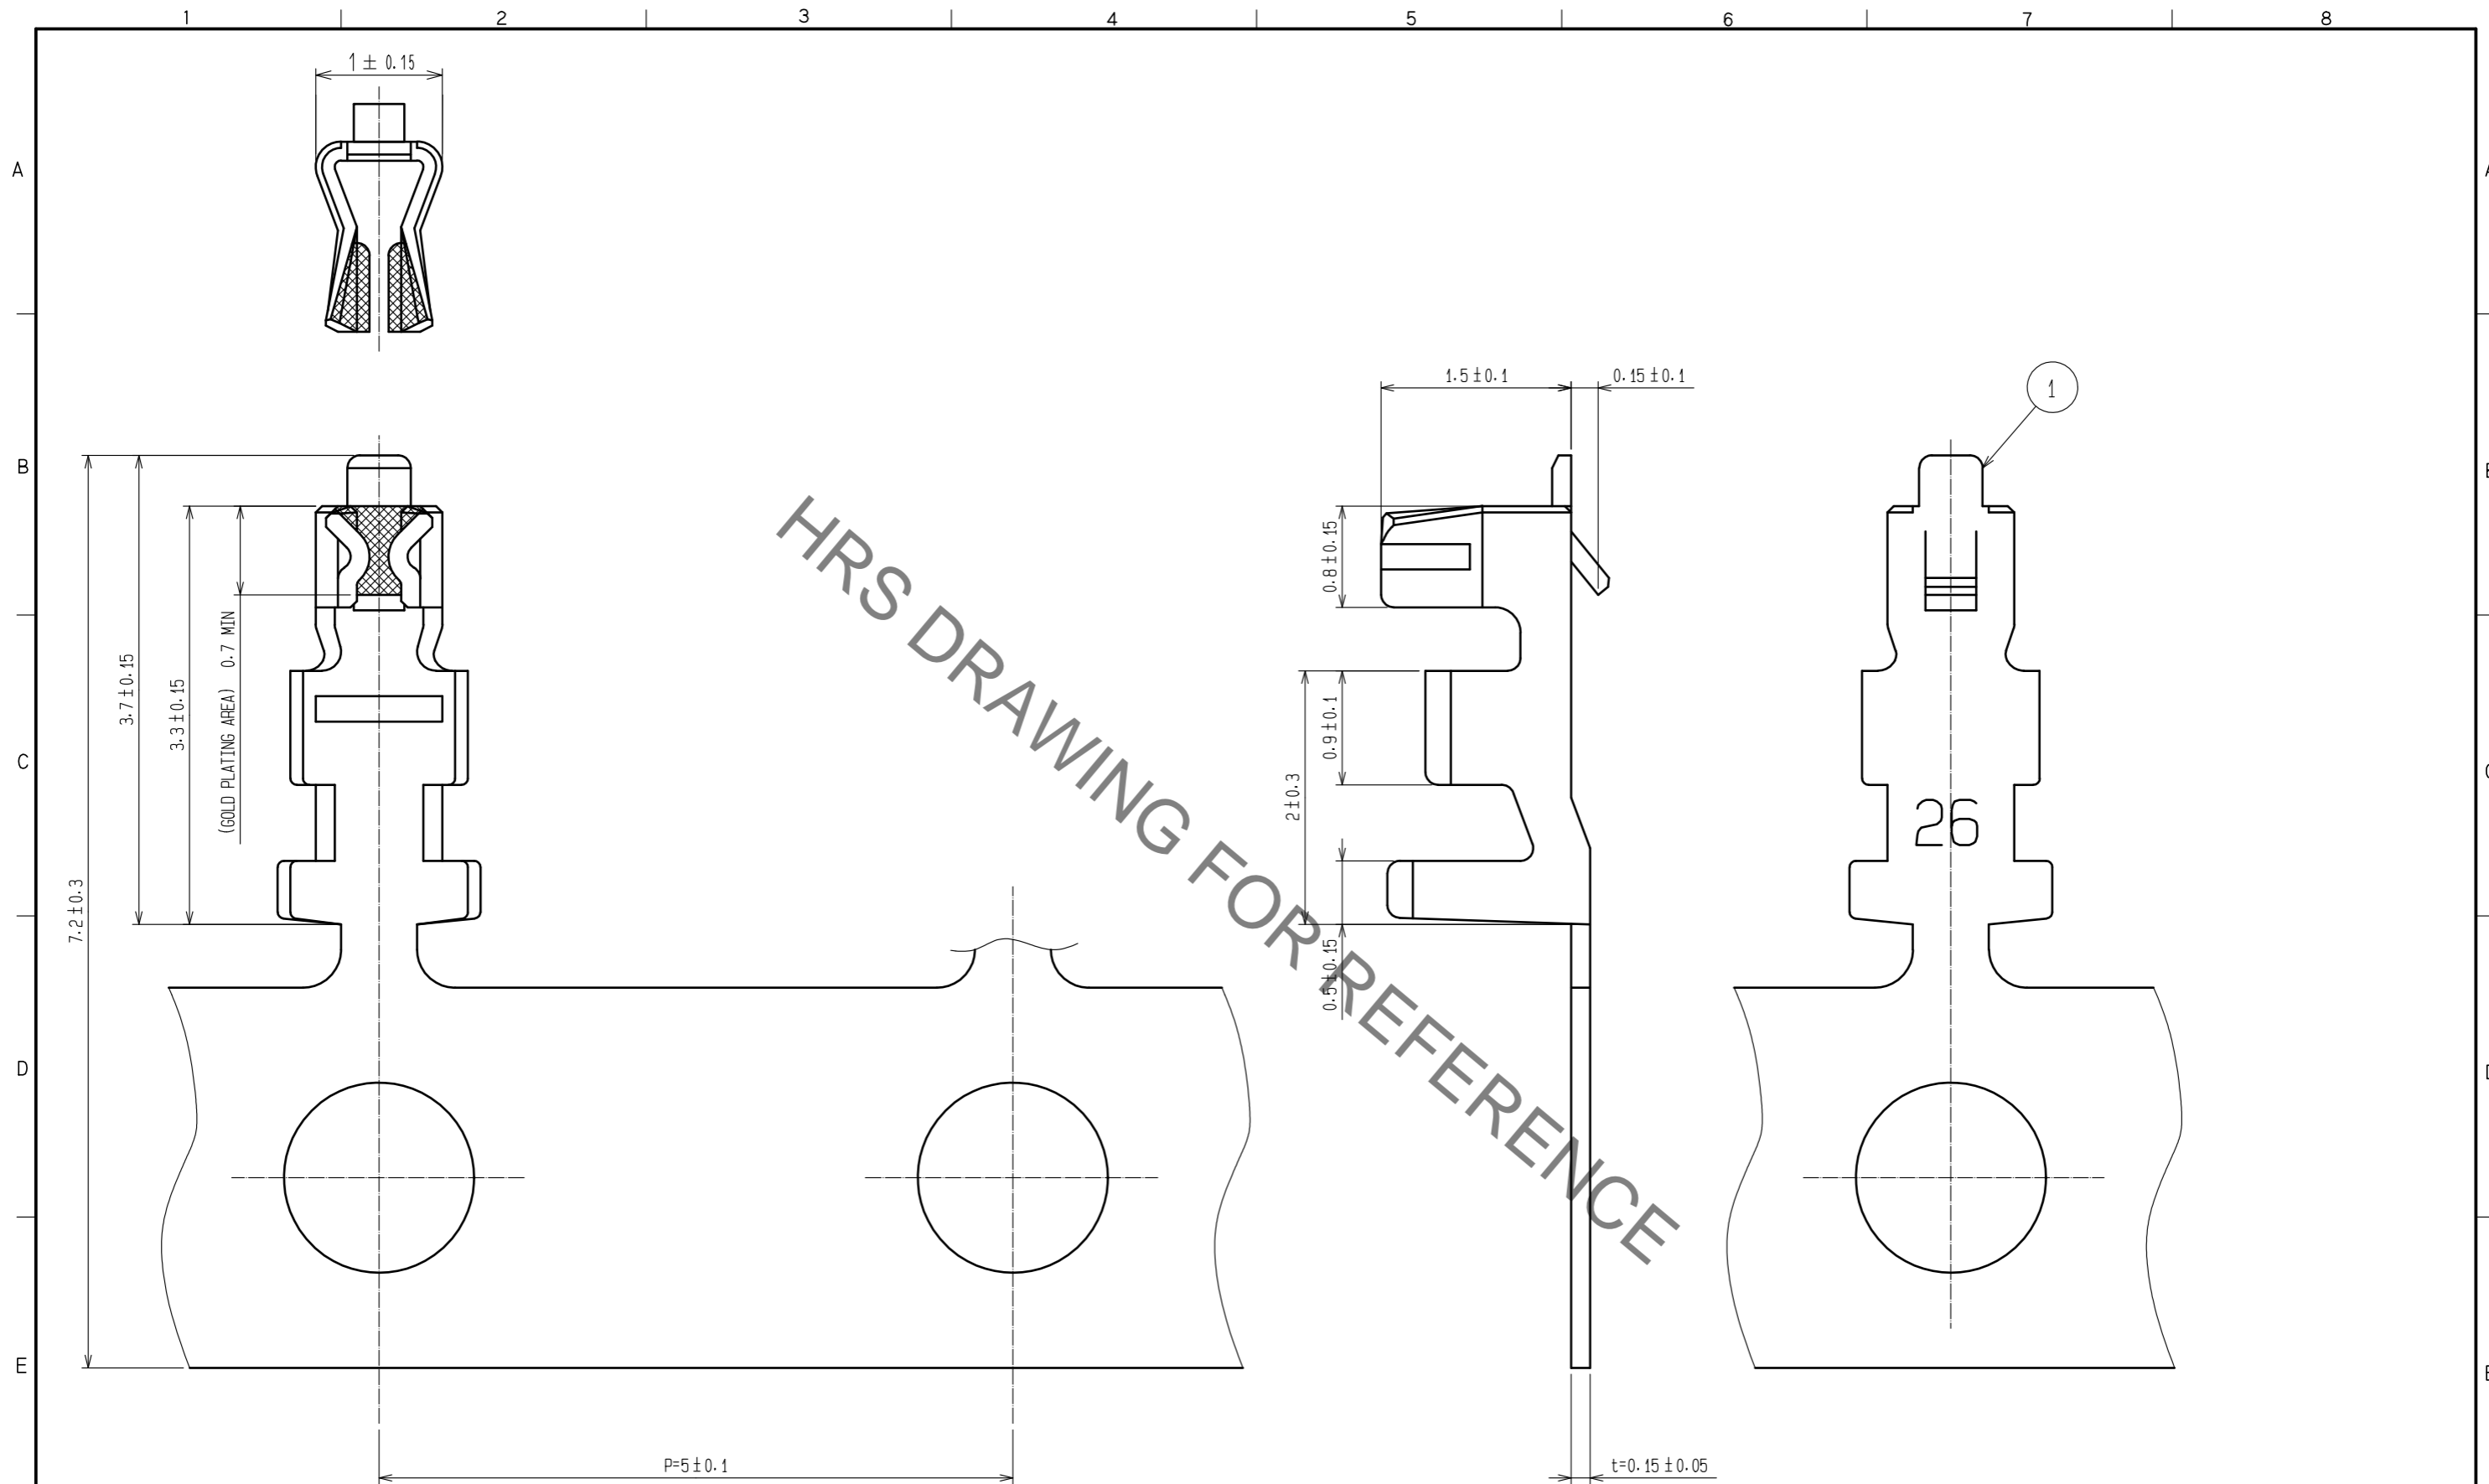

NOTES 1: APPLICABLE WIRE : 26 - 30 AWG  
 2: 1 REEL 10000 CONTACTS  
 △ OUTER DIAMETER :  $\phi 0.56 - \phi 1.0$  mm

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
1	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATING 0.2 $\mu$ m min OTHERS:NICKEL PLATING 0.5 $\mu$ m min					
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		20: 1	1	DIS-H-00004809	HT. SATO	SZ. ONO	20190425
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KATAYOSE	20050105	DRAWING NO.	EDC-071220-00-00		
		CHECKED : TY. OMA	20050105	PART NO.	DF13-2630SCFA		
		DESIGNED : TS. KUMAZAWA	20050105	CODE NO.	CL536-0298-5-00		
		DRAWN : TS. KUMAZAWA	20050105		△ 1/1		