


| PANDUIT<br>PART NUMBER | STUD<br>SIZE | DIMENSIONS in. |              |              |               |              |
|------------------------|--------------|----------------|--------------|--------------|---------------|--------------|
|                        |              | A $\pm .020$   | W $\pm .010$ | C $\pm .020$ | M $\pm .020$  | H $\pm .010$ |
| P18-6LF                | #6           | .68<br>(17,3)  | .27<br>(6,9) | .22<br>(5,6) | .48<br>(12,2) | .15<br>(3,8) |
| P18-6LFW               | #6           | .70<br>(17,8)  | .29<br>(7,4) | .22<br>(5,6) | .48<br>(12,2) | .15<br>(3,8) |
| P18-8LF                | #8           | .74<br>(18,8)  | .29<br>(7,4) | .23<br>(5,8) | .53<br>(13,5) | .16<br>(4,1) |
| P18-10LF               | #10          | .74<br>(18,8)  | .33<br>(8,4) | .23<br>(5,8) | .53<br>(13,5) | .19<br>(4,8) |
| P18-10LFN **           | #10          | .74<br>(18,8)  | .28<br>(7,1) | .23<br>(5,8) | .53<br>(13,5) | .19<br>(4,8) |

## NOTES :

- UL LISTED AND CSA CERTIFIED FOR:  
A. #22-16 AWG SOLID OR STRANDED, COPPER WIRE
- 302°F (150°C) MAX. USE TEMP.
- PACKAGE QTY.: STD C=100  
BULK M=1000
- MATERIAL:  
A. STAMPING - .032 (,81) THK COPPER, TIN PLATED
- WIRE STRIP LENGTH  $9/32^{+1/32}_{-0}$  (7,1<sup>+,8</sup><sub>-0</sub>)
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:  
A. UL AND CSA APPROVED: CT-100, CT-200, CT-1570 \*  
B. PANDUIT APPROVED: CT-160, CT-260

\* APPROVED FOR EXPANDED WIRE RANGE #22-16 AWG

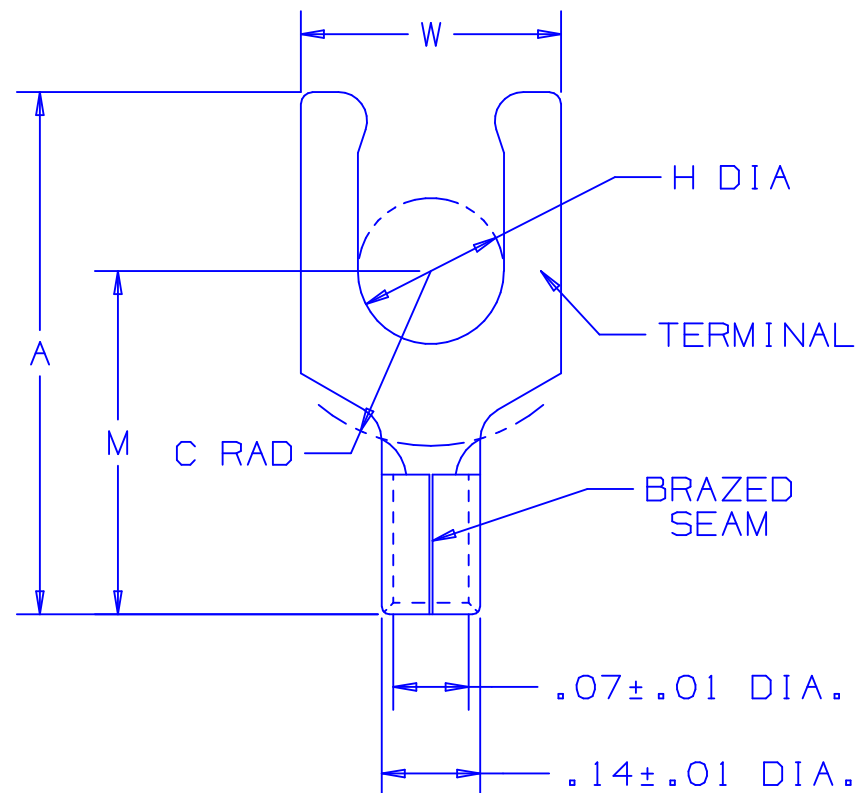

\*\* P18-10LFN IS NOT UL LISTED OR CSA CERTIFIED

LISTED  
587H  
E52164CERTIFIED  
LR31212

A41059\_07

|     |      |     |     |                                                              |       |      |     |                                                                                                                                           |             |               |                       |
|-----|------|-----|-----|--------------------------------------------------------------|-------|------|-----|-------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------|-----------------------|
| 07  | 2/01 | EJS |     | FILE SPEC WAS N41059AA_PCD_06,<br>REMOVED CT-570 FROM NOTE 7 |       |      |     |  <div>PANDUIT CORP.      TINLEY PARK, ILLINOIS</div> |             |               |                       |
| 06  | 1/96 | ED  | RLS | REV'S TO NOTES & DIM'S,<br>ORIG FILE SPEC WAS NPC-A41059-05  | 03801 | LA   | DBH |                                                                                                                                           |             |               |                       |
| 05  | 3/91 | DL  |     | TANG WIDTH INCREAED PART NO P18-6LF                          |       |      |     |                                                                                                                                           |             |               |                       |
| --  | --   | --  | --  | REDRAWN ON CAD WITH REVISIONS                                |       | --   | --  |                                                                                                                                           |             |               |                       |
| REV | DATE | BY  | CHK | DESCRIPTION                                                  | ECN   | CUST | PM  | DRAWN BY<br>DRL                                                                                                                           | CHK'D<br>LA | SCALE<br>NONE | DRAWING NO.<br>A41059 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[P18-8LF-M](#) [P18-6LF-C](#) [P18-8LF-C](#) [P18-10LF-M](#) [P18-6LFW-C](#) [P18-10LF-C](#) [P18-10LFN-C](#) [P18-6LF-M](#)