


- ⚠ NON DISPONIBILE DALL' AMP ITALIA (NOT AVAILABLE FROM AMP ITALY)
- ⚠ ADATTO PER AMP-0-MATOR (REVERSE REELED FOR MINI APPLICATOR)
- ⚠ BOBINA IN CARTONE CON CARTA INTERPOSTA QUANTITA' PER BOBINA: 3000 (CARTON REEL WITH INTERPOSED PAPER STRIP Q.TY FOR REEL: 3000)
- ⚠ STATO DI FORNITURA SCALA 1:1 (SUPPLYING CONDITION SCALE 1:1)

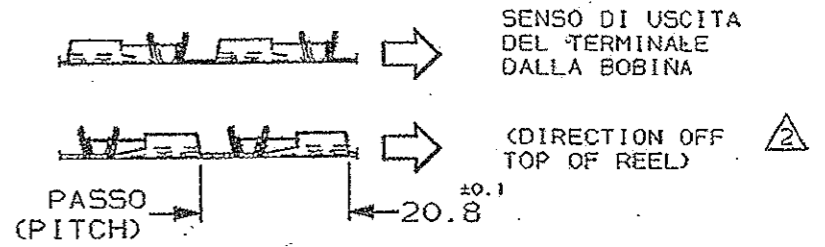

- ⚠ SPECIFICA DI AGGRAFFATURA 114-20088. (APPLICATION SPEC. 114-20088).
- ⚠ BOBINA IN CARTONE CON CARTA INTERPOSTA QUANTITA' PER BOBINA: 2500 (CARTON REEL WITH INTERPOSED PAPER STRIP Q.TY FOR REEL: 2500)
- ⚠ BOBINATO CON CARTA INTERPOSTA (REELED WITH INTERLEAVE PAPER STRIP)
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | | | |
|------------|---|---------------------------|----------------------|----------------------|-----|
| ⚠ OBSOLETE | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 4-180464-1 | AU |
| | ⚠ | NUDO (UNPLATED) | BR. F. (PH. BR.) | 2-180464-4 | AU |
| | ⚠ | NUDO (UNPLATED) | OTTONE (BRASS) | 2-180464-1 | AU |
| | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 1-180464-2 | AW |
| | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 1-180464-1 | O |
| | ⚠ | ARGENTATO (SILVER PLATED) | OTTONE (BRASS) | 0-180464-9 | AU |
| | ⚠ | STAGNATO (TIN PLATED) | BR. F. (PH. BR.) | 0-180464-5 | AU |
| | ⚠ | NUDO (UNPLATED) | BR. F. (PH. BR.) | 0-180464-4 | AU |
| | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 0-180464-2 | AW |
| | ⚠ | NUDO (UNPLATED) | OTTONE (BRASS) | 0-180464-1 | AW |
| ⚠ OBSOLETE | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 1-180397-2 | AU |
| | ⚠ | STAGNATO (TIN PLATED) | BR. F. (PH. BR.) | 0-180397-5 | AU |
| | ⚠ | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 0-180397-2 | AU |
| | | NUDO (UNPLATED) | OTTONE (BRASS) | 0-180397-1 | AU |
| NOTE | | FINITURA (FINISH) | MATERIALE (MATERIAL) | NUMERO (PART NUMBER) | REV |

CUSTOMER DWG. FOR REFERENCE ONLY
 DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION 13

| | | | |
|--|----------------------------------|-------------------------|---------------|
| TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED) | DIAH. ISOLANTE (INS. DIA. RANGE) | RANGO FILO (WIRE RANGE) | SCALA (SCALE) |
| ± 0.3 | 2.4-3.8 | 1-2.5 | 4:1 |

ANGOLI (ANGLES) ± 2°

STE TE Connectivity

DIS. 28 APR 97 (DR.) A. FROLA
 CONT. 29 APR 97 (CHK) G. TURCO

DESCRIZIONE (DESCRIPTION) FASTON® Connector .250" sr. FLAG REC. CONTACT

| | | | | | | | |
|-------------|-----------------------------|------------|-------------|-----------|------------------|------|---------------|
| AW7 | REVISED PER ECO-11-005140 | RK | APP. (APP.) | LOC. SIZE | NUMERO (CNSG NO) | REV. | FOLIO (SHEET) |
| REV. (REV.) | REVISIONI (REVISION RECORD) | DIS. (DR.) | DATA (DATE) | I A3 | C-180397 | AW7 | 1 OF 1 |

DISTRIBUZIONE (PRINT DIST.)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[180464-5](#)