



LOC		DIST		REVISONS			
FX		00		DATE	DWN	APVD	
				19MAY2009	DLD	WTW	


KEYING OPTIONS
SCALE 2:1

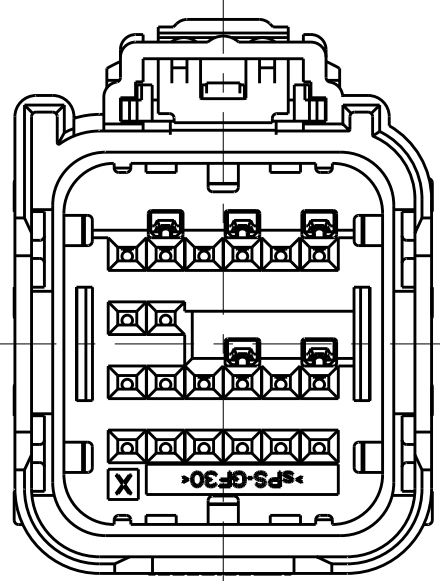


OPTION "A"

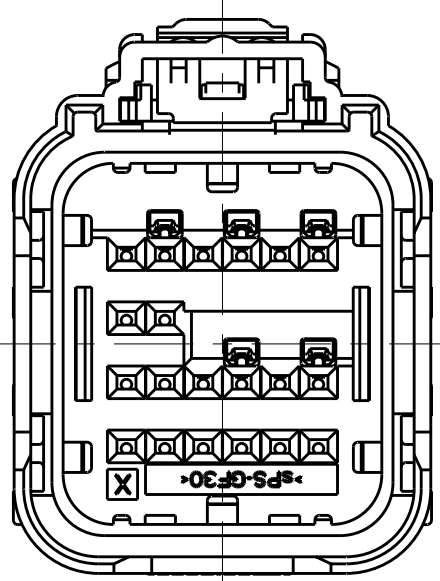


OPTION "B"

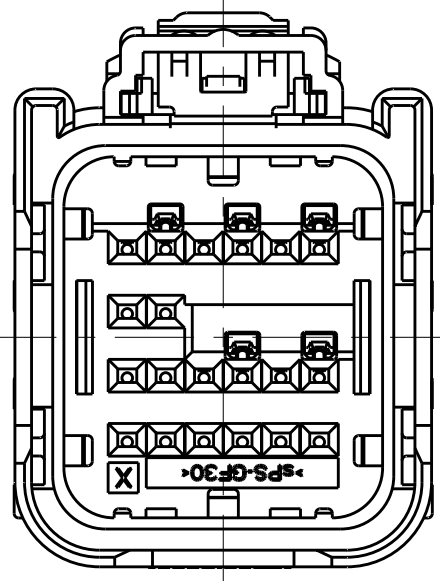


OPTION "C"

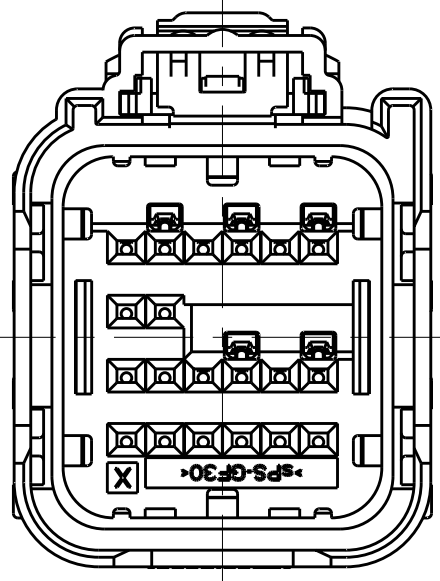



OPTION "D"

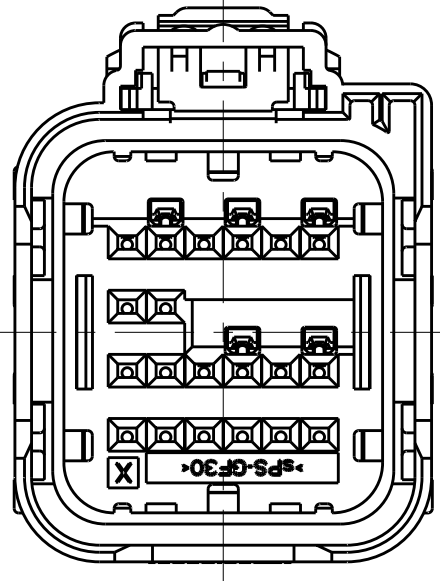

OPTION "E"

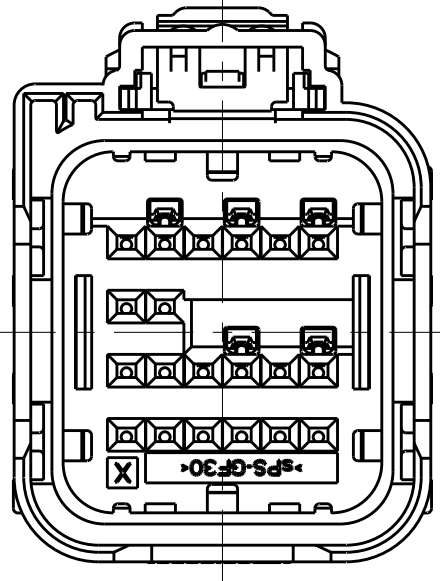



OPTION "F"

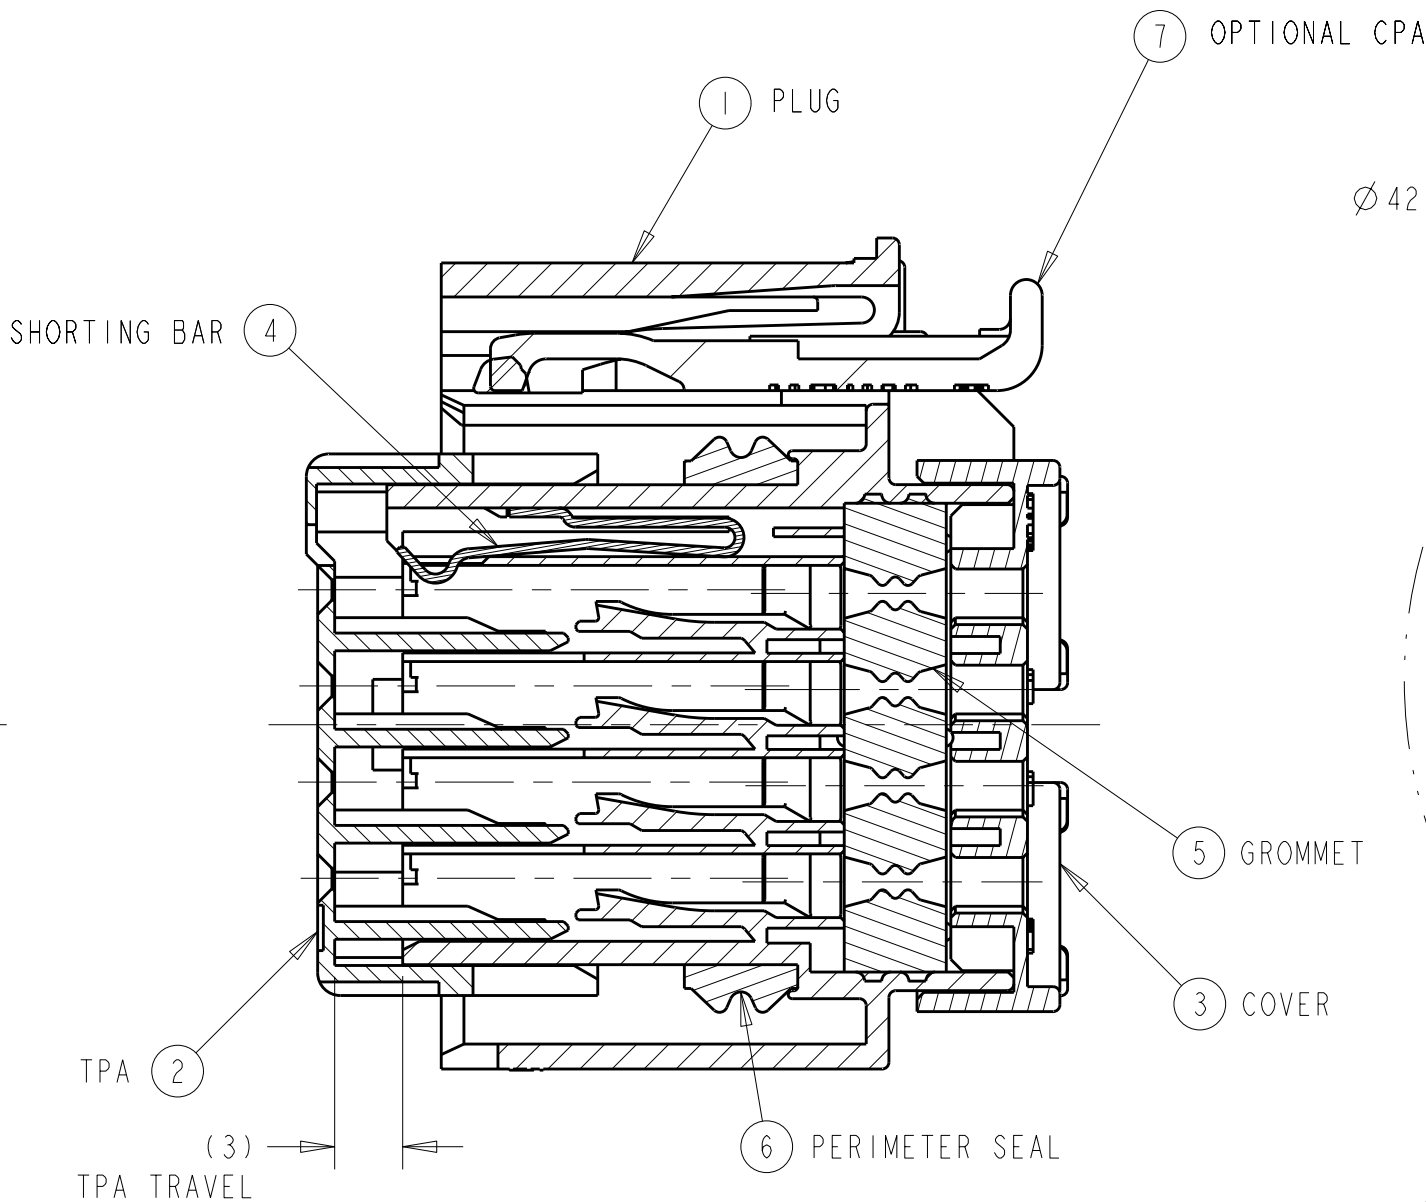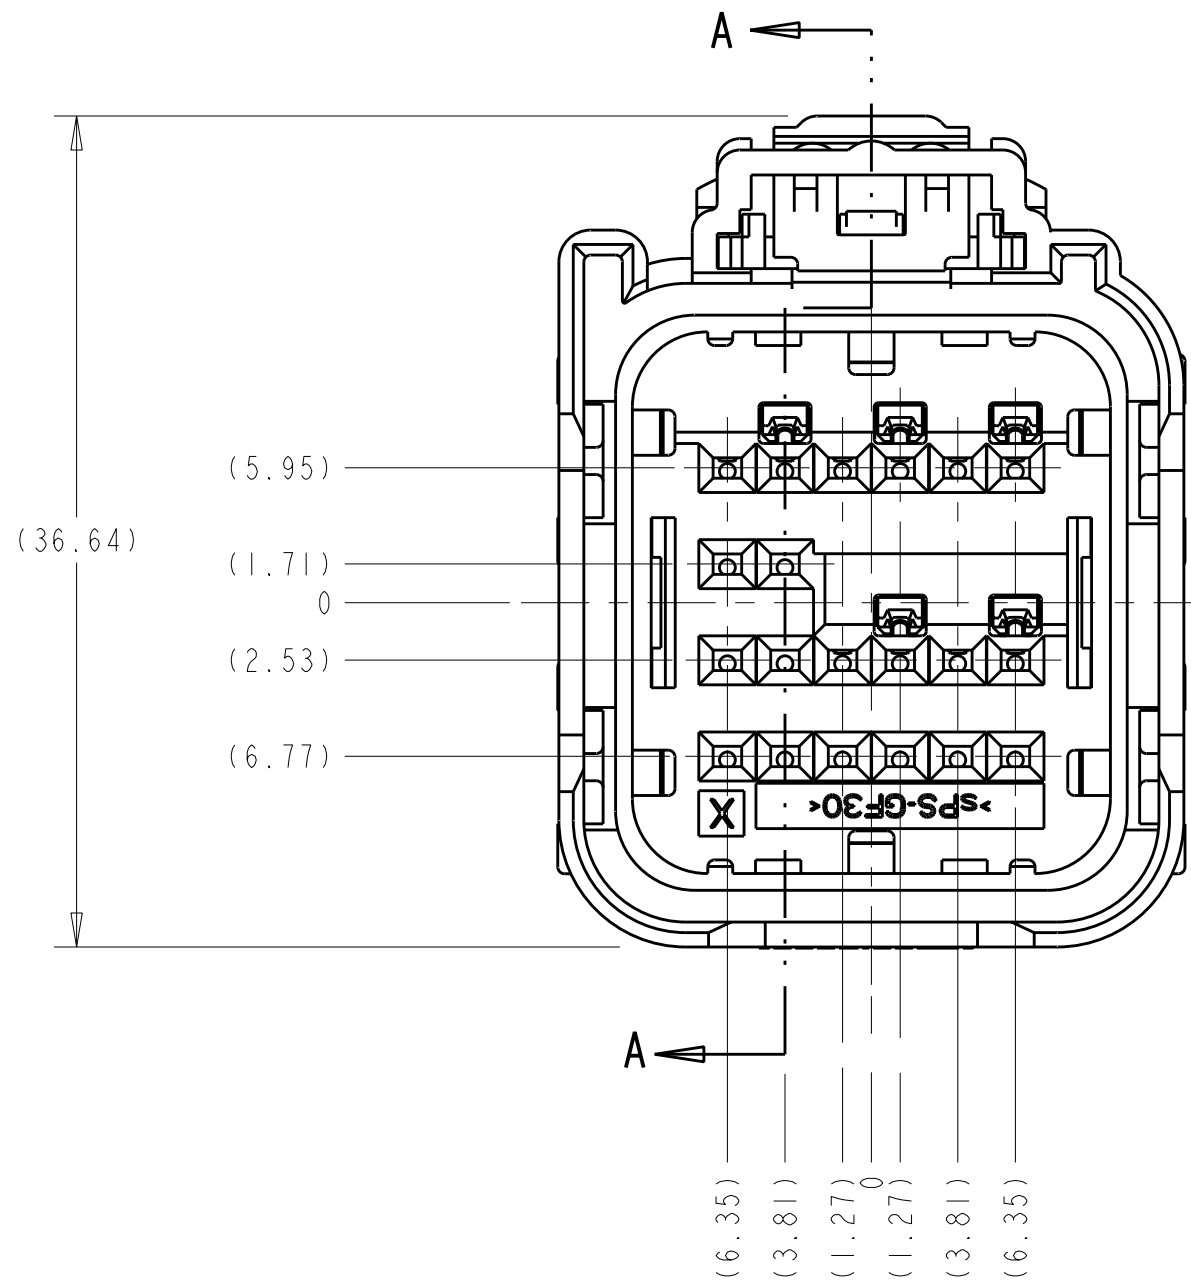


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

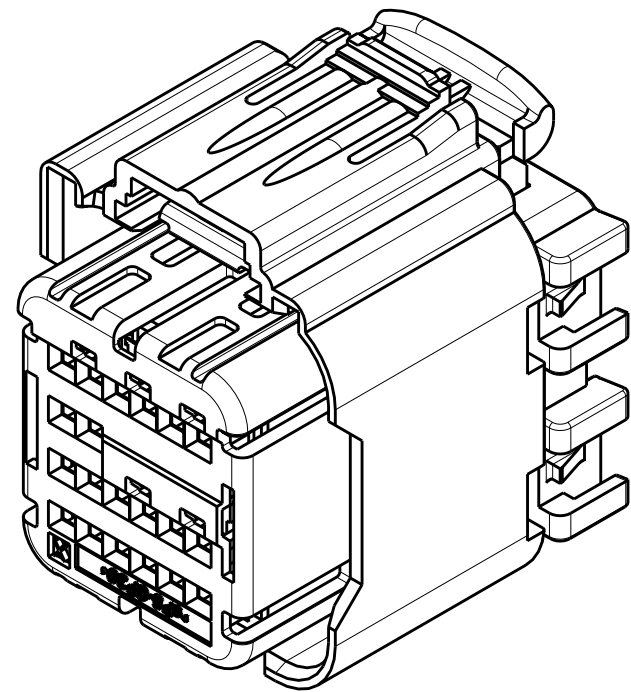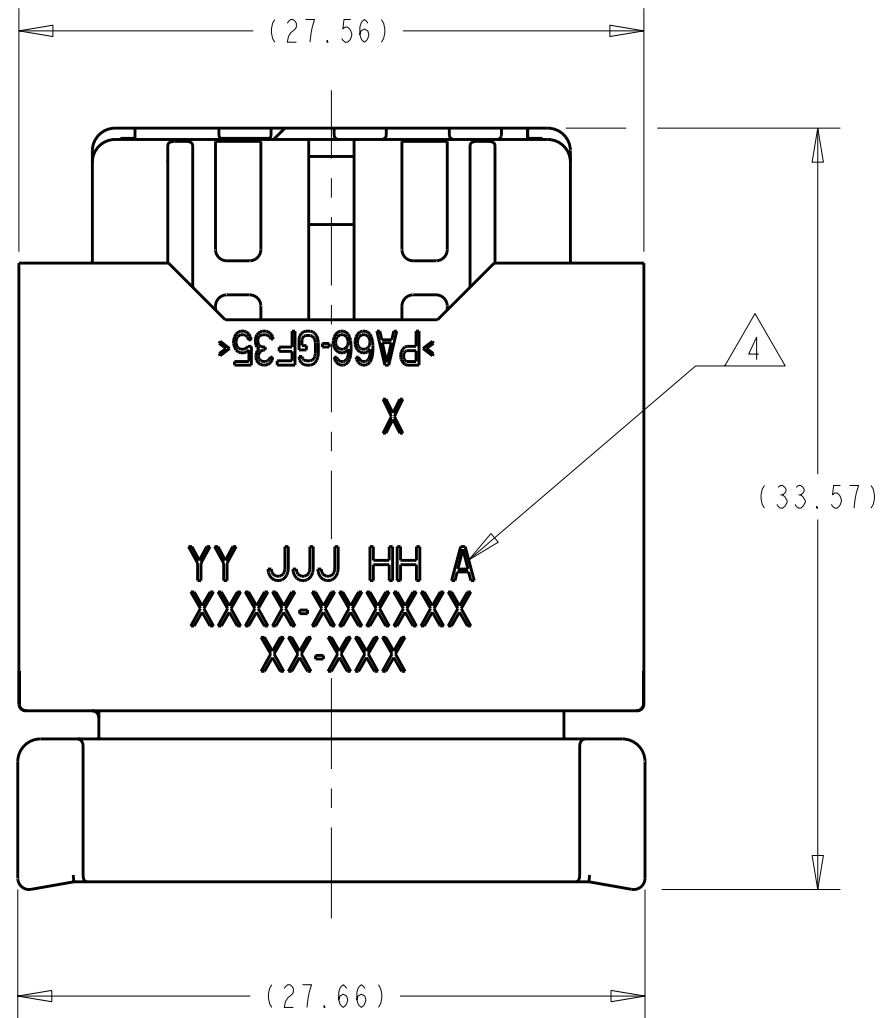

SCALE 2:1

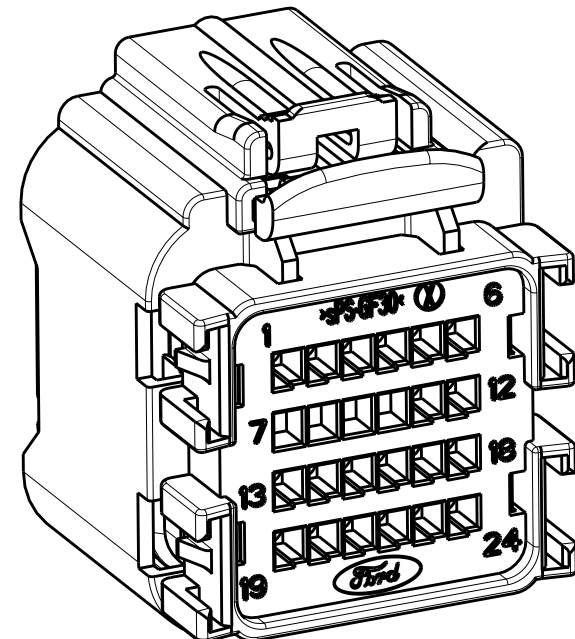

SCALE 2:1

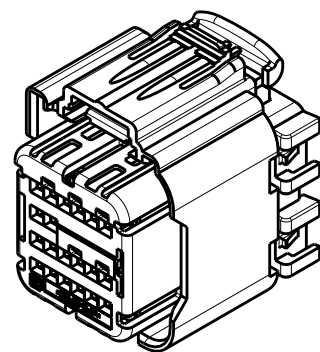

SCALE 1:1

KEYING OPTION "A" SHOWN

										SCALE 1:1			
KEYING OPTION "A" SHOWN													

[illegible]AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1924672-9](#)