




Bestückungsplan / contact layout



■ bestückt / assemble

Leiterplatten-Lochbild / PCB drillhole pattern

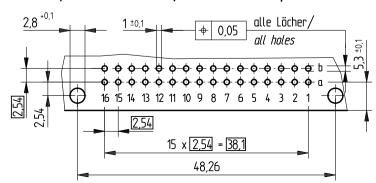



Tauchlötaschluß 0,3 x 0,7 mm / solder terminal 0,3 x 0,7 mm Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
Fehlende Maße und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions according to IEC 60 603-2

Bedruckung siehe Zeichnung 294875 Marking see drawing 294875

nsider protection memo from DIN 34	Information:			Tolerances	All Dimensions in mm	Scale 2:1	
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Federleiste Q/2, 32 Löt Fem. Con. Q/2, 32 Solder	
				ERMI www.E	RNI.com	294722	
ပိ	Index	Date		V:00064675.	.SZA	STVQ/2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ERNI Electronics:

294722