
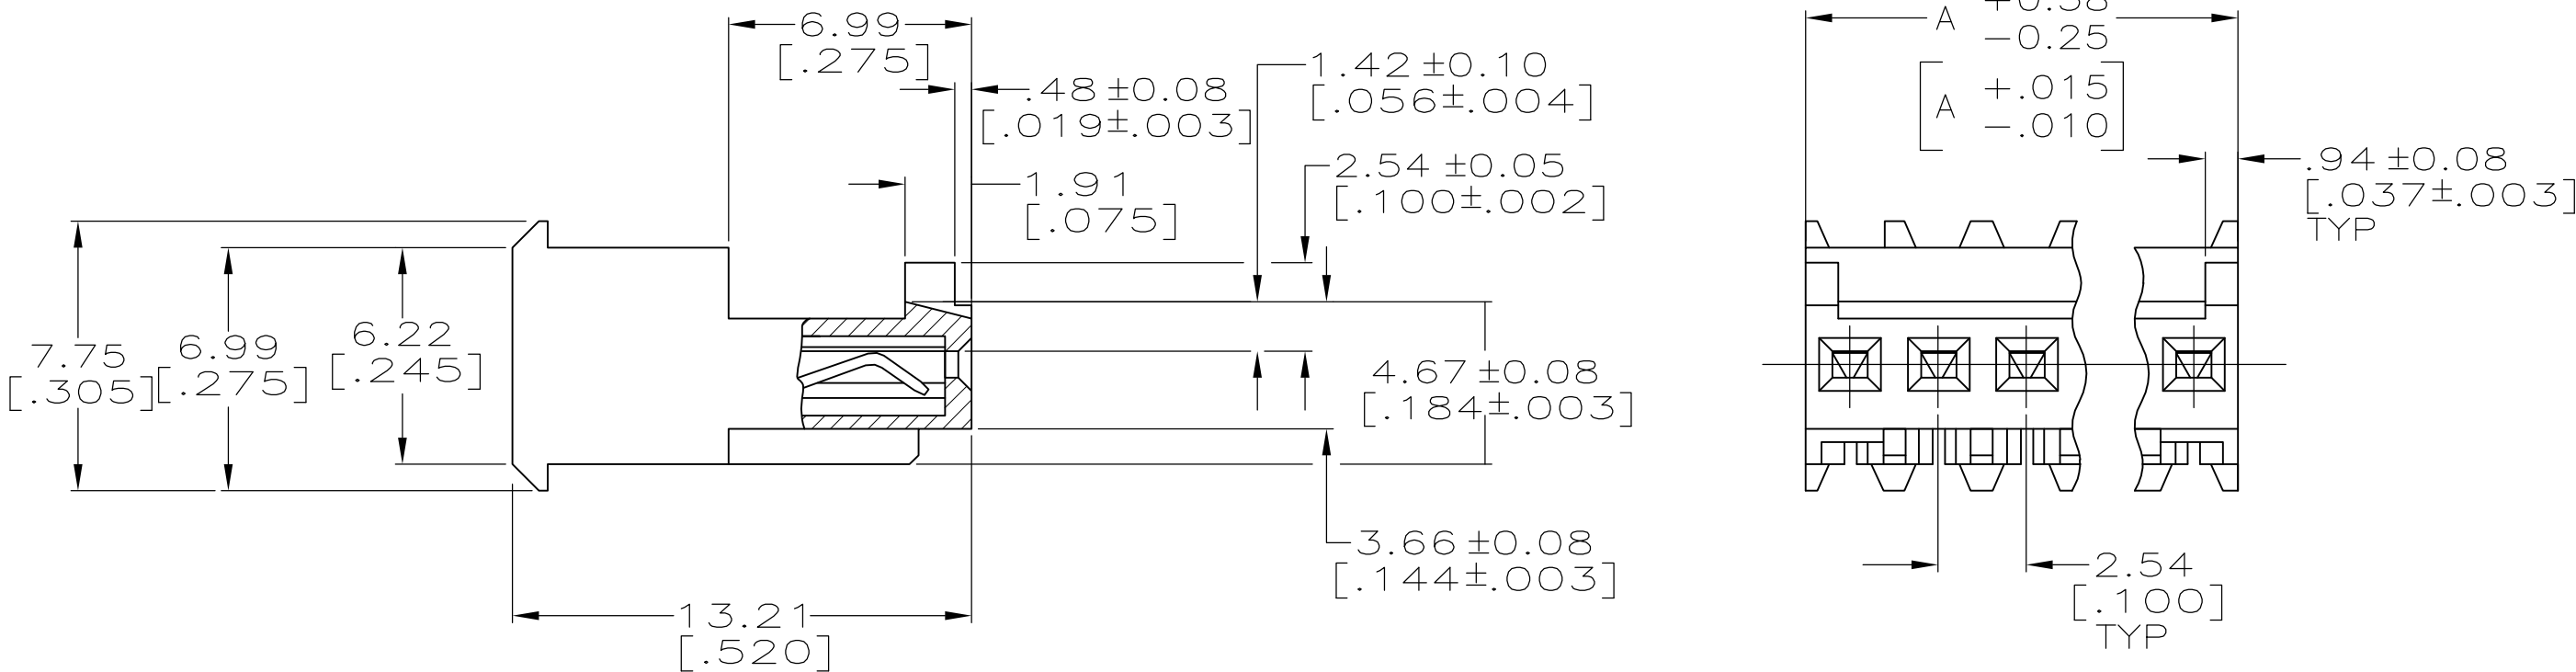


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			E1	ECO-14-010907	25AUG2014	KR	OC

NO	38.10[1.500]	15	1-644540-5	SUPERSEDED BY 4-644540-5	7
NO	35.56[1.400]	14	1-644540-4		
NO	33.02[1.300]	13	1-644540-3	SUPERSEDED BY 4-644540-3	7
NO	30.48[1.200]	12	1-644540-2		
NO	27.94[1.100]	11	1-644540-1		
NO	25.40[1.000]	10	1-644540-0	SUPERSEDED BY 4-644540-0	7
NO	22.86[.900]	9	644540-9		
NO	20.32[.800]	8	644540-8		
NO	17.78[.700]	7	644540-7		
NO	15.24[.600]	6	644540-6		
NO	12.70[.500]	5	644540-5		
NO	10.16[.400]	4	644540-4		
NO	7.62[.300]	3	644540-3		
NO	5.08[.200]	2	644540-2		
LEADFREE	DIM A	NO. OF CIRCUITS	PART NO.		

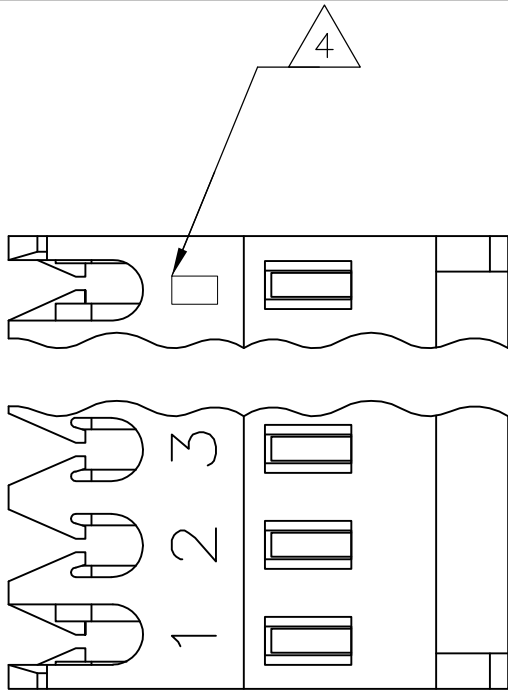

- 1 MATERIAL: CONNECTOR — NYLON UL94V-2 (RED).
CONTACTS — 0.30[.012] THICK COPPER ALLOY
BRIGHT TIN-LEAD .00203[.000080] MIN THICKNESS
FOR 644540-2 THRU 2-644540-8.
MATTE WHISKER MITIGATED TIN .00203[.000080] MIN THICKNESS OVER
NICKEL UNDERPLATE FOR 3-644540-2 THRU 4-644540-5.

2 CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX
INSULATION DIAMETER.


3 CONTACTS MUST ACCEPT 0.64 ± 0.03 [.025 $\pm$.001] SQUARE
POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.

5 DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSING FEATURES ARE: FEED THRU WITH
LOCKING RAMP AND WITH POLARIZING TAB.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12JUN2003 S. CARPENTER CHK 12JUN2003 D. BOSSI APVD 12JUN2003 D. BOSSI PRODUCT SPEC 108-1050 APPLICATION SPEC 114-1019		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ±		SIZE A2	
MATERIAL 		FINISH 		CAGE CODE 00779	
		WEIGHT		DRAWING NO C-644540	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 5:1	
				SHEET 1 of 1	
				REV E1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[644540-7](#)