

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0025022046

Status:


Active

Overview:

C-Grid Connector Products

Description:

2.54mm Pitch C-Grid Header, Dual Row, Shrouded, with PC Slot and Guide Ear, 46 Circuits, Tin (Sn) Plating

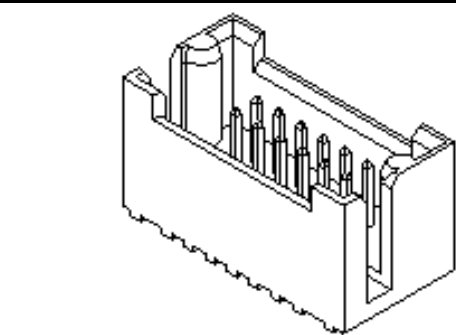

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70204-001 (PDF)

Packaging Specification PK-70873-0070-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	70204
Application	Board-to-Board, Signal
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	800753986626
Physical	
Breakaway	No
Circuits (Loaded)	46
Circuits (maximum)	46
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Plating Mating	Tin
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Engineering Number	A-70204-0406
Reference - Drawing Numbers	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Not Reviewed	
REACH SVHC	
Not Reviewed	
Halogen-Free	
Status	
Not Reviewed	
For more information, please visit Contact US	
China ROHS	Not Reviewed
ELV	Not Relevant
RoHS Phthalates	Not Reviewed

Search Parts in this Series

70204 Series

Mates With

71973

Packaging Specification
Product Specification
Sales Drawing

PK-70873-0070-001
PS-70204-001
SDA-70204-0385-0448

This document was generated on 03/28/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[25-02-2046](#)