
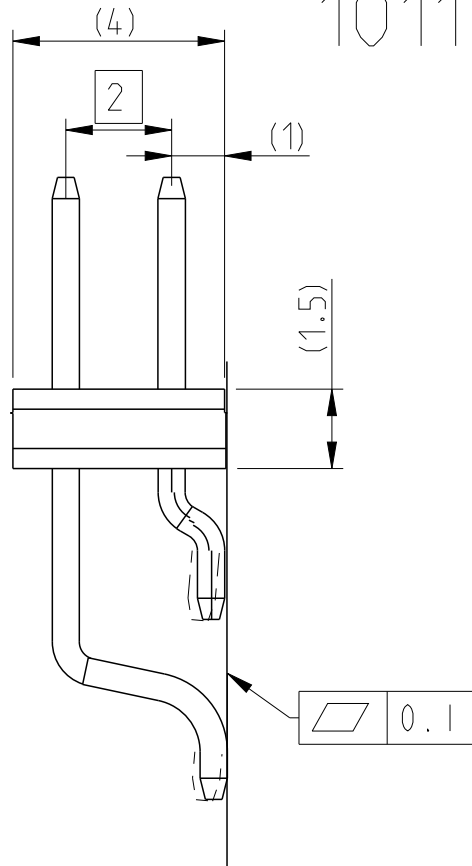


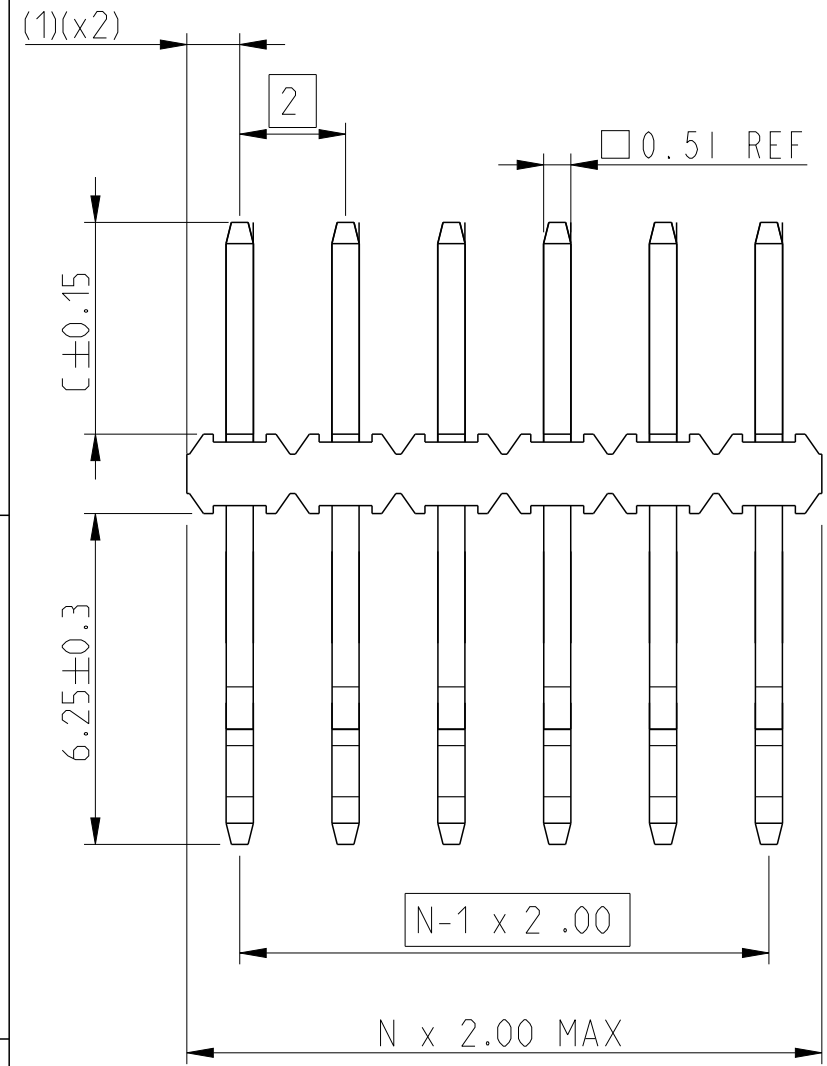

10112690 - X XX-YY Z LF

INDICATES THAT PRODUCT IS RoHS COMPATIBLE SEE NOTE 3

PACKAGING :

A = Tape and reel with Pick-up cap
See GS-14-1516 As available
U = Tube without Pick-up cap.
See GS-14-1551

NBR CONTACTS PER ROW : 02 TO 25 = N

V = CUSTOMER SPECIAL
- = ALL GLOBAL CUSTOMERS

NOT TOOLED

STYLE	01	02	03	04	05	06
DIM C POST LENGTH	3.2	2.0	4.0	7.0	5.84	4.82

PLATING : G= 0.76µ Gold/GXT on mating area
2-6µ Pure Tin on solder area
F= Gold flash on mating area
2-6µ pure Tin on solder area
T= 2-6µ pure Tin on mating area
2-6µ pure Tin on solder area
All with 1.27 Ni underplating

NOTES :




1- MATERIALS :
BODY : High Temp thermoplastic 30% GF, COLOR BLACK UL94 V-0
PIN : COPPER ALLOY

2- 7N MIN PIN RETENTION IN EITHER DIRECTION

3- RoHS COMPATIBLE PRODUCT SPECIFICATION :
a- PLATING : LF means the product is Lead Free,
2µ MIN matte Tin over 1.27µ Nickel underplating.
b- MANUFACTURING PRODUCT SPECIFICATION :
Housing will withstand exposure to 260°C peak temperature
for 30 secondes in a convection infra-red or vapor phase oven.

c- LABELLING :
Meets packaging specs as per GS-14-920
d- LEGAL STATMENT : See GS-47-0004

4- MINIMUM QUANTITY IN BLI BOX : 500

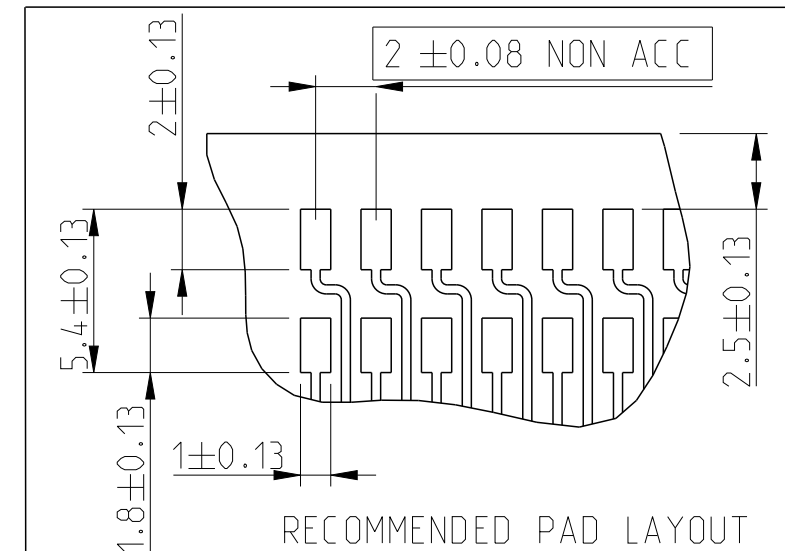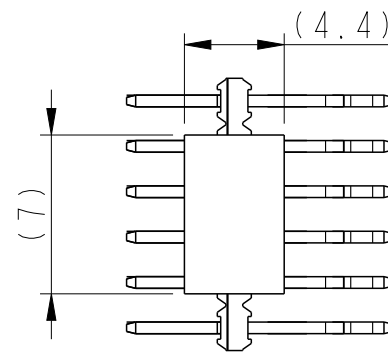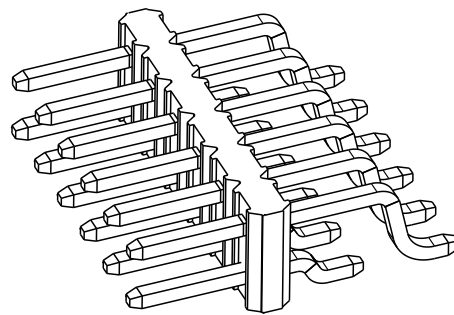

spec ref		GS-12-652			dr	Alexandre Parr	2014/02/28	projection		mm		size	A3	scale	4:1									
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Detouillon, Da	2023/12/21					ecn no	ELX-F-48171-1											
					chr	-	-																	
ISO 406					appr	Lamy, Alexandr	2023/12/21		product family				rel level	Released										
ISO 1101					surface	linear	0.X	±0.30	Amphenol FCi	title				HEADER UNSHROUDED SMT				dwg no	10112690C				rev	J
0.XX	±0.13																							
0.XXX	±0.05																							
ISO 1302					angular	0°	±/°	www.fci.com	cat. no.	-	Product - Customer Drw				sheet 1 of 1									