
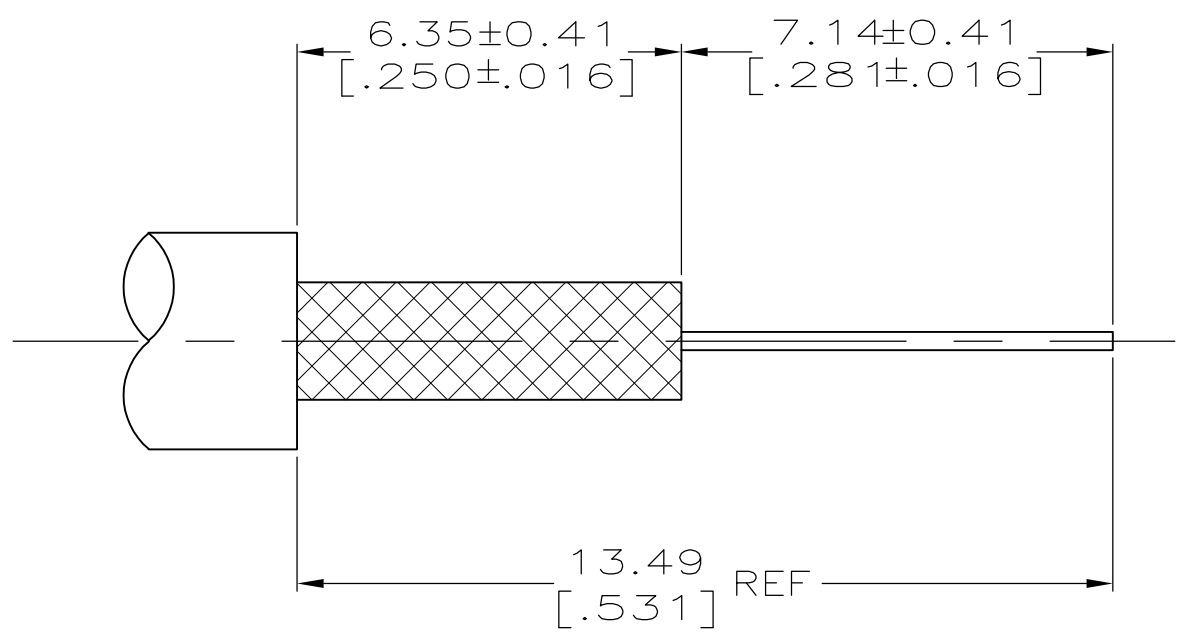




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AJ	16		BL1	REVISED PER ECO-11-005030	11MAR11	RK HMR

1. SEE IS 1770
2. BRASS PER QQ-B-626
3. NYLON PER ASTM-D-4066, NATURAL.
4. POLYMETHYLPENTENE GENERAL PURPOSE.
5. .000030 MINIMUM GOLD PER MIL-G-45204.
6. .000100 MINIMUM GOLD PER MIL-G-45204.

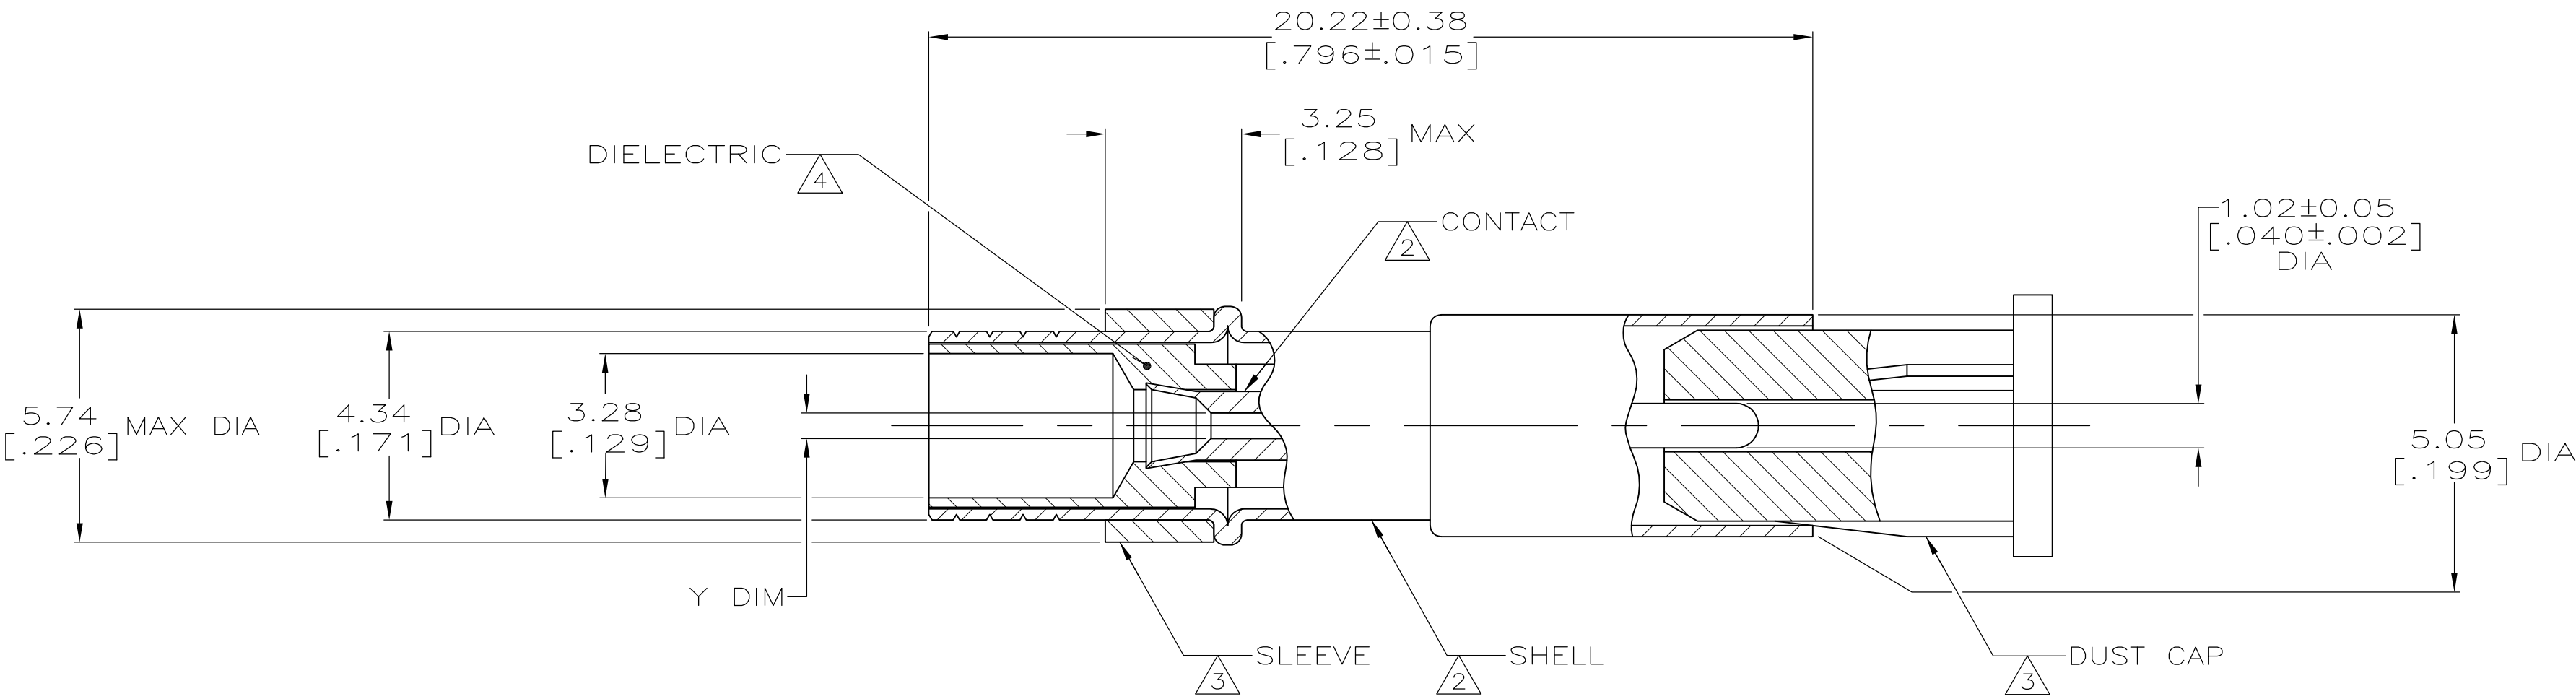

RECOMMENDED STRIP LENGTH

OBSOLETE	5	6	.042±.003	1-201146-0
	6	6	.042±.003	201146-9
	5	5	.023±.003	201146-6
	5	5	.042±.003	201146-4
SUPERSEDED BY 201146-2	5	5	.023±.003	201146-2
	5	5	.042±.003	201146-1

		CONTACT PLATING		SHELL PLATING		"Y" DIM		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN B. WERNER 8-9-94		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		CHK J. McLEOD 8-9-94					
				NAME					
		APVD J. McLEOD 8-9-94		SOCKET. MINIATURE SERIES					
		PRODUCT SPEC							
		APPLICATION SPEC		RESTRICTED TO					
		WEIGHT							
MATERIAL		FINISH		SIZE		CAGE CODE		DRAWING NO	
1 2 3 4		5 6		A1		00779		C=201146	
CUSTOMER DRAWING						SCALE		8:1	
						SHEET		1 OF 1	
						REV		BL1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[201146-9](#)