


# ALUMINUM ELECTROLYTIC CAPACITORS

# UCB

Chip Type, Long Life Assurance




- Chip type with load life of 7000 hours at +105°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.





## Specifications

Item	Performance Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	6.3 to 50V						
Rated Capacitance Range	1 to 1000μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.03 CV or 4 (μA) , whichever is greater.						
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C						
	Rated voltage (V)	6.3	10	16	25	35	50
	tan δ (MAX.)	0.32	0.28	0.26	0.16	0.14	0.14
Stability at Low Temperature	Measurement frequency : 120Hz						
	Rated voltage (V)	6.3	10	16	25	35	50
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	4	3	2	2	2
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 7000 hours at 105°C.		Capacitance change		Within ±30% of the initial capacitance value		
			tan δ		300% or less than the initial specified value		
			Leakage current		Less than or equal to the initial specified value		
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.						
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		Capacitance change		Within ±10% of the initial capacitance value		
			tan δ		Less than or equal to the initial specified value		
			Leakage current		Less than or equal to the initial specified value		
Marking	Black print on the case top.						

## Chip Type

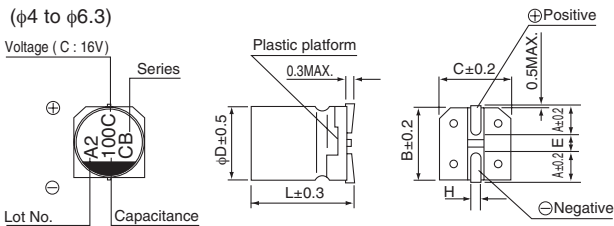

## Type numbering system (Example : 16V 100μF)

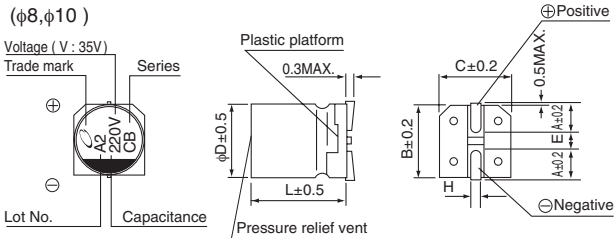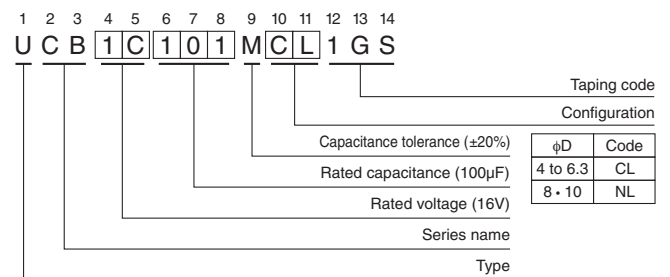

φD × L	(mm)					
	4 × 7	5 × 7	6.3 × 7	6.3 × 8.7	8 × 10	10 × 10
A	1.8	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	7.0	7.0	7.0	8.7	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

## Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

● Dimension table in next page.

## UCB

### ■ Dimensions

Cap.(μF)	Code	V		6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H			
1	010											4 × 7	6.2		
2.2	2R2											4 × 7	11		
3.3	3R3											4 × 7	14		
4.7	4R7											4 × 7	15		
10	100							4 × 7	18			5 × 7	25		
22	220	4 × 7	22					5 × 7	30			6.3 × 7	42		
33	330			5 × 7	35					6.3 × 7	48	6.3 × 8.7	57	8 × 10	77
47	470	5 × 7	36					6.3 × 7	50	6.3 × 8.7	63			8 × 10	92
100	101	6.3 × 7	60					6.3 × 8.7	81	8 × 10	116			10 × 10	151
220	221	6.3 × 8.7	101	8 × 10	141							10 × 10	216		
330	331	8 × 10	160												
470	471							10 × 10	254						
1000	102	10 × 10	313												

Rated ripple current (mArms) at 105°C 120Hz

### ● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[UCB1V2R2MCL1GS](#) [UCB1C101MCL1GS](#) [UCB1C220MCL1GS](#) [UCB1C470MCL1GS](#) [UCB1C471MNL1GS](#)  
[UCB1E101MNL1GS](#) [UCB1E330MCL1GS](#) [UCB1A330MCL1GS](#) [UCB1H101MNL1GS](#) [UCB1A221MNL1GS](#)  
[UCB1VR22MCL1GS](#) [UCB1VR33MCL1GS](#) [UCB1VR47MCL1GS](#) [UCB1V0R1MCL1GS](#) [UCB1V010MCL1GS](#)  
[UCB1E470MCL1GS](#) [UCB1C100MCL1GS](#) [UCB0J101MCL1GS](#) [UCB0J102MNL1GS](#) [UCB0J220MCL1GS](#)  
[UCB0J221MCL1GS](#) [UCB0J331MNL1GS](#) [UCB0J470MCL1GS](#) [UCB1V220MCL1GS](#) [UCB1V100MCL1GS](#)  
[UCB1V221MNL1GS](#) [UCB1V3R3MCL1GS](#) [UCB1V330MCL1GS](#) [UCB1V4R7MCL1GS](#) [UCB1H330MNL1GS](#)  
[UCB1H470MNL1GS](#)