



| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | A2  | REVISED PER ECR-16-011494 | 26JUN2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

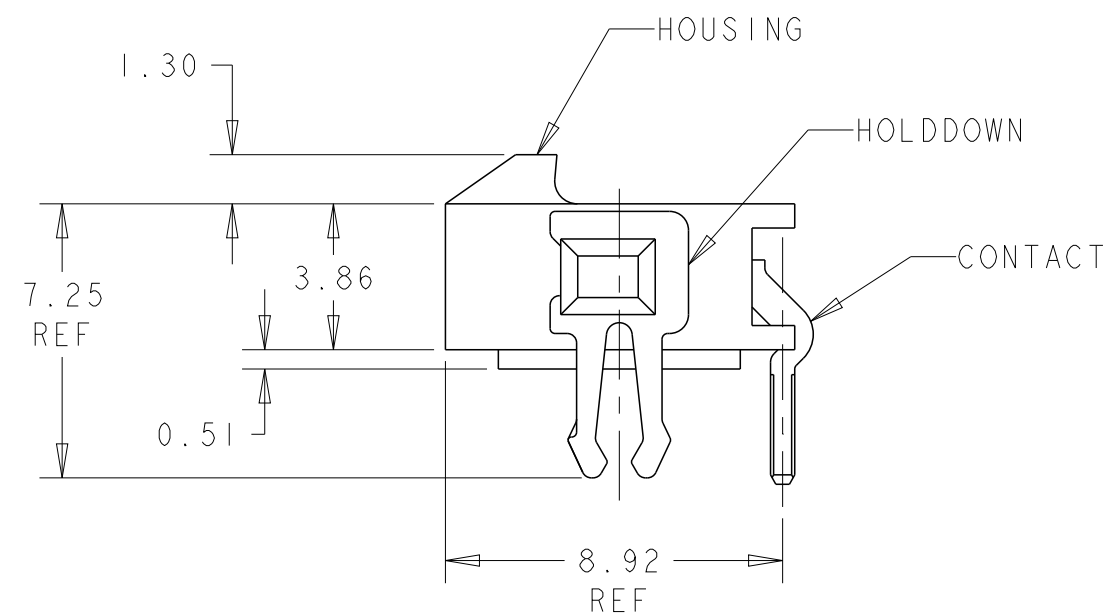

5 PLATING: CONTACTS - 0.38 $\mu$ m MINIMUM GOLD ON MATING END,  
2.54 $\mu$ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER  
1.27 $\mu$ m MINIMUM NICKEL.  
HOLD DOWNS: 2.54 $\mu$ m MINIMUM MATTE TIN OVER 1.27 $\mu$ m MINIMUM  
NICKEL.

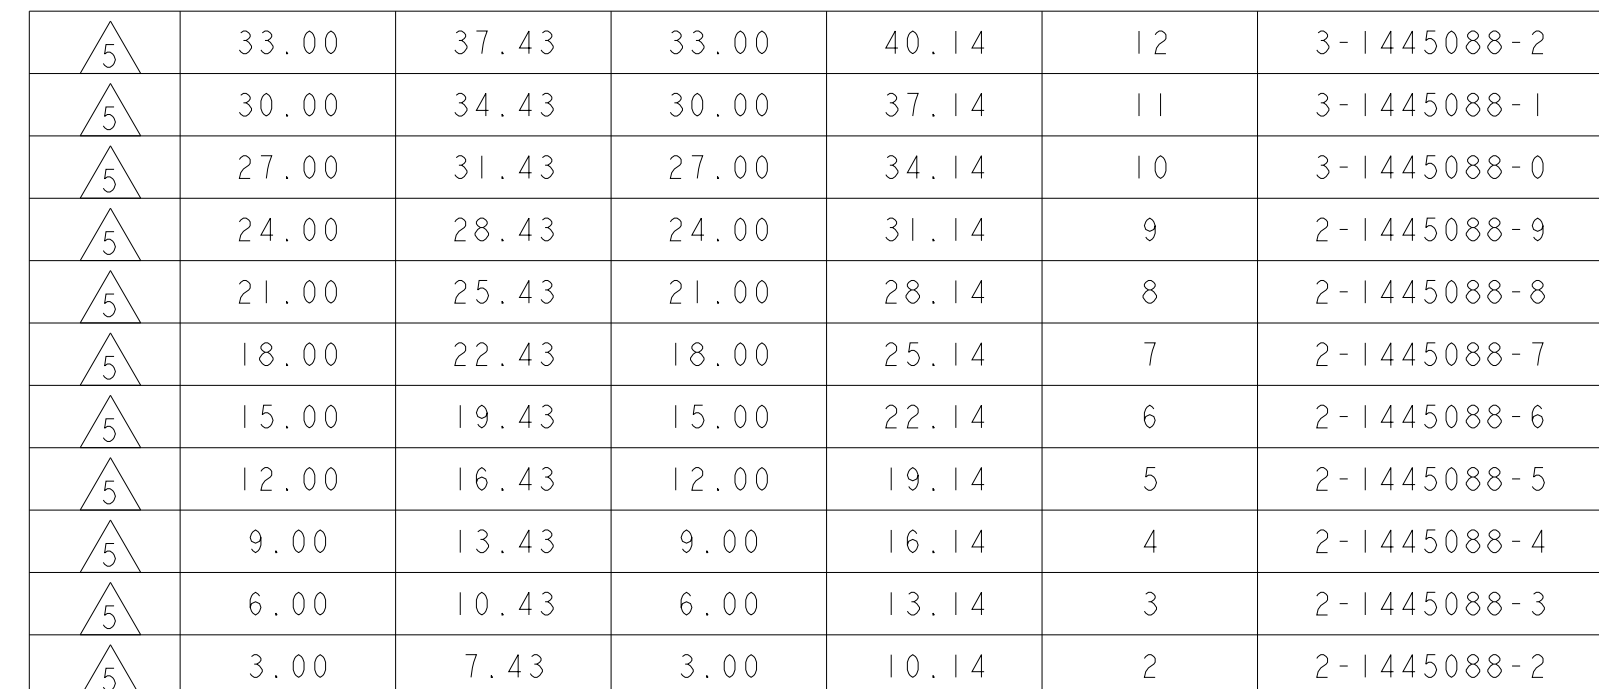

|                                                                                                   |  |                                                                                                               |  |                                                                                                                       |                    |
|---------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                            |  | DWN J.ROOT 09OCT2000<br>CHK K. WHITAKER 17-APR-2001<br>APVD C. JONES 17-APR-2001                              |  |  TE Connectivity                 |                    |
| DIMENSIONS:<br>mm                                                                                 |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ±<br>1 PLC ±<br>2 PLC ±0.13<br>3 PLC ±<br>4 PLC ±<br>ANGLES ± |  | NAME<br>RT ANG THRU HOLE HEADER ASSY,<br>0.38 MIC GOLD CONTACTS W/THRU HOLE,<br>HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™ |                    |
|              |  | PRODUCT SPEC<br>-<br>APPLICATION SPEC<br>-                                                                    |  |                                                                                                                       |                    |
| MATERIAL<br> |  | WEIGHT<br>-                                                                                                   |  | SIZE<br>A2                                                                                                            | CAGE CODE<br>00779 |
| SEE TABLE                                                                                         |  | CUSTOMER DRAWING                                                                                              |  | DRAWING NO<br>C-1445088                                                                                               | RESTRICTED TO<br>- |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1445088-1](#)