
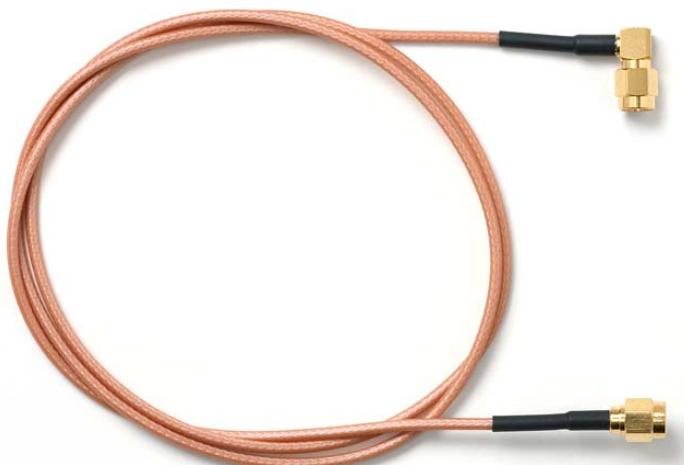


Model 73069
SMA Plug to SMA Right-Angle Plug, RG316/U

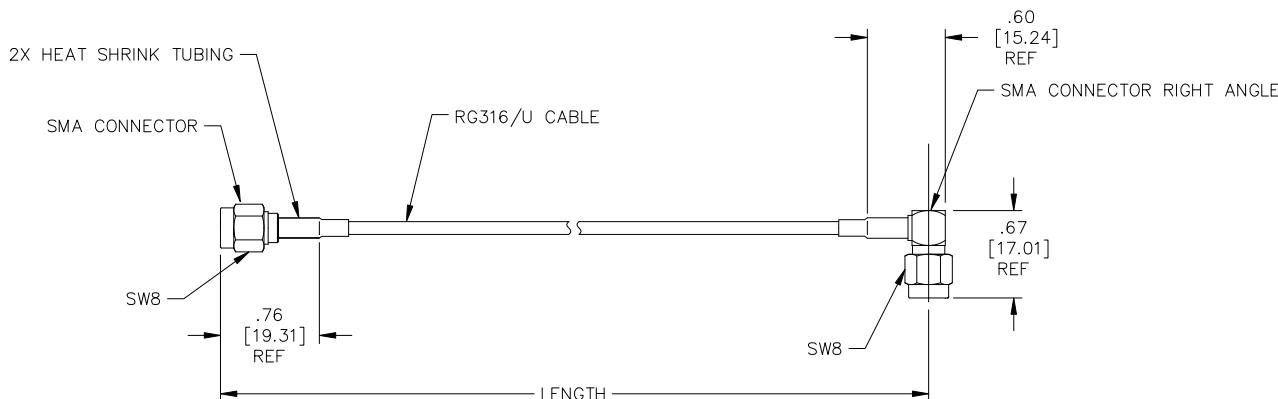

Model 73069
SMA Plug to SMA Right-Angle Plug, RG316/U

Small size, and durability for
confident connections

Features

- DC - 4GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connections are required.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

Materials

SMA Male Connectors:

Center Contact: Brass, Gold Plated

Connector Body: Brass, Gold Plated

Crimp Ferrule: Copper, Nickel Plated

Insulators: PTFE

Specifications

Cable Type	RG316/U
Impedance	50Ω
Frequency Range	DC - 4GHz
Insulation Resistance	≥ 500 MΩ
Insulator Withstand	750V
Temperature Range	-65° C to +165° C (-85°F to +329°F)
Jacket	FEP
Cable O.D.	0.098" (2.5mm)
Center Conductor (mm)	7 x .18 silver coated copper covered steel

Ordering Information

Model: **73069**

Cable Designator: **BB** = RG316/U

Standard Lengths: **12", 24", 36", 48", 60"**

- 12" ± .157" (305mm ± 4mm)
- 24" ± .275" (610mm ± 7mm)
- 36" ± .394" (914mm ± 10mm)
- 48" ± .512" (1219mm ± 13mm)
- 60" ± .630" (1524mm ± 16mm)

Ordering Example: **73069-BB-48**, Cable is RG316/U
with length of 48" (1219mm)

All dimensions are in inches. Tolerances (except noted): xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[73069-BB-36](#) [73069-BB-24](#) [73069-BB-60](#) [73069-BB-48](#) [73069-BB-12](#)