
aterial :	High Conductivity Seamless Copper Tube		
ating	Electro-Tin		
'ire Size	1/0 AWG		
j.	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
ire Strip Length	1.0 in.	.52±.04 BANDUIT	
ud Size	1/4 in.		
onnector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.32±.0463±.02	.2
Temperature ating	90°C	2.59±.	o6 ——
S.A Certified 'ire Connector	Yes		
anduit Color Code n Barrel	PINK		
anduit Die Index No. n Barrel	P42		
asting S.A Certified Tire Connector anduit Color Code anduit Die Index No.	Yes PINK	Wire inspection win	






(12)



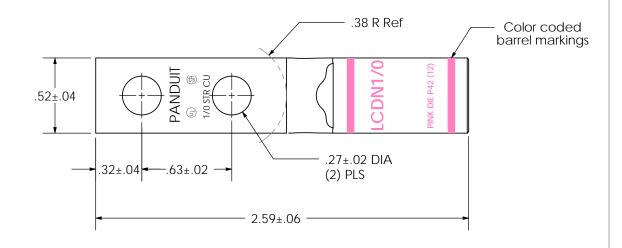

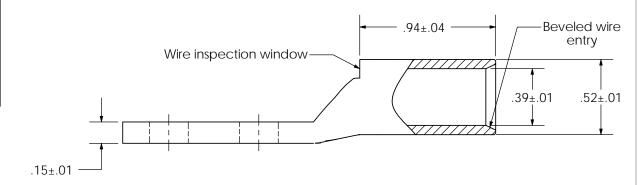

						PANDUIT CORP. TINLEY PARK, ILLINOIS
01	1/11	JHNU	JHNU	REVISED OVERALL LENGTH: WAS 2.57 REVISED TONGUE THICKNESS: WAS .13		LCDN1/0-14A-X Copper Lug - Narrow Tongue, Two-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCDN1_0-14A-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

LCDN1/0-14A-X