

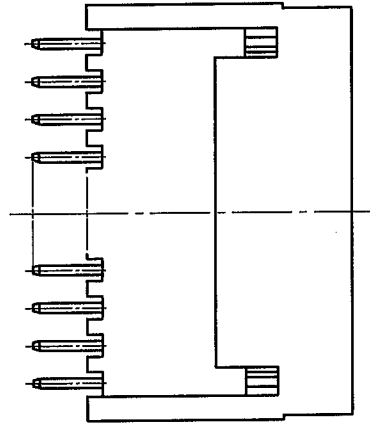
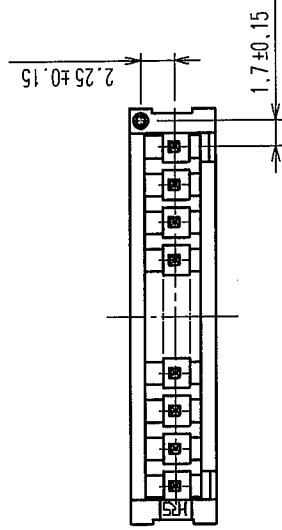
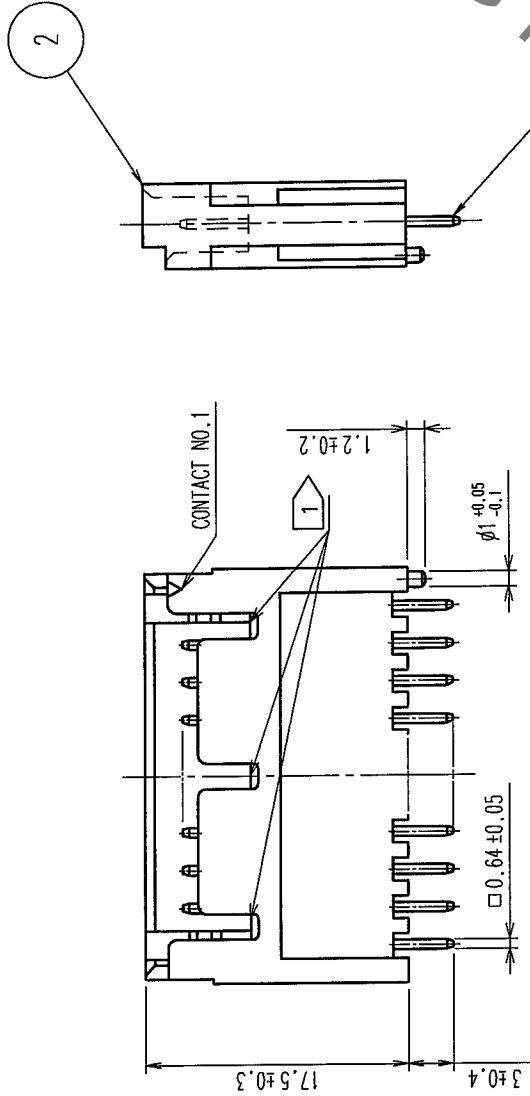


COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△							△					
△							△					
△							△					

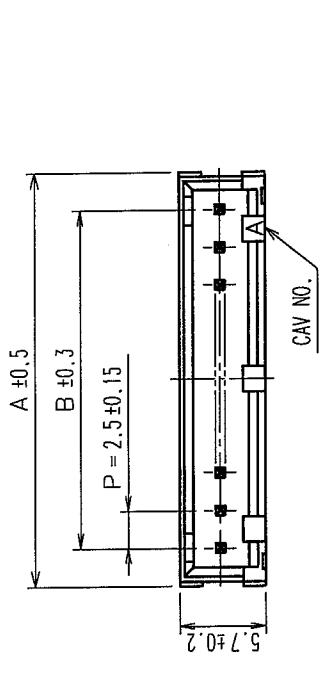

RECOMMENDED PATTERN(5:1)

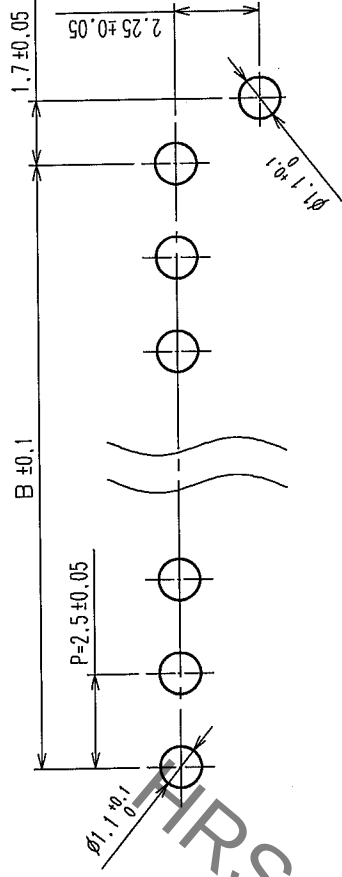

NUMBER OF CONTACT	PART NO.	CODE NO.	A	B
2	DF1BD- 2P-2.5DSA(05)	CL541-0800-3-05	7.5	2.5
3	DF1BD- 3P-2.5DSA(05)	CL541-0801-6-05	10.0	5.0
4	DF1BD- 4P-2.5DSA(05)	CL541-0802-9-05	12.5	7.5
5	DF1BD- 5P-2.5DSA(05)	CL541-0803-1-05	15.0	10.0
6	DF1BD- 6P-2.5DSA(05)	CL541-0804-4-05	17.5	12.5
7	DF1BD- 7P-2.5DSA(05)	CL541-0805-7-05	20.0	15.0
8	DF1BD- 8P-2.5DSA(05)	CL541-0806-0-05	22.5	17.5
9	DF1BD- 9P-2.5DSA(05)	CL541-0807-2-05	25.0	20.0
10	DF1BD-10P-2.5DSA(05)	CL541-0808-5-05	27.5	22.5

1	BRASS	SURFACE: TIN PLATED 1μ m min UNDER PLATING: NICKEL PLATED 0.5μ m min		2	POLYAMIDE	UL94V-0, NATURAL (WHITE)	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
		F. Matsuki '04.03.26	H. Uehara '04.03.26	T. Miyazaki '04.03.26	T. Oka '04.03.29		
DRAWING NO.		PART NO.					
EDC3-071913-01		DF1BD-*P-2.5DSA(05)					
SCALE		CODE NO.					
2 : 1							
UNITS							
mm							
HRS		HIROSE ELECTRIC CO., LTD		CL541-		1 / 1	

NOTES 1: 2 POSITIONS AND 3 POSITIONS HEADERS HAVE 1 POLARIZING SLOT AT CENTER.
TO 6 POSITIONS FROM 4 POSITIONS HAVE 2 POLARIZING SLOTS.
OTHER POSITIONS HAVE 3 POLARIZING SLOTS AS PER DRAWING.

TO

HRS

HIROSE ELECTRIC CO., LTD

CL541-

1/1