


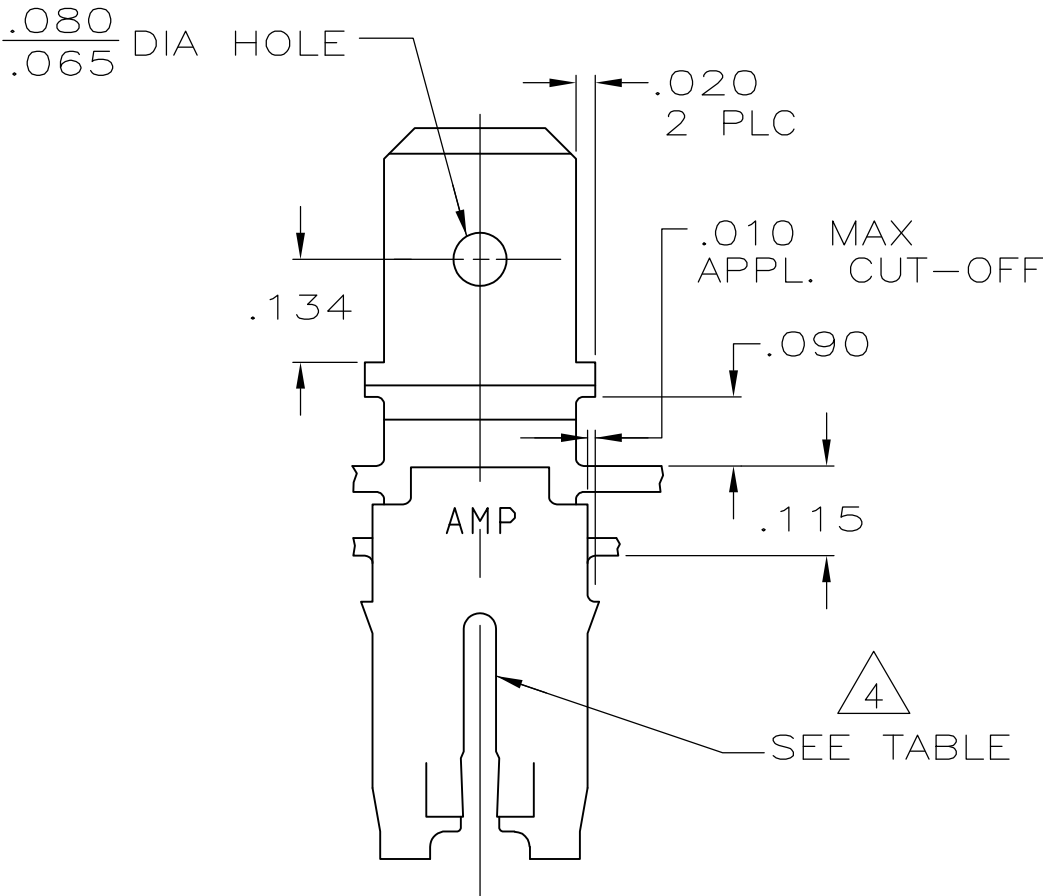


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50						
			H4	ECR-14-014331	25SEP14	PKS	RRP

IDENTIFICATION NUMBER
FOR MAGNET WIRE RANGE

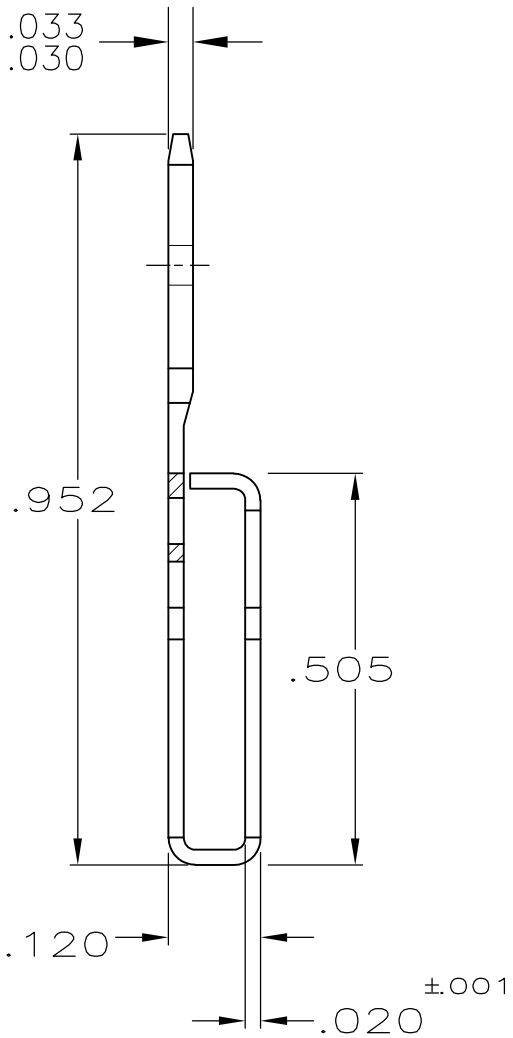

- 1
- FOR MAG-MATE CAVITY SPECIFICATION REFER TO APPLICATION SPEC #114-2066.
- 2
- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON .330 CENTERS.
- 3
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR MAG-MATE MUST BE POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4
- FOR COPPER OR ALUMINUM WIRE. 2 WIRES MAX OF THE SAME SIZE AND TYPE PER SLOT
- 5
- VARNISH RESIST OVER TIN PER ASTM-B545.
- 6
- COPPER MAGNET WIRE ONLY. 2 WIRES MAX OF THE SAME SIZE AND TYPE PER SLOT.
- 7
- PRELIMINARY - NOT FOR PRODUCTION.

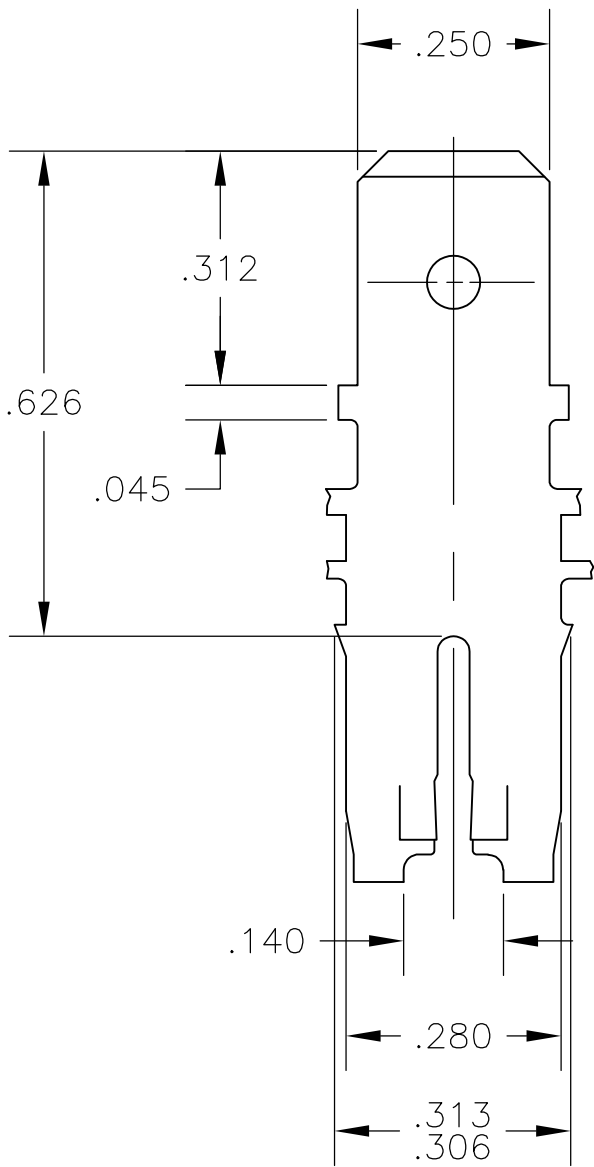

OBSOLETE	6 N/A	#15-#16	UNPLATED	7 63459-5
	#14-#15	#15-#16	SPECIAL	5 63459-4
	#14-#15	#15-#16	STANDARD	63459-3
	#14-#15	#15-#16	TIN	63459-2
OBSOLETE		#15-#16	VARNISH RESIST OVER TIN	63459-1
	ALUMINUM	COPPER		
	MAGNET WIRE RANGE		FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 1/26/87		TE Connectivity						
DIMENSIONS: INCHES		CHK G YETTER 1/29/87								
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± ±		APVD J SWARTZ 1/29/87		NAME TAB, .250 FASTON, MAG-MATE™ -					
			PRODUCT SPEC -							
			APPLICATION SPEC -							
			-							
MATERIAL	FINISH	WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-63459		RESTRICTED TO -		
BRASS		SEE TABLE		CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1	REV H4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[63459-3](#)