
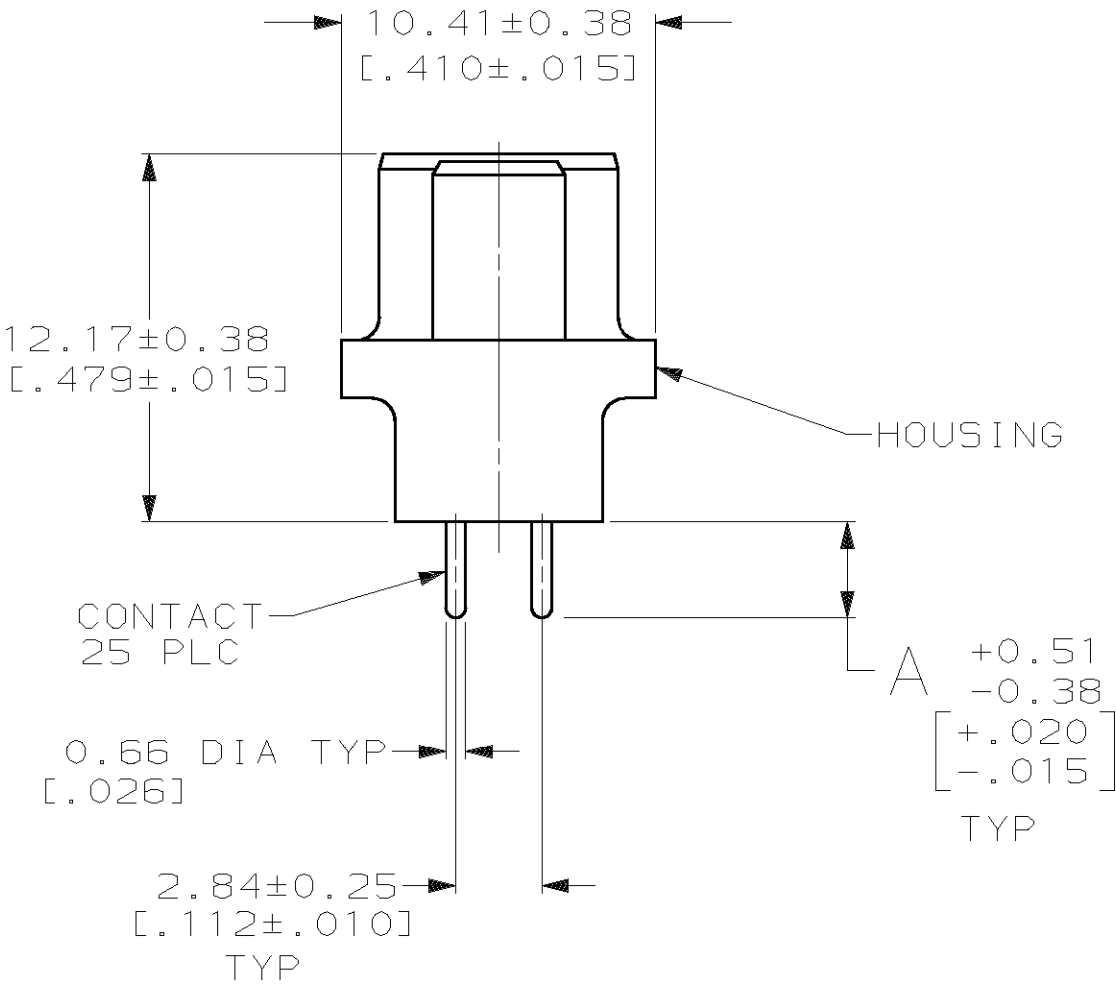


LOC	DIST	P	F	ZONE	LTR	REVISIONS		
						DESCRIPTION	DATE	APPD
BD	77				C	REDRAWN & REVISED, ECN BD3361	11-89	SS
					D	REV PER ECN BD4888	05/16/91	-
					E	OBSOLETE -8 EC 0020-625-93	09/15/93	CR
					F	OBS -7 AND REV PER	01 NOV 00	RF
						0U1D-0126-00		

- 1
- HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACTS: PHOSPHOR BRONZE PER QQ-B-750; SCREWLOCKS: BRASS PER QQ-B-626.
- 2
- GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290, COPPER PLATING PER MIL-C-14550.
- 3
- GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27μm[.000050] MIN NICKEL.
- 4
- 0.76μm[.000030] MIN GOLD FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27μm[.000050] MIN NICKEL.
- 5
- 1.27μm[.000050] MIN NICKEL OVER COPPER FLASH.

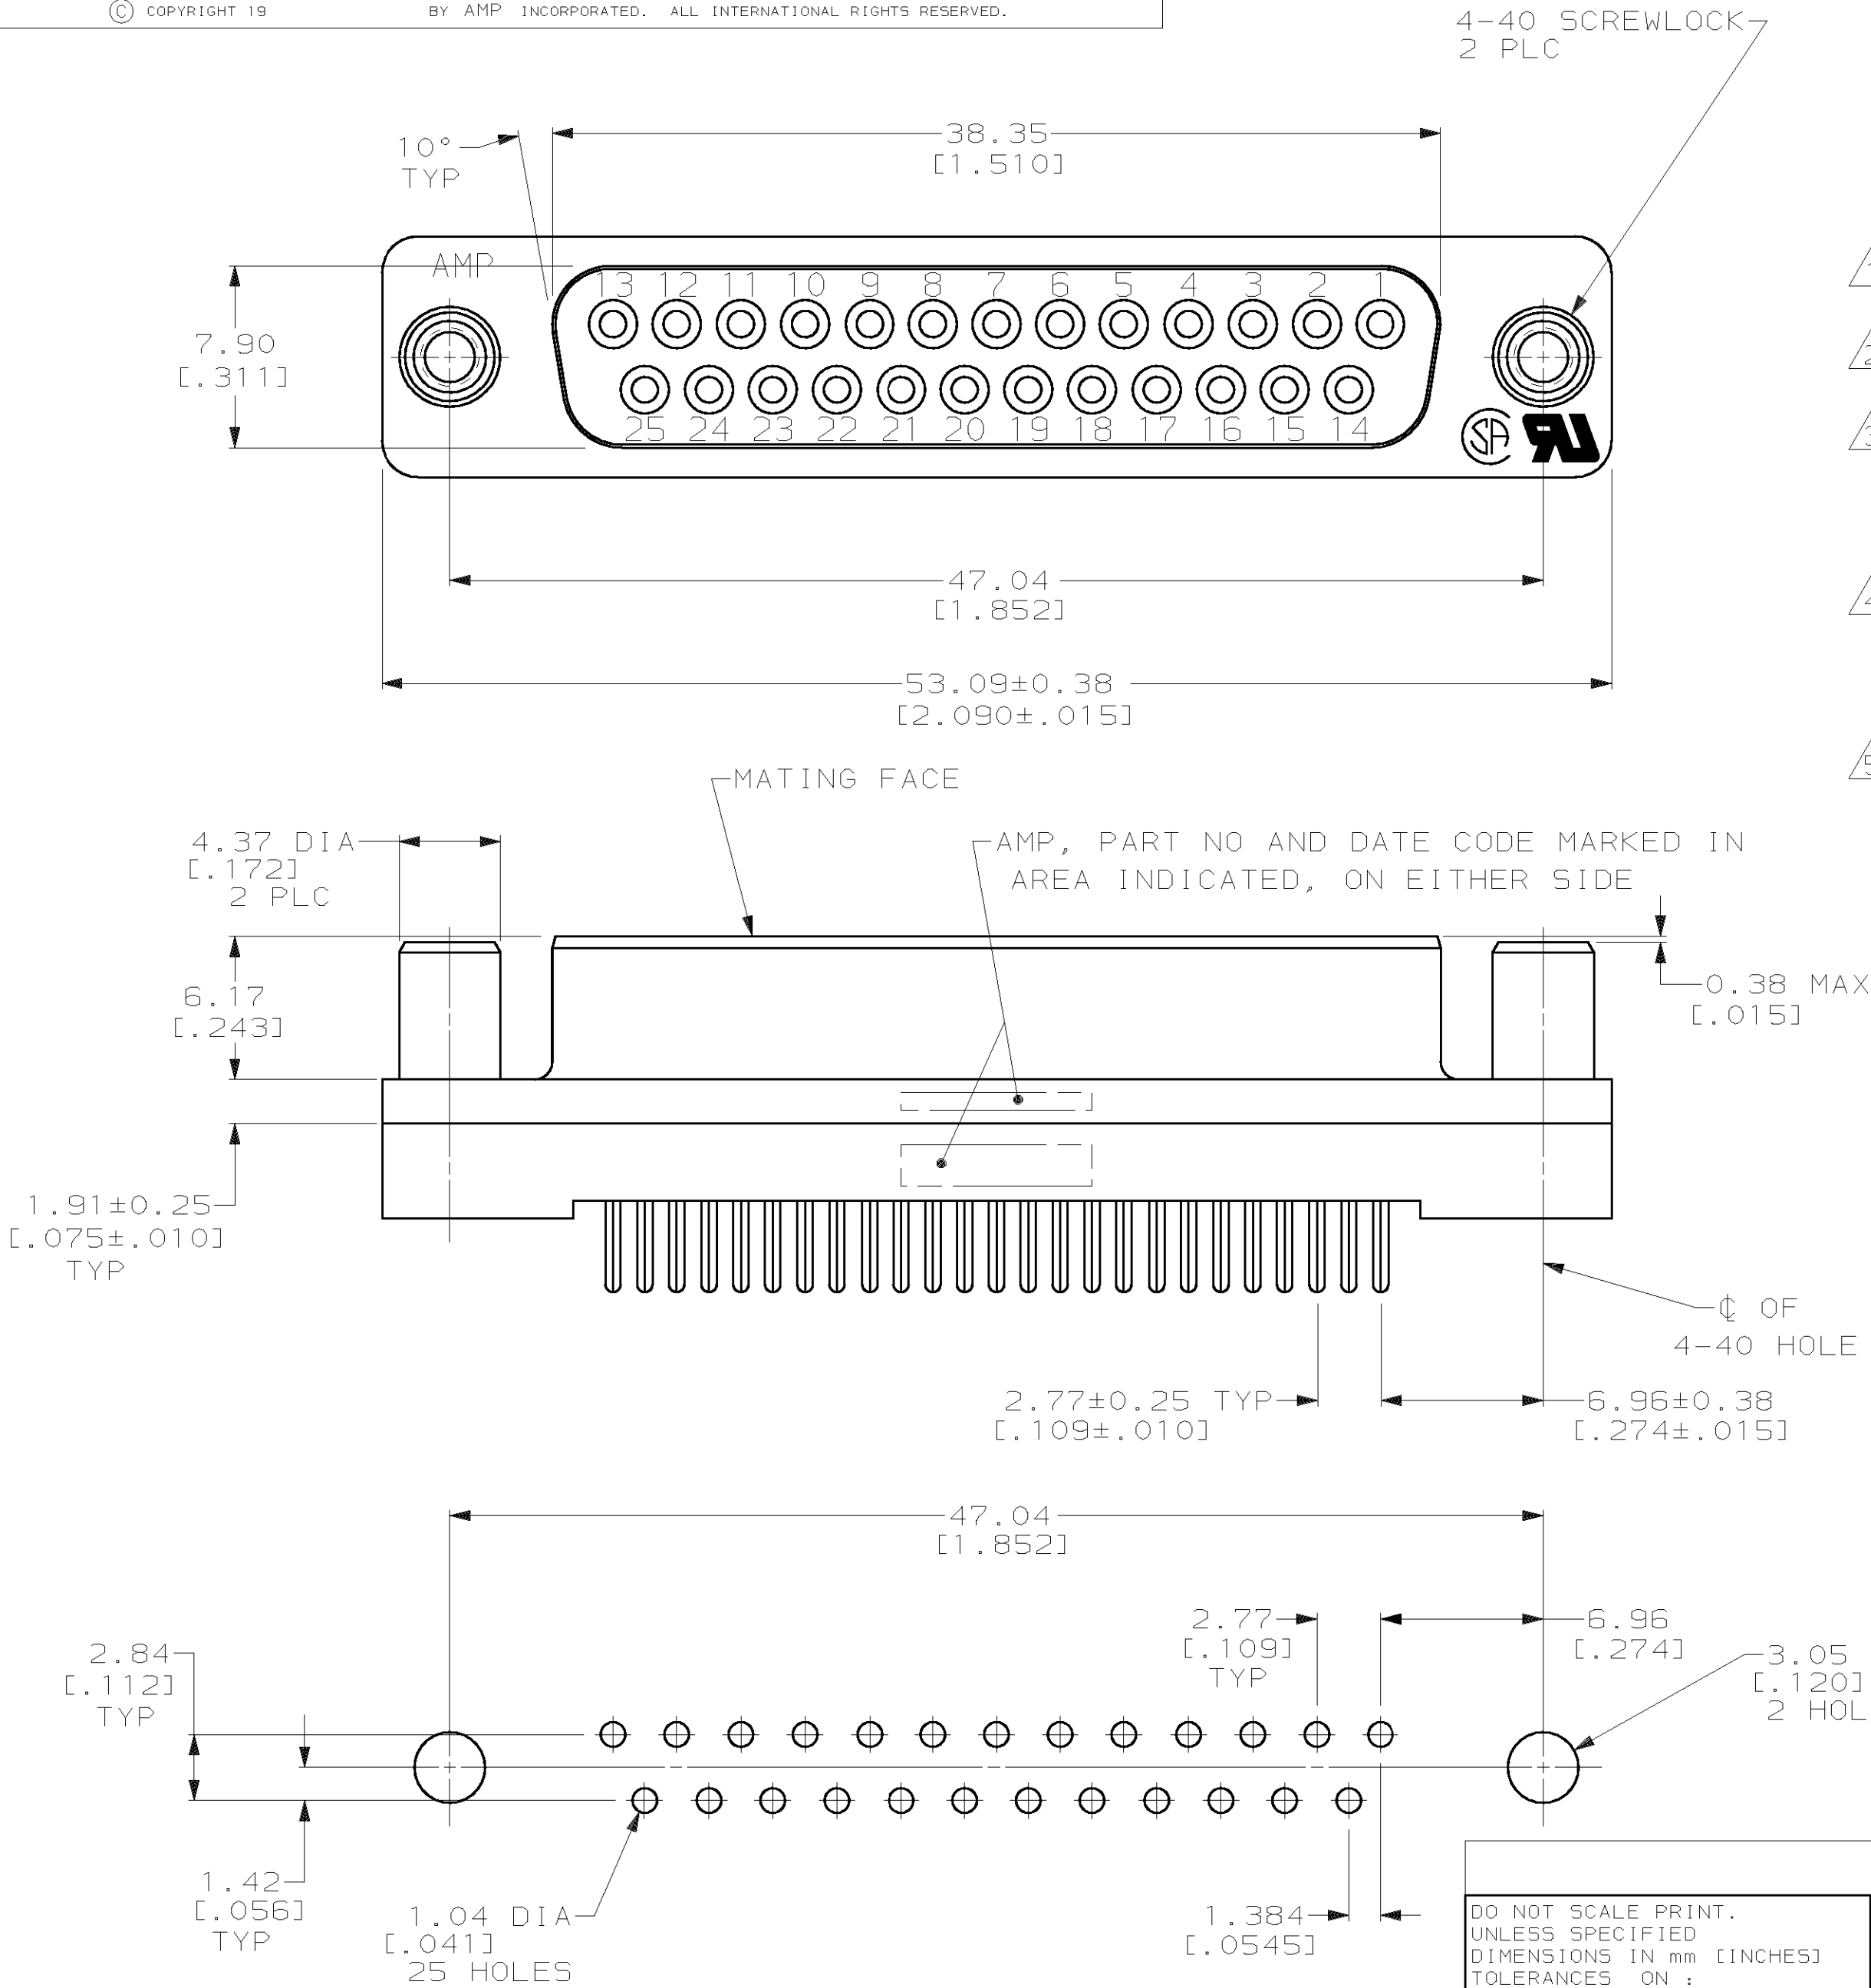

OBSOLETE	6.35 [0.250]	4	745078-8
OBSOLETE	6.35 [0.250]	3	745078-7
	4.32 [0.170]	4	745078-6
	4.32 [0.170]	3	745078-5
	3.18 [0.125]	4	745078-4
	3.18 [0.125]	3	745078-3
A		CONTACT FINISH	PART NO

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 [0.005] 3 PLC DEC ± - ANGLES ± 2°	DR 11-16-89 J McCLINTON
	CHK 2-2-90 R.STONE
MATERIAL	APPD 2-2-90 S.SCHIEFERLY
	APPD 2-2-90 C.ROHDE
FINISH	PRODUCT SPEC 108-40025
CONTACT: SEE TABLE	APPLICATION SPEC -
SCREWLOCK: 5	WEIGHT -

AMP AMP INCORPORATED Harrisburg, Pa. 17105		
NAME RECEPTACLE ASSEMBLY, SIZE 3, 25 POSN, VERTICAL, AMPLIMITE® HD-20		
SIZE C	CAGE CODE 00779	DRAWING NO 745078
SCALE 4:1	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745078-5](#)