



# BS88, IEC269 Industrial HRC Fuse Links

## Centre Bolted Tags 4 holes 550V ac 400V dc 450 - 630 Amps

FG


### Time-Current Characteristic Curves

Non Motor Rated

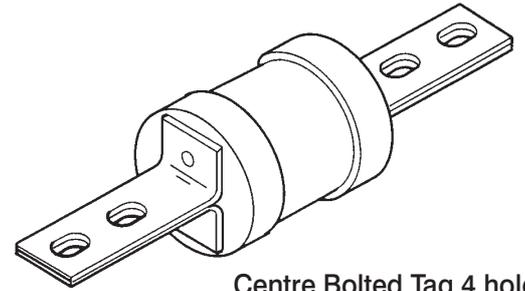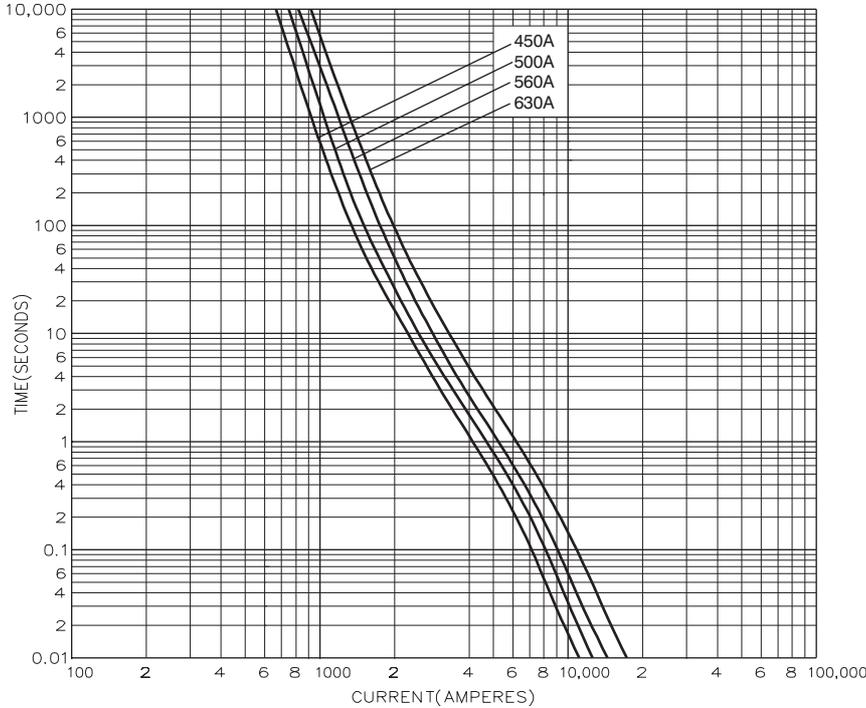

Centre Bolted Tag 4 hole

### Dimensional Data

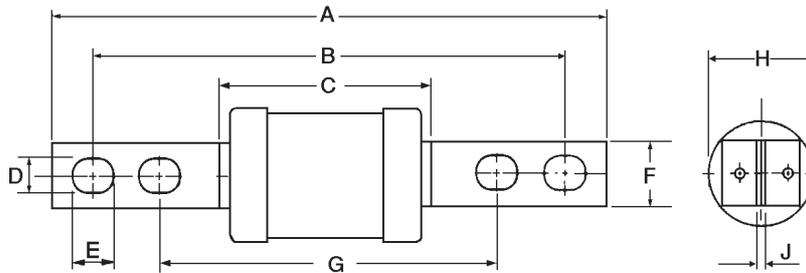

Catalog Number	I <sup>2</sup> t (Amps <sup>2</sup> Seconds x 10 <sup>3</sup> )			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
FG450	450	880	1600	32	550 ac 400 dc	262.0	231.0	77.5	10.5	15.5	38.0	167.0	74.0	6.4
FG500	500	1100	2000	38										
FG560	560	1400	2400	43										
FG630	630	2000	3500	50										

Packaging - 1 per carton

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Bussmann Division**  
**Cooper (U.K.) Ltd**  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom  
 Tel: (44) (0)1509 88 27 37  
 Fax: (44) (0)1509 88 27 86

Head Office  
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450  
 Bussmann WEB site - <http://www.bussmann.com>

A **COOPER** Industries Company

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cooper Bussmann:](#)

[FG450](#) [FG500](#)