
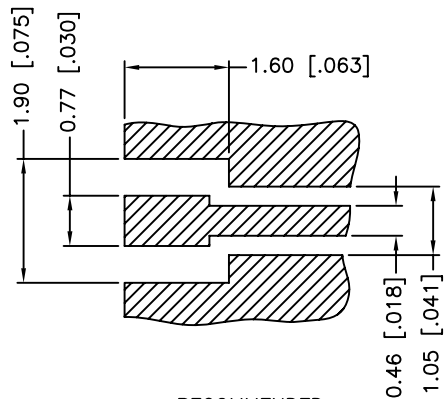
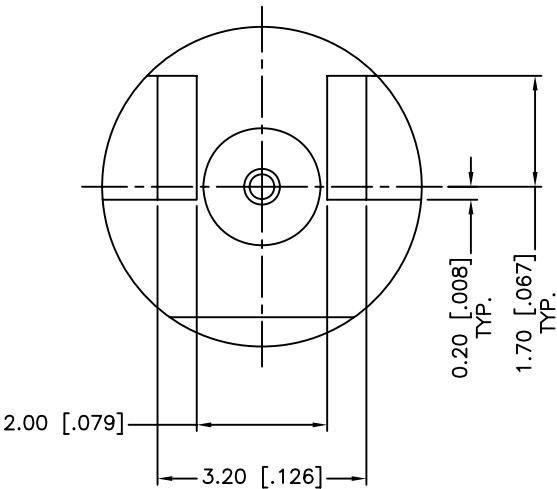
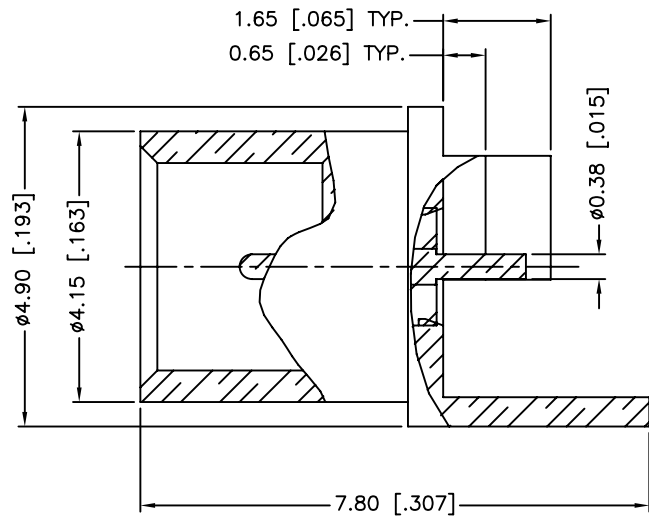


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/23/11	XXXXXX	INITIAL RELEASE



RECOMMENDED
PCB MOUNTING PATTERN

1. FREQUENCY RANGE: DC 0–26.5 GHZ
2. PCB THICKNESS=1.6 mm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"					APPROVALS		DATE		Amphenol Connex				
					DRAWN F.WANG		03/23/11						
					CHECKED								
					ISSUED				PART DESCRIPTION SMP END LAUNCH RECEPT. JACK, SMOOTH BORE (FOR 1.6MM THICK PCB)				
					SHEET 1 OF 1								
3 CONTACT PIN BRASS GOLD 1					CAD FILE		PART NO. 302100						
2 INSULATOR PTFE NATURAL 1					C:/CONNEX/302100.DWG		DWG. NO. 302100.DWG		REV. NC	SIZE A	SCALE NA		
1 BODY BERYLLIUM COPPER GOLD 1					DO NOT SCALE DRAWING								
DESCRIPTION MATERIAL FINISH QTY													

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[302100](#)