

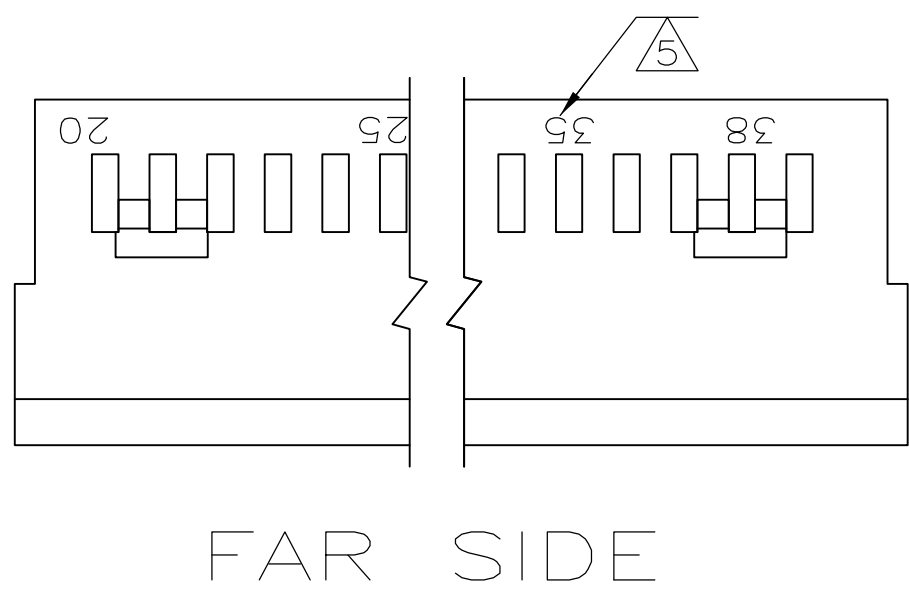
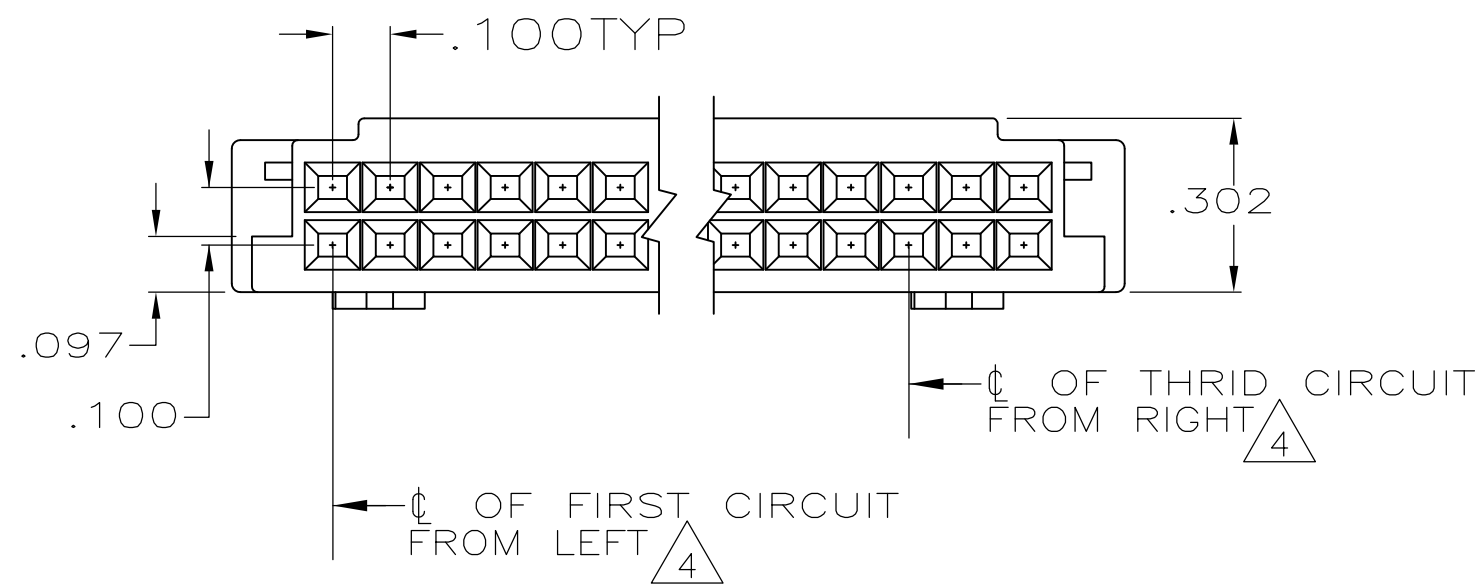
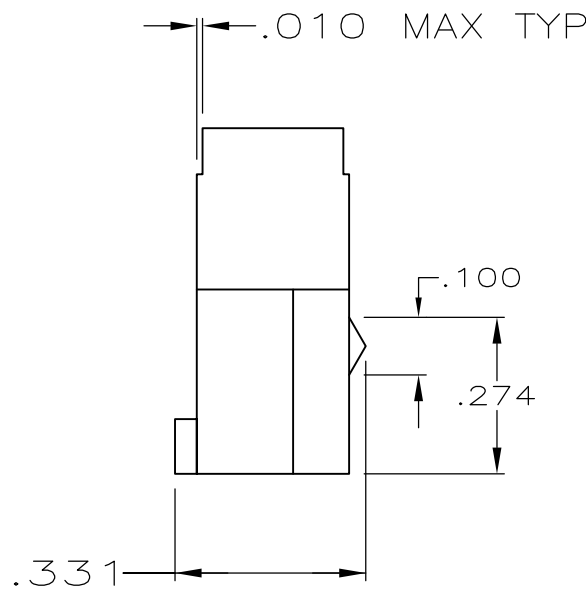
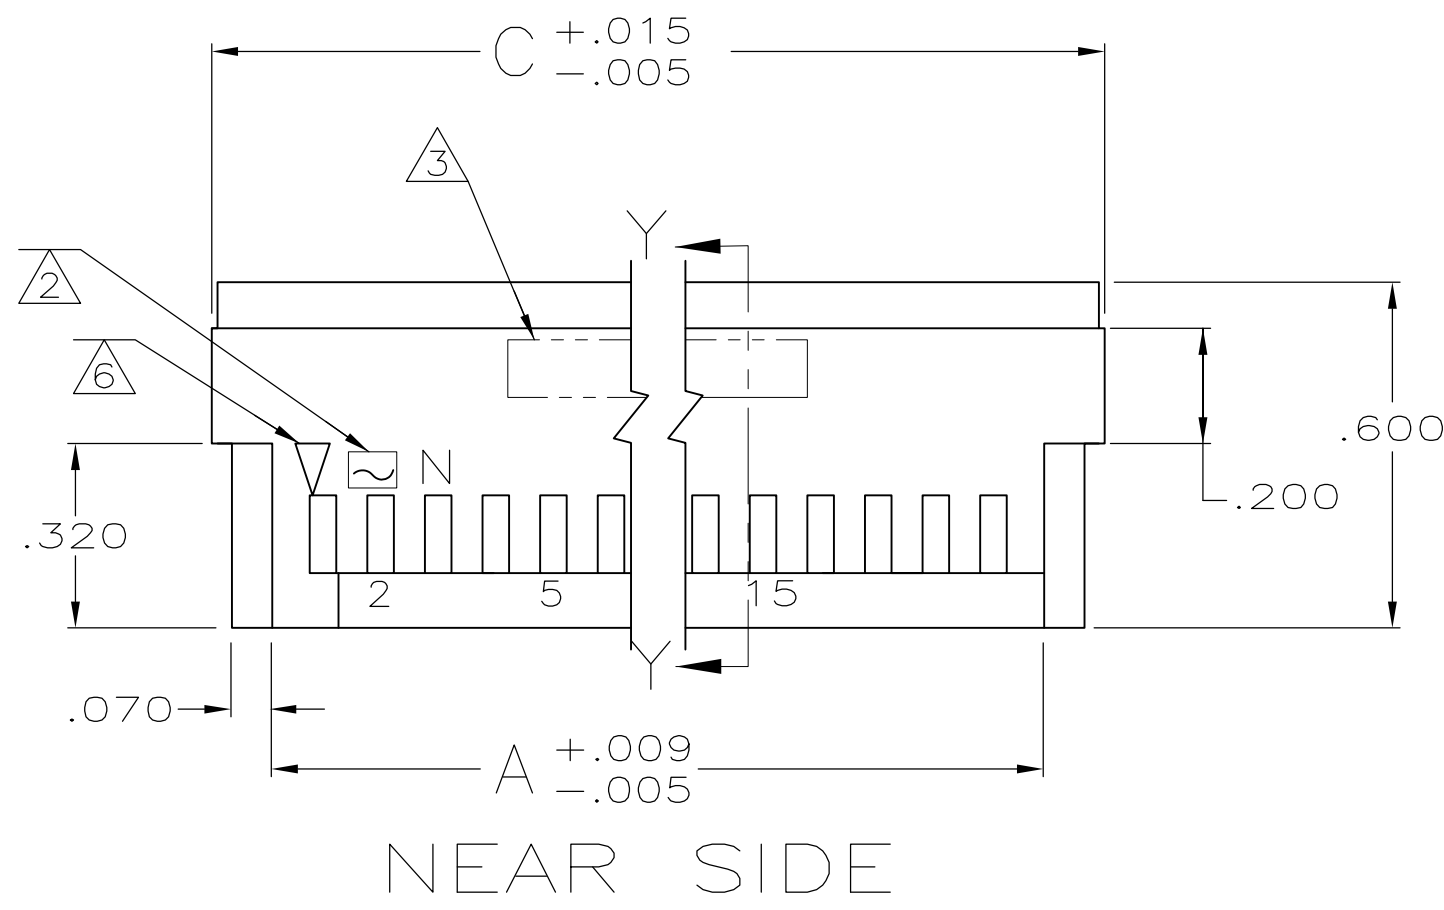


LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
GP	00			AR3	REVISED PER ECO-13-006318	13MAY13 RW SY

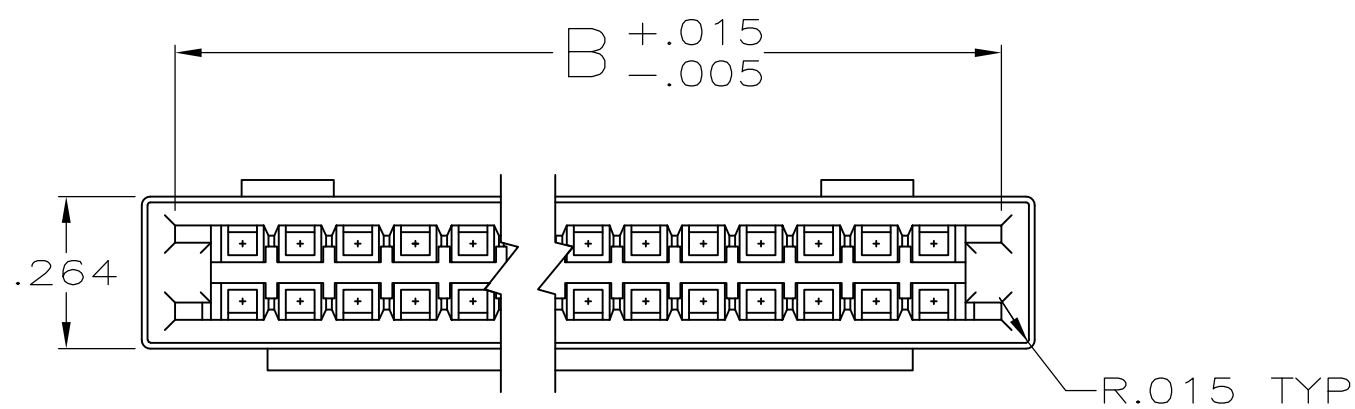

FLEXIBLE FLAT CABLE
AND/OR WIRE

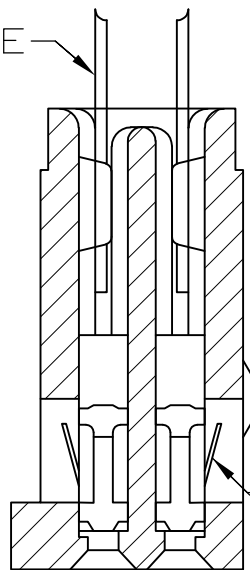

RECEPTACLE CONTACT
(CONTACTS MUST BE
ORDERED SEPARATELY)

SECTION Y—Y
LOADED HSG
SCALE 4:1
(FOR REF ONLY)

1 HOUSING WILL ACCOMODATE FLEXIBLE FLAT CABLE .050 OR .062 WIDE CONDUCTORS
(CABLE .015 MAX THK) AND/OR #22-32 AWG WIRE
WITH INSULATION RANGE OF .045 TO .069 DIA.

2 MOLDED "AMP" TRADEMARK, IN THIS AREA

3 PART NO. AND DATE CODE TO BE LASER MARKED

4 DETENTS: 6,8,10,12 & 18 POSN,(1) DETENT LOCATED
AS FOLLOWS:

6 & 8 POSN- ϕ OF THRID CIRCUIT FROM RIGHT
10 & 12 POSN- ϕ OF FOURTH CIRCUIT FROM RIGHT
18 POSN- ϕ OF SIXTH CIRCUIT FROM RIGHT
20 POSN & ABOVE- (2) DETENTS LOCATED AS SHOWN

5 CAVITY IDENT NO. TO BE LASER MARKED
(SEE TABLE)

6 INDICATES POSITION 1, SURFACE TEXTURE CONTRAST'S WITH REST OF HOUSING

7. THIS HOUSING WILL MATE WITH FFC PIN HOUSING

8 OBSOLETE PART NUMBER

9 SUPERSEDED BY AS MOLDED PART NUMBER.

10 GLASS-FILLED NYLON, BLACK, UL V-0.

11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8	4-88179-1	12-15-22	2-5-10	1.350	1.234	1.140	22	4-88179-2
8	3-88179-9			.650	.534	.440	8	4-88179-0
8	3-88179-7	16-20-25-30	2-5-10-14	1.750	1.634	1.540	30	3-88179-8
9	3-88179-5	18-25-30-34	2-5-10-16	1.950	1.834	1.740	34	3-88179-6
11	3-88179-3	7-12	2-5	.850	.734	.640	12	3-88179-4
8	3-88179-1	4-6	2	.550	.434	.340	6	3-88179-2
8	2-88179-9	6-10	2-4	.750	.634	.540	10	3-88179-0
8	2-88179-7			3.750	3.634	3.540	70	2-88179-8
8	2-88179-5			3.150	3.034	2.940	58	2-88179-6
8	2-88179-3	23-25-30-35-40-44	2-5-10-15-20-21	2.450	2.334	2.240	44	2-88179-4
1	2-88179-1	21-25-30-35-40	2-5-10-15-19	2.250	2.134	2.040	40	2-88179-2
8	1-88179-9	19-25-30-36	2-5-10-17	2.050	1.934	1.840	36	2-88179-0
8	1-88179-7			1.650	1.534	1.440	28	1-88179-8
8	1-88179-5	14-20-26	2-5-12	1.550	1.434	1.340	26	1-88179-6
11	1-88179-3	13-20-24	2-5-11	1.450	1.334	1.240	24	1-88179-4
11	1-88179-1	26-30-35-40-45-50	2-5-10-15-20-24	2.750	2.634	2.540	50	1-88179-2
11	88179-9	10-15-18	2-5-8	1.150	1.034	.940	18	1-88179-0
8	88179-7	34-40-45-50-55-60-66	2-5-10-15-20-25-32	3.550	3.434	3.340	66	88179-8
11	88179-3	20-25-30-35-38	2-5-10-15-18	2.150	2.034	1.940	38	88179-6
11	88179-2	11-15-20	2-5-9	1.250	1.134	1.040	20	88179-5
8	88179-1			3.250	3.134	3.040	60	88179-4

LASER MARKED	FAR SIDE	NEAR SIDE	C	B	A	NO OF POS'N	AS MOLDED
PART NUMBER	CAVITY POSN NO. STAMPED						PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATE HELM CHK D.L.ROCKER APVD	11/07/88 3-6-89	STE TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	HOUSING,RCPT,DBL ROW WITH DETENTS,.100 CL.	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	$\pm$ - $\pm$ - $\pm$ - $\pm$.005 $\pm$ - $\pm$ -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	WEIGHT	A1	00779	88179
CUSTOMER DRAWING		SCALE	3:1	SHEET	1 OF 1
		REV	AR3		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-88179-6](#)