
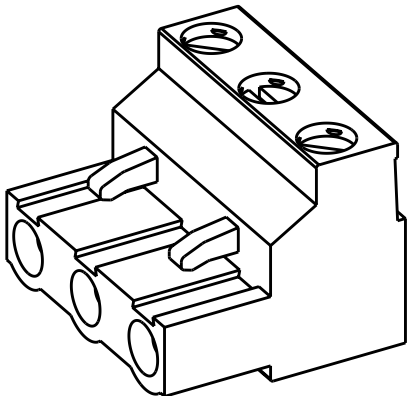
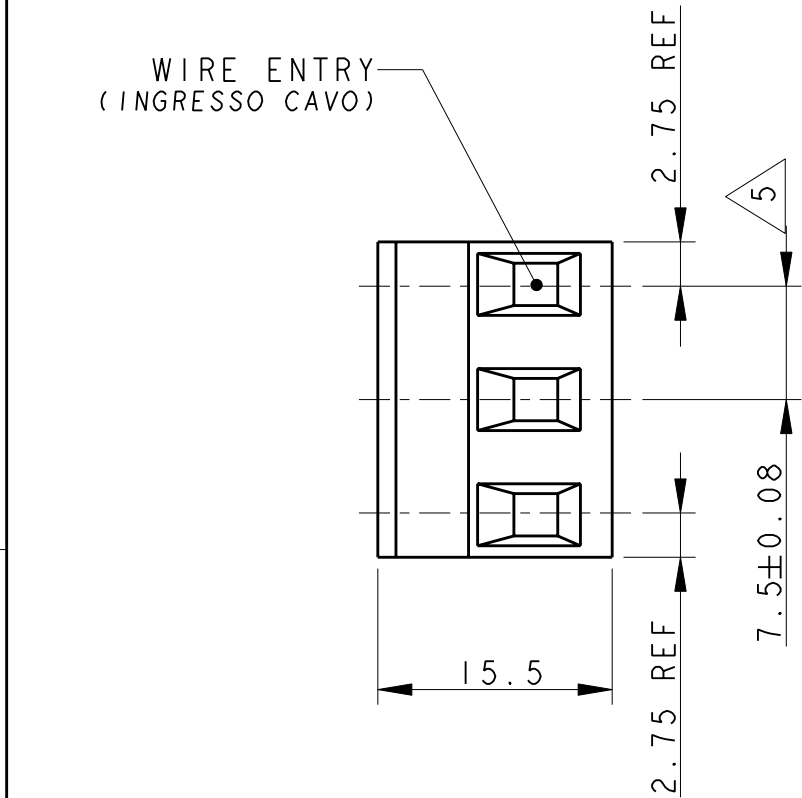


2

1

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C2	REVISED PER ECO-11-008467	25APR2011	HMR	CR

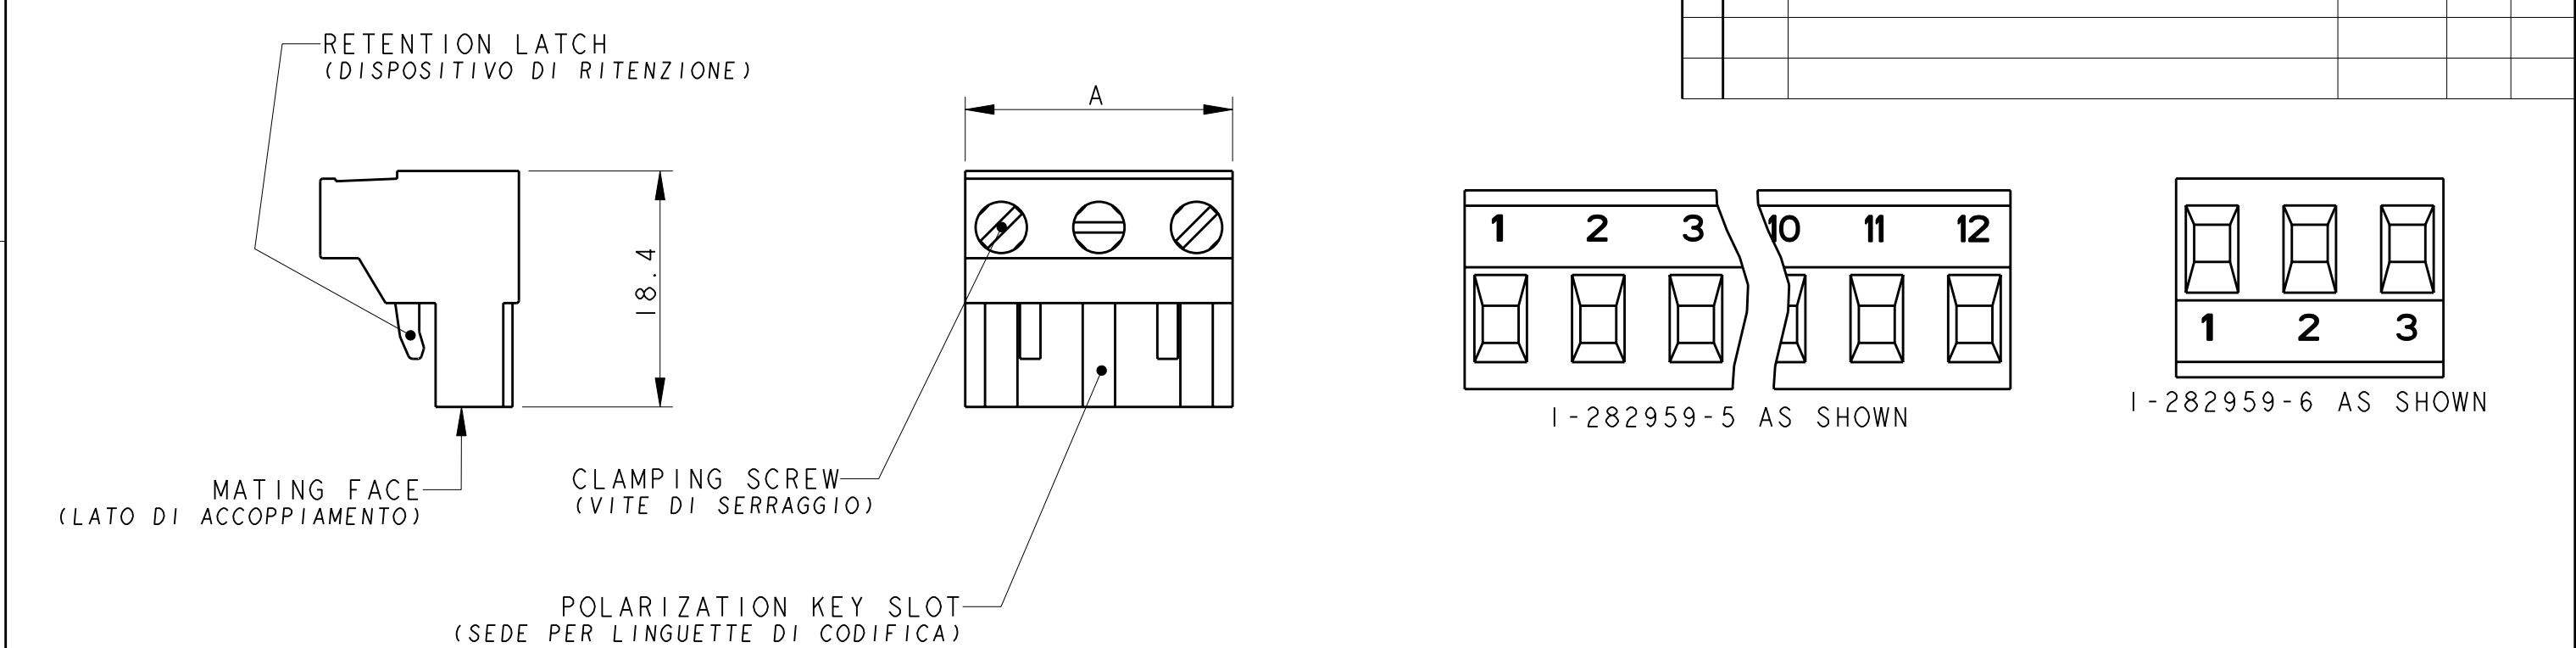

282959-3 AS SHOWN

	/	GRAY	20.5	3	1-282959-9
6	AS SHOWN	GREEN	20.5	3	1-282959-6
6	AS SHOWN	GREEN	90.0	12	1-282959-5
7	/	GREEN	73.0	10	1-282959-4
7	/	BLACK	20.5	3	1-282959-3
	/	GREEN	88.0	12	1-282959-2
	/	GREEN	80.5	11	1-282959-1
	/	GREEN	73.0	10	1-282959-0
	/	GREEN	65.5	9	282959-9
	/	GREEN	58.0	8	282959-8
	/	GREEN	50.5	7	282959-7
	/	GREEN	43.0	6	282959-6
	/	GREEN	35.5	5	282959-5
	/	GREEN	28.0	4	282959-4
	/	GREEN	20.5	3	282959-3
	/	GREEN	13.0	2	282959-2
MARKING		COLOUR	DIM.A	N° OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 25JUN96	TE Connectivity									
		CHK R CANTORE 25JUN96										
		APVD R CANTORE 25JUN96										
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL BLOCK PLUG, 7.5mm PITCH -								
		0 PLC ±-										
		1 PLC ±0.2										
		2 PLC ±0.20										
		3 PLC ±0.001										
		4 PLC ±0.0001										
MATERIAL -		FINISH -		PRODUCT SPEC -		APPLICATION SPEC -		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
				WEIGHT -				A3		00779	C-282959	-
CUSTOMER DRAWING						SCALE 2:1		SHEET 1 OF 2		REV C2		

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		-	SEE SHEET I SEE SHEET I	-	-	-

1 MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0.
COLOURS: GRAY, RAL 7032.
BLACK.
GREEN.
CLAMP: BRASS, NICKEL PLATED.
DOUBLE SIDE CONTACT SPRING: PHOSPHOR BRONZE, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.

2 WIRE SIZE RANGE
SOLID WIRE: 0,03-2,5mm² (13AWG).
STRANDED WIRE: 0,03-1,5mm² (15AWG).

3 RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC. FILE N° E60677.

4 IMQ CERTIFICATE WITH SURVEILLANCE IN
CONFORMITY WITH IEC 998-1/998-2-1.

5 NOT CUMULATIVE TOLERANCE.

6 INK MARKING : BLACK COLOUR
NUMERICAL SEQUENCE : FROM LEFT TO RIGHT,
WIRE ENTRY SIDE

7 NOT YET RELEASED FOR PRODUCTION

1 MATERIALI E FINITURE
BLOCCHETTO: PA 6-6, UL 94-V0.
COLORE: GRIGIO, RAL 7032.
NERO.
VERDE.
MORSETTO: OTTONE NICHELATO.
DOPPIA MOLLA DI CONTATTO: BRONZO FOSFOROSO STAGNATO.
VITE DI SERRAGGIO: M3, OTTONE NICHELATO.

2 CAPACITA' DI CONNESSIONE
CAVO UNIPOLARE: 0,03-2,5mm² (13AWG).
CAVO TREFOLATO: 0,03-1,5mm² (15AWG).


3 PRODOTTO OMOLOGATO DA UNDERWRITERS
LABORATORIES INC. FILE N° E60677.

4 CERTIFICATO CON SORVEGLIANZA IMQ IN CONFORMITA'
AGLI STANDARD IEC 998-1/998-2-1.

5 TOLLERANZA NON CUMULATIVA.

6 MARCHIATURA AD INCHIOSTRO : COLORE NERO
SEQUENZA NUMERICA : DA SINISTRA VERSO DESTRA,
LATO INGRESSO CAVO

7 NON RILASCIATO IN PRODUZIONE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 25JUN96	 TE Connectivity		
		CHK R CANTORE 25JUN96			
		APVD R CANTORE 25JUN96			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL BLOCK PLUG, 7.5mm PITCH	
		0 PLC ±-		PRODUCT SPEC	
		1 PLC ±0.2		-	
		2 PLC ±0.20		APPLICATION SPEC	
		3 PLC ±0.001		-	
		4 PLC ±0.0001		WEIGHT	
		ANGLES ±2		-	
MATERIAL -		FINISH -		SIZE A3	
				CAGE CODE 00779	
				DRAWING NO C-282959	
				RESTRICTED TO -	
				SCALE 1:1	
				SHEET 2	
				OF 2	
				REV C2	
				CUSTOMER DRAWING	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282959-7](#)