


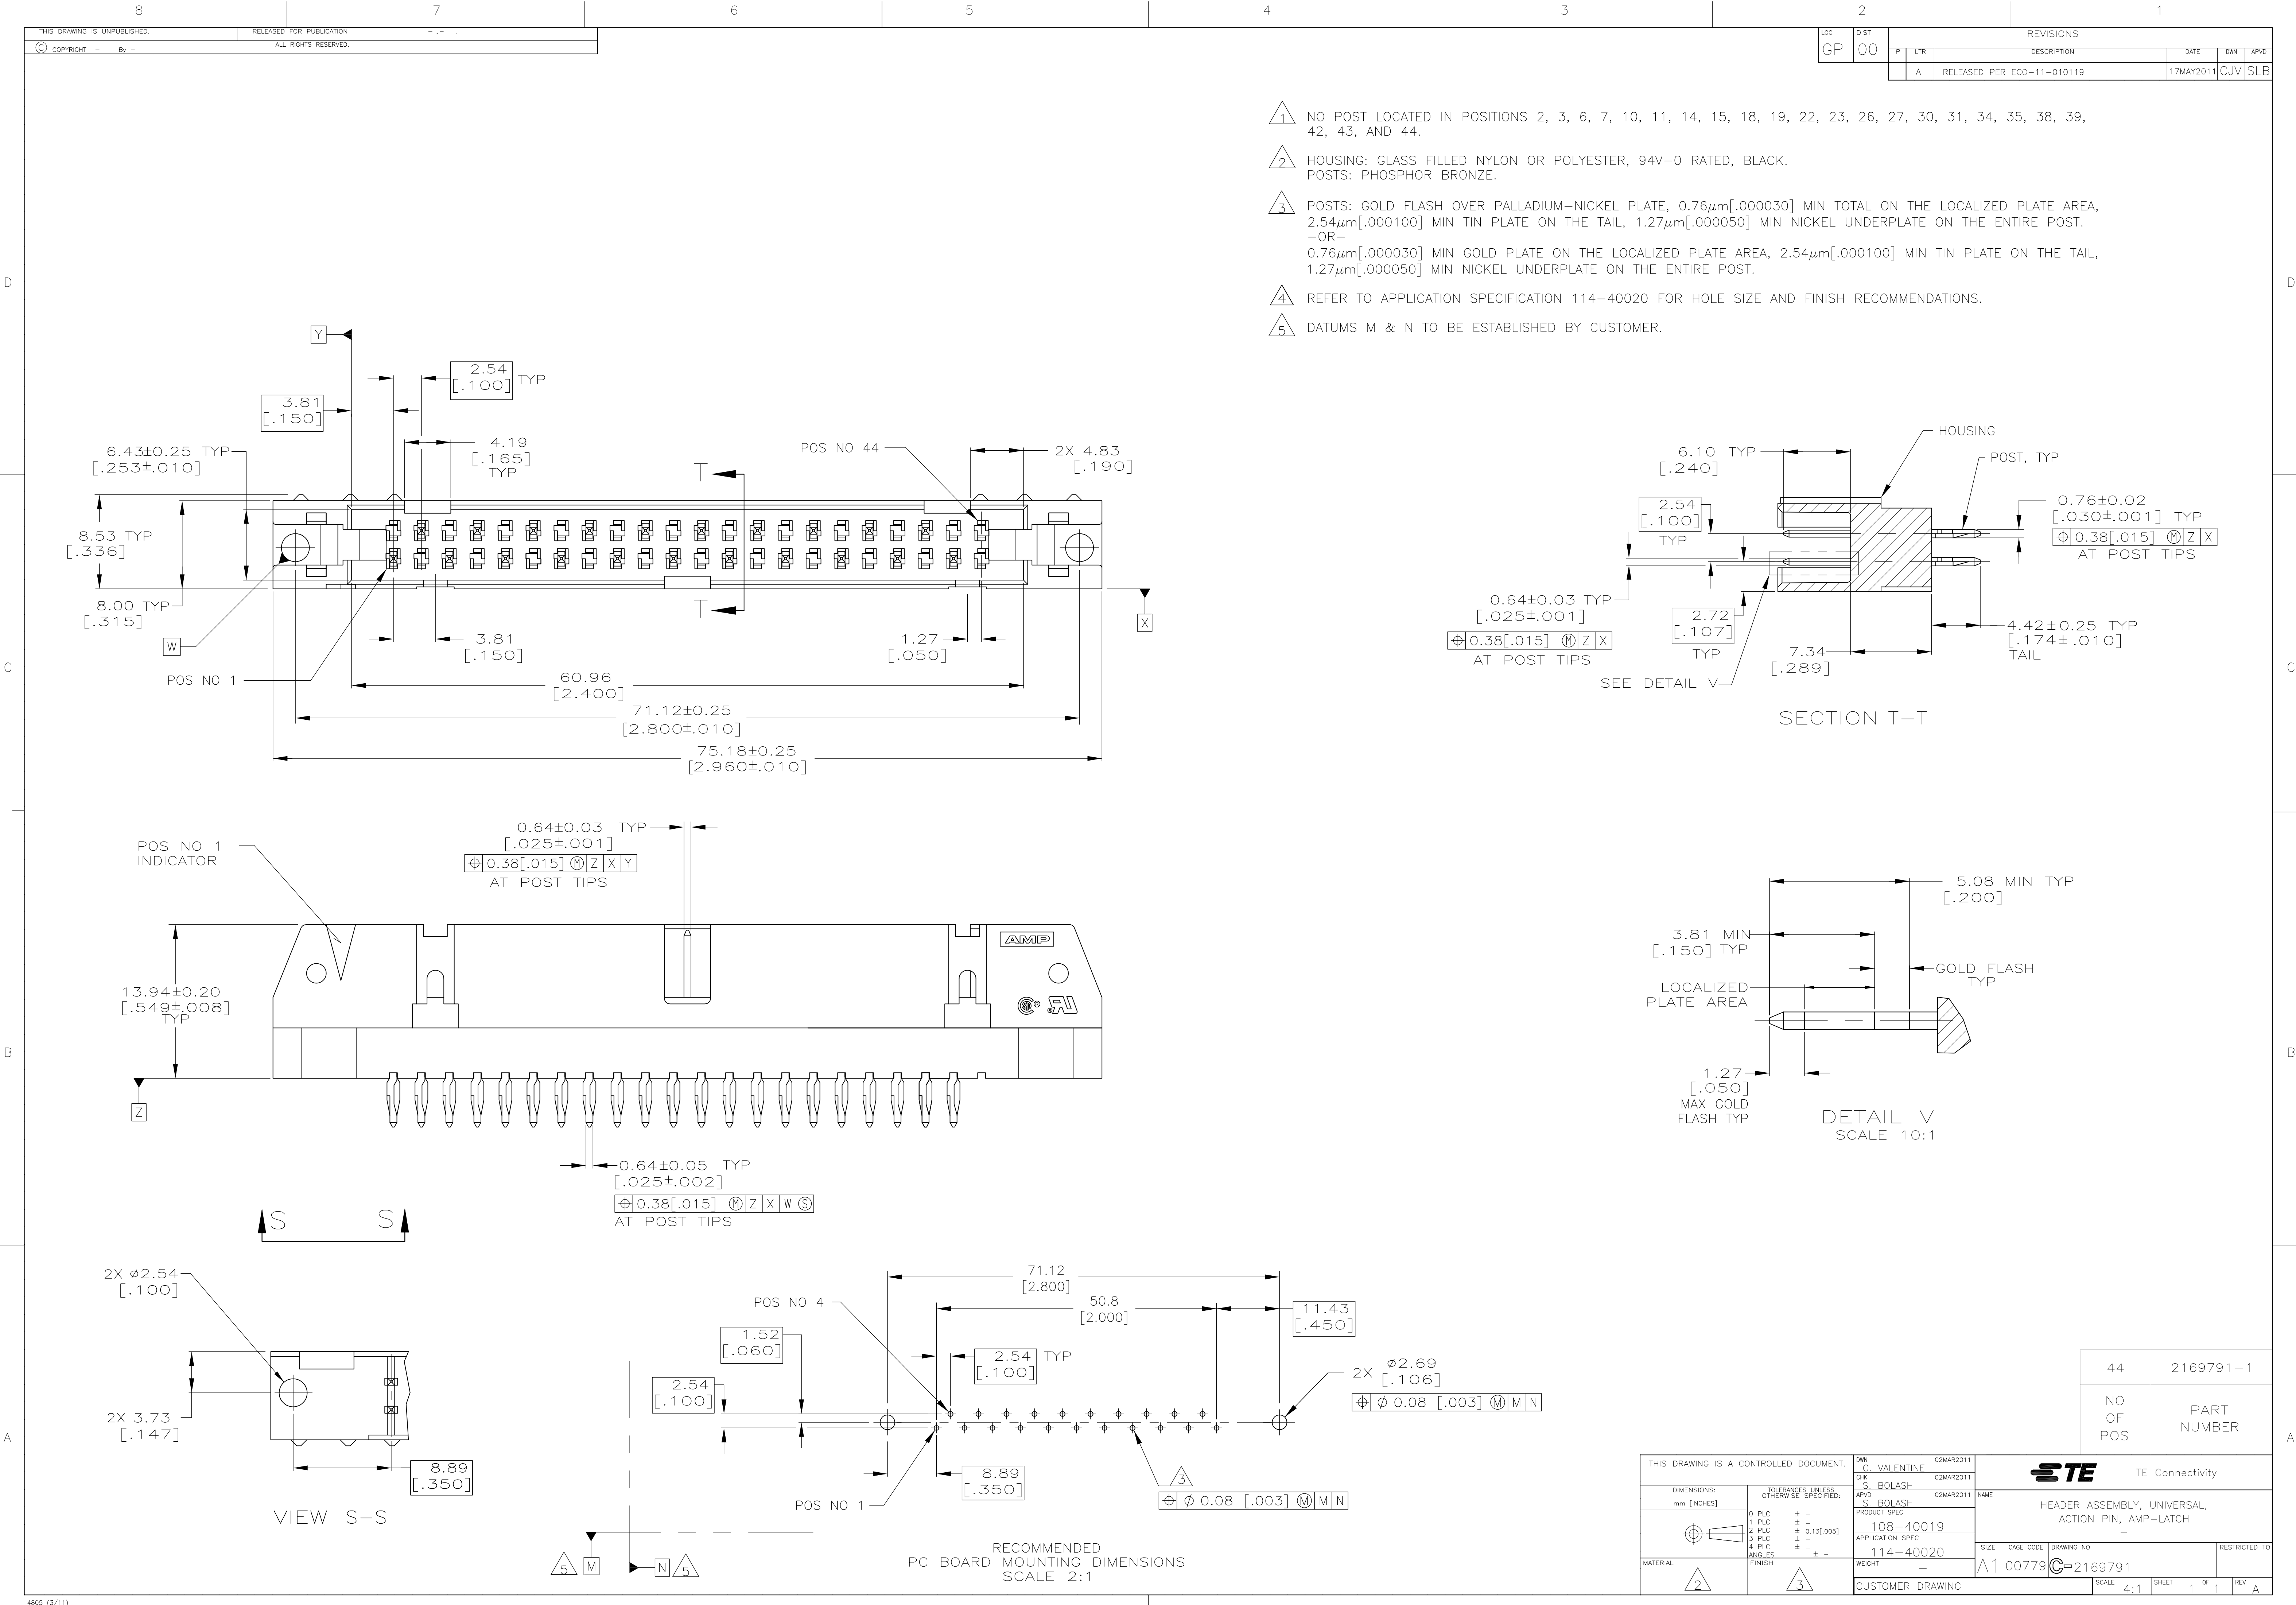

- 1 NO POST LOCATED IN POSITIONS 2, 3, 6, 7, 10, 11, 14, 15, 18, 19, 22, 23, 26, 27, 30, 31, 34, 35, 38, 39, 42, 43, AND 44.
- 2 HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK.
POSTS: PHOSPHOR BRONZE.
- 3 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76µm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54µm[.000100] MIN TIN PLATE ON THE TAIL, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
0.76µm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54µm[.000100] MIN TIN PLATE ON THE TAIL, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 4 REFER TO APPLICATION SPECIFICATION 114-40020 FOR HOLE SIZE AND FINISH RECOMMENDATIONS.
- 5 DATUMS M & N TO BE ESTABLISHED BY CUSTOMER.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 02MAR2011	TE Connectivity									
DIMENSIONS: mm [INCHES]		CHK S. BOLASH 02MAR2011	NAME									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		RPVD S. BOLASH 02MAR2011	PRODUCT SPEC									
		108-40019										
		APPLICATION SPEC										
		114-40020										
		WEIGHT -										
MATERIAL	FINISH	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO						
		A1		00779	C=2169791	-						
CUSTOMER DRAWING					SCALE	4:1	SHEET	1	OF	1	REV	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2169791-1](#)