
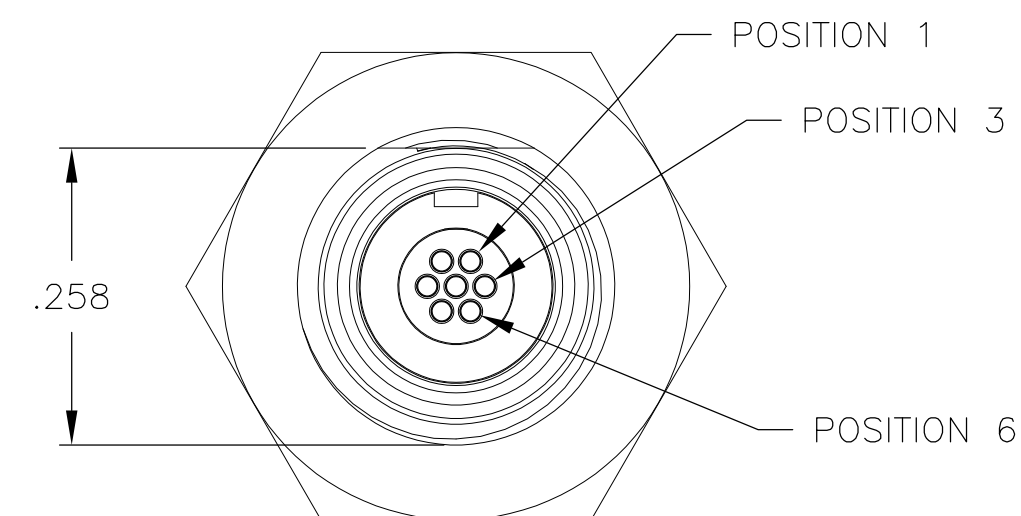


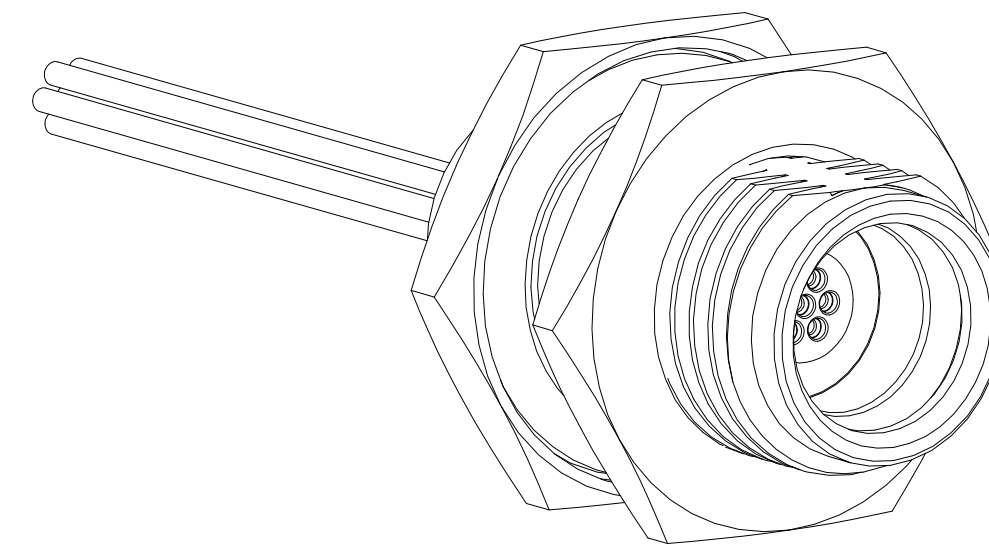

- 1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
 O-RING MATERIAL: FLUOROSILICONE
 - 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
 - 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
 - 4 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS 303-0029

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN M. STORRY7 MAY 99		 TE Connectivity								
			CHK E. PAULUS7 MAY 99										
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. KAIN27 JAN 00		NAME							
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE ASSEMBLY, CIRCULAR, PANEL MOUNT, THREADED COUPLING/ QUICK DISCONNECT, METAL, 7 POSITION							
		1 PLC ± -		—									
		2 PLC ± .010		APPLICATION SPEC									
		3 PLC ± .005		—									
4 PLC ± -		ANGLES ± ± 1°		WEIGHT —		SIZE A2		CAGE CODE 0PJN9		DRAWING NO C-1589060		RESTRICTED TO —	
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE 6:1		SHEET 1 of 1		REV H			
SEE NOTES		SEE NOTES											

1589060

2

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM007SC2DC036P](#)