


DIMENSIONS mm (inches)

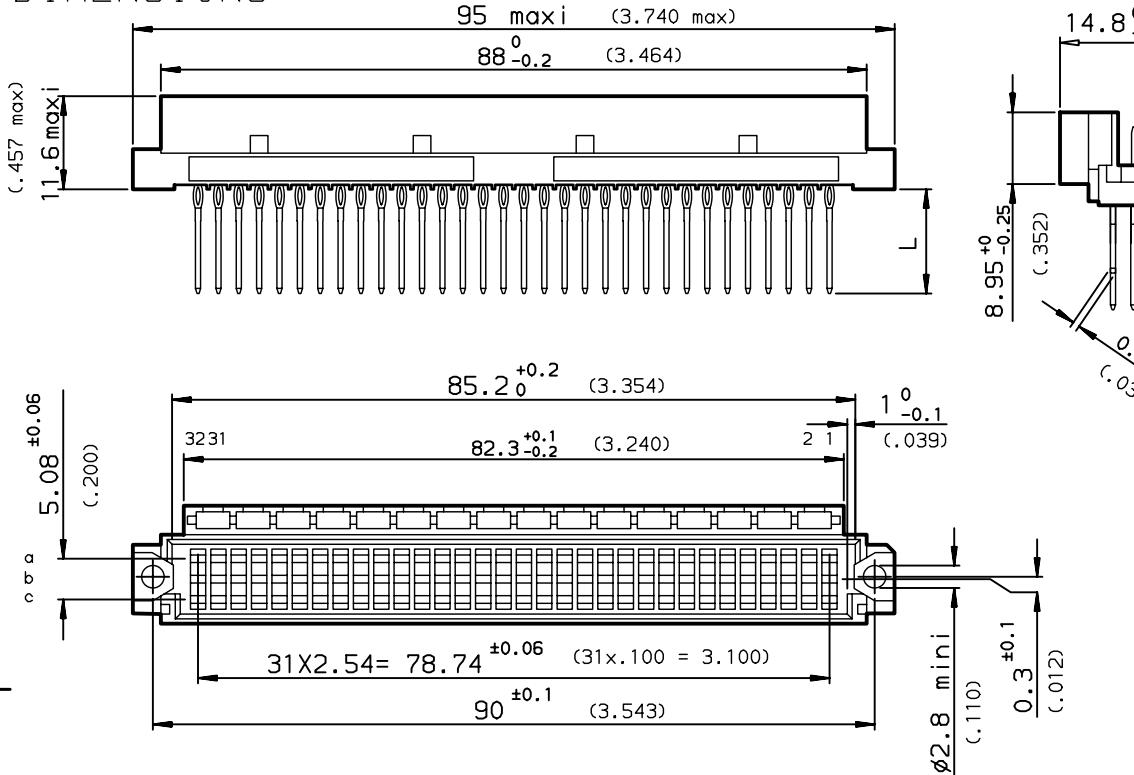

PART NUMBER		8609	□	□	08	□	7	□	5	□
PIN OUT										
rows a-b-c		3	96							
rows a-c		4	64							
NUMBER OF CONTACTS										
TERMINATION										
L = 13.25 ±0.25 (.521)		1 wrap								91
L = 17.25 ±0.25 (.679)		2 wraps								92
L = 20.95 ±0.25 (.825)		3 wraps								93
L = 4.20 ±0.25 (.165)		short post								94
PERFORMANCE CLASS										
DIN 41612 class 3										4
DIN 41612 class 2										
DIN 41612 class 1										
TERMINATION TYPE										
TIN LEAD										000E1
LEAD FREE										E1LF

rev	ecn no	dr	date
E	-	ROU	1999/11/30
F	LS05-004	JTA	2005/02/28
G	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

FCJ

STRAIGHT MALE - STYLE R
PRESS FIT WITH KEYING

catalog no

-

dwg no

-

Rev.

C-8609-0521

G

CUSTOMER sheet 1 of 1

PDM: Rev:G

STATUS: Released

Printed: May 14, 2011

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093960892755E1LF](#) [86093960894755E1LF](#)