

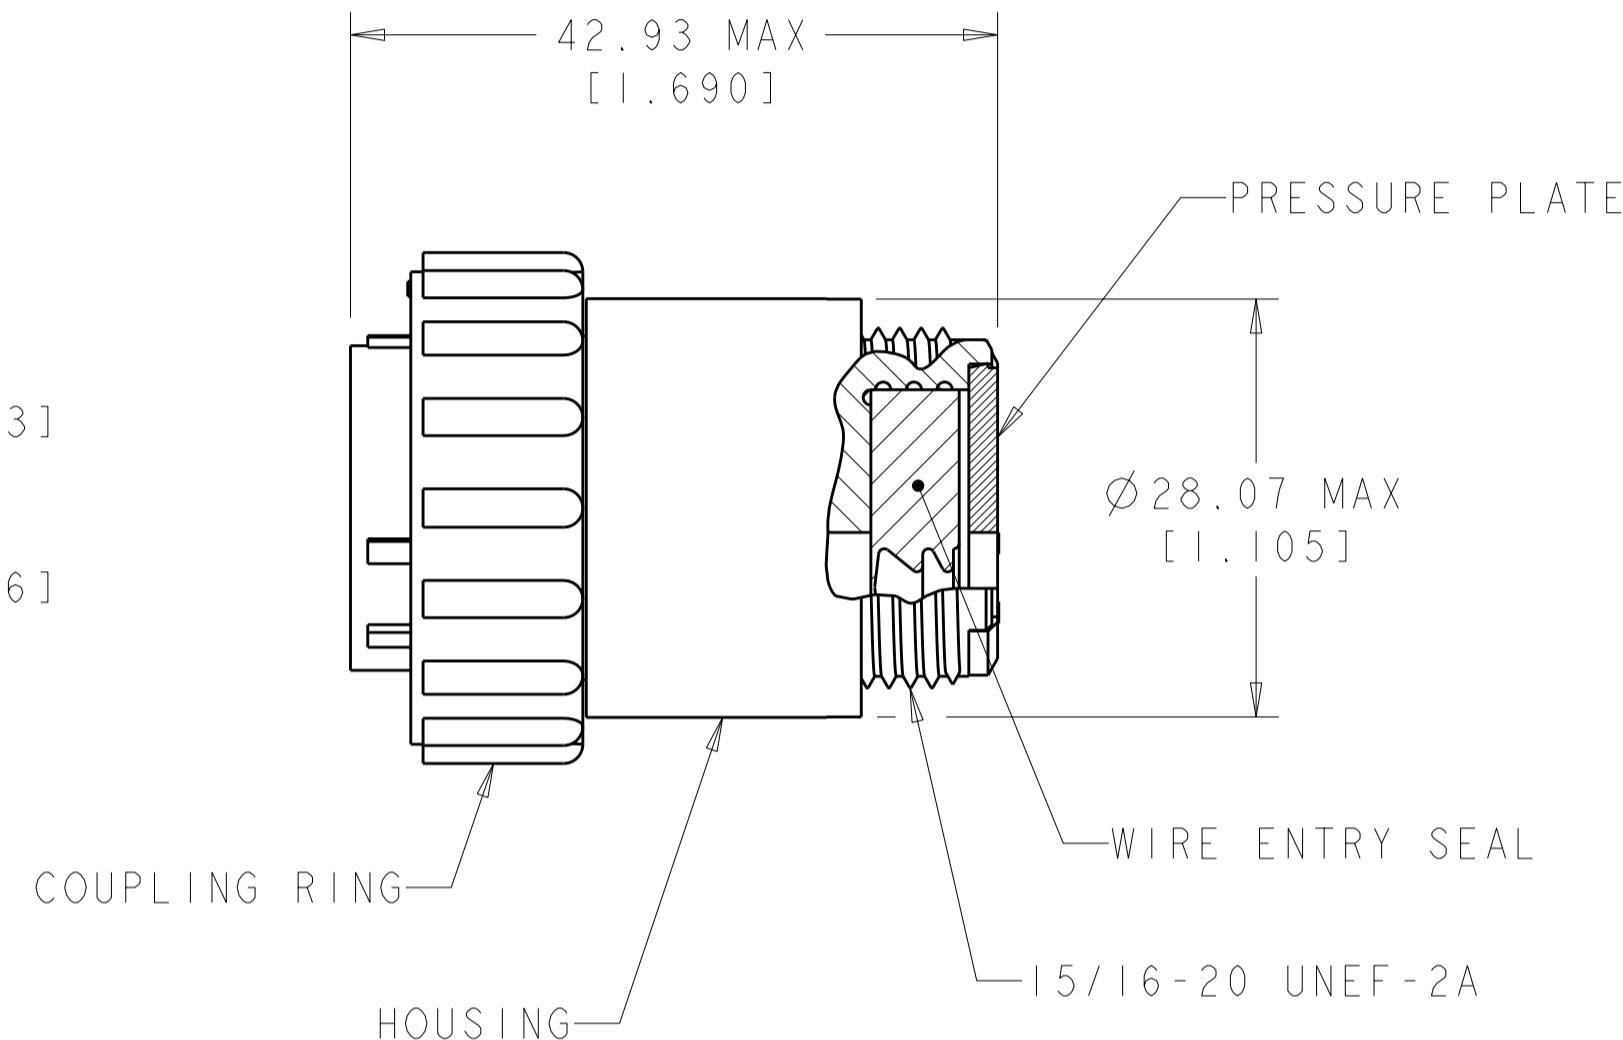


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED

© COPYRIGHT 20 BY - ALL RIGHTS RESERVED

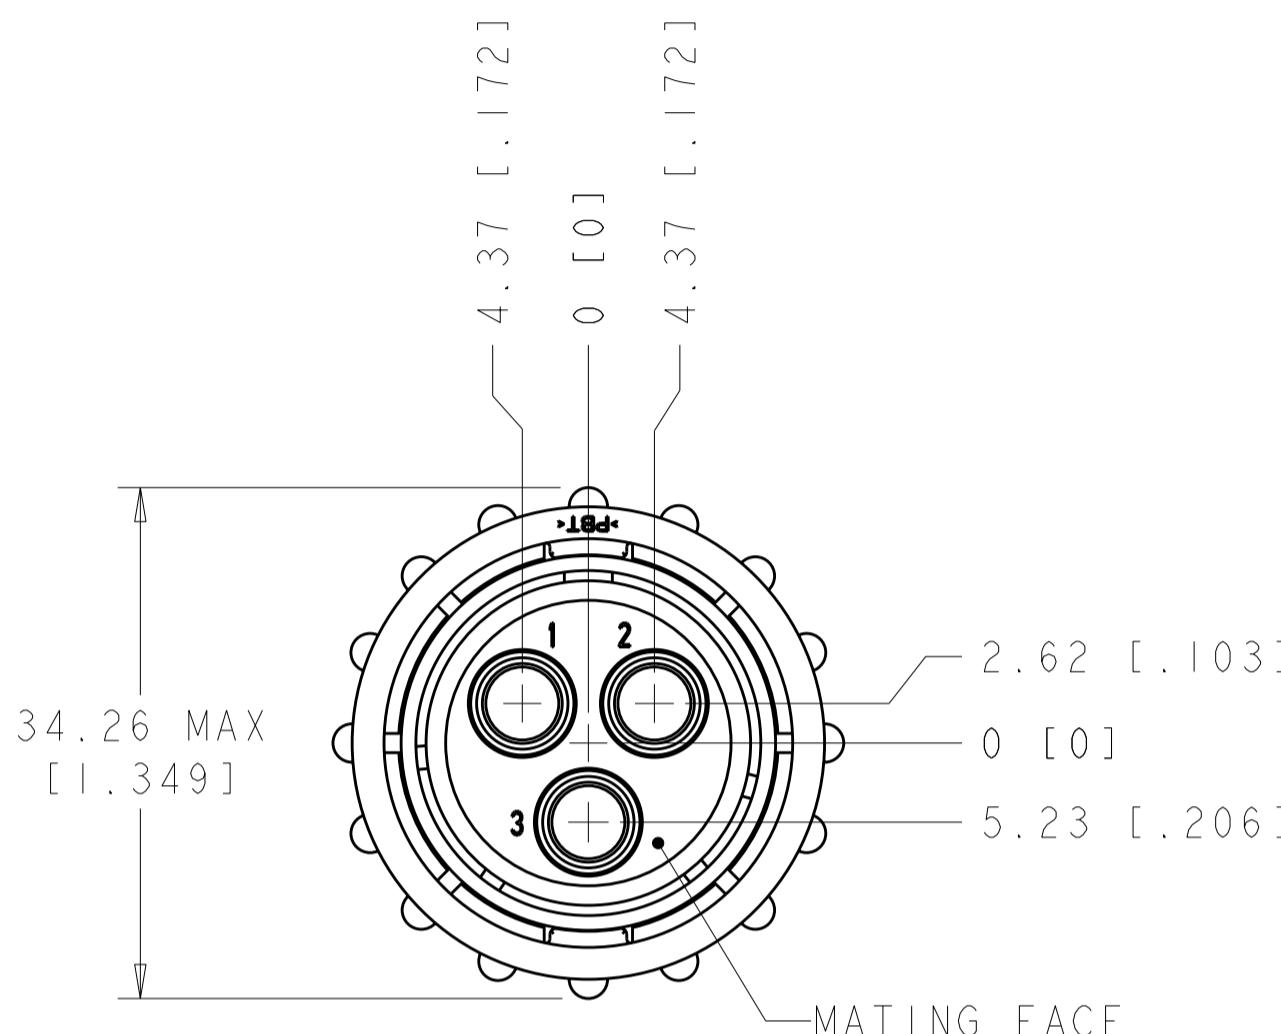

- 1 HOUSING & PRESSURE PLATE: NYLON, BLACK.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.
- 2 COUPLING RING: POLYESTER, BLACK.
- 3 COUPLING RING: POLYPHENYLENE OXIDE, BLACK.
- 4. WILL ACCEPT (3) POWER MALE CONTACTS.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D. RENAUD/D. SINIS

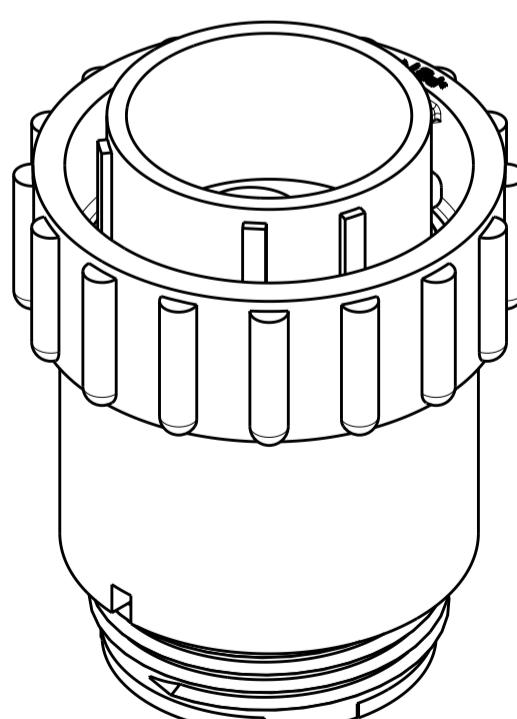

5	OBSOLETE	 	2.41-5.21 [.095-.205]	788188-3
		 	3.81-6.73 [.150-.265]	788188-2
		 	2.41-5.21 [.095-.205]	788188-1
	MATERIAL & FINISH	INSULATION RANGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 08FEB2000	 TE Connectivity
DIMENSIONS: mm [INCHES]		CHK K. DOWHOWER 08FEB2000	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. DOWHOWER 08FEB2000	
		PRODUCT SPEC 108-1579	
 0 PLC \pm - 1 PLC \pm - 2 PLC \pm 0.02 3 PLC \pm - 4 PLC \pm - ANGLES \pm - 		APPLICATION SPEC -	
MATERIAL	FINISH	WEIGHT -	SIZE CAGE CODE DRAWING NO A2 00779 C-788188
CUSTOMER DRAWING			SCALE 2:1 SHEET 1 OF 1 REV C2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[788188-2](#)