


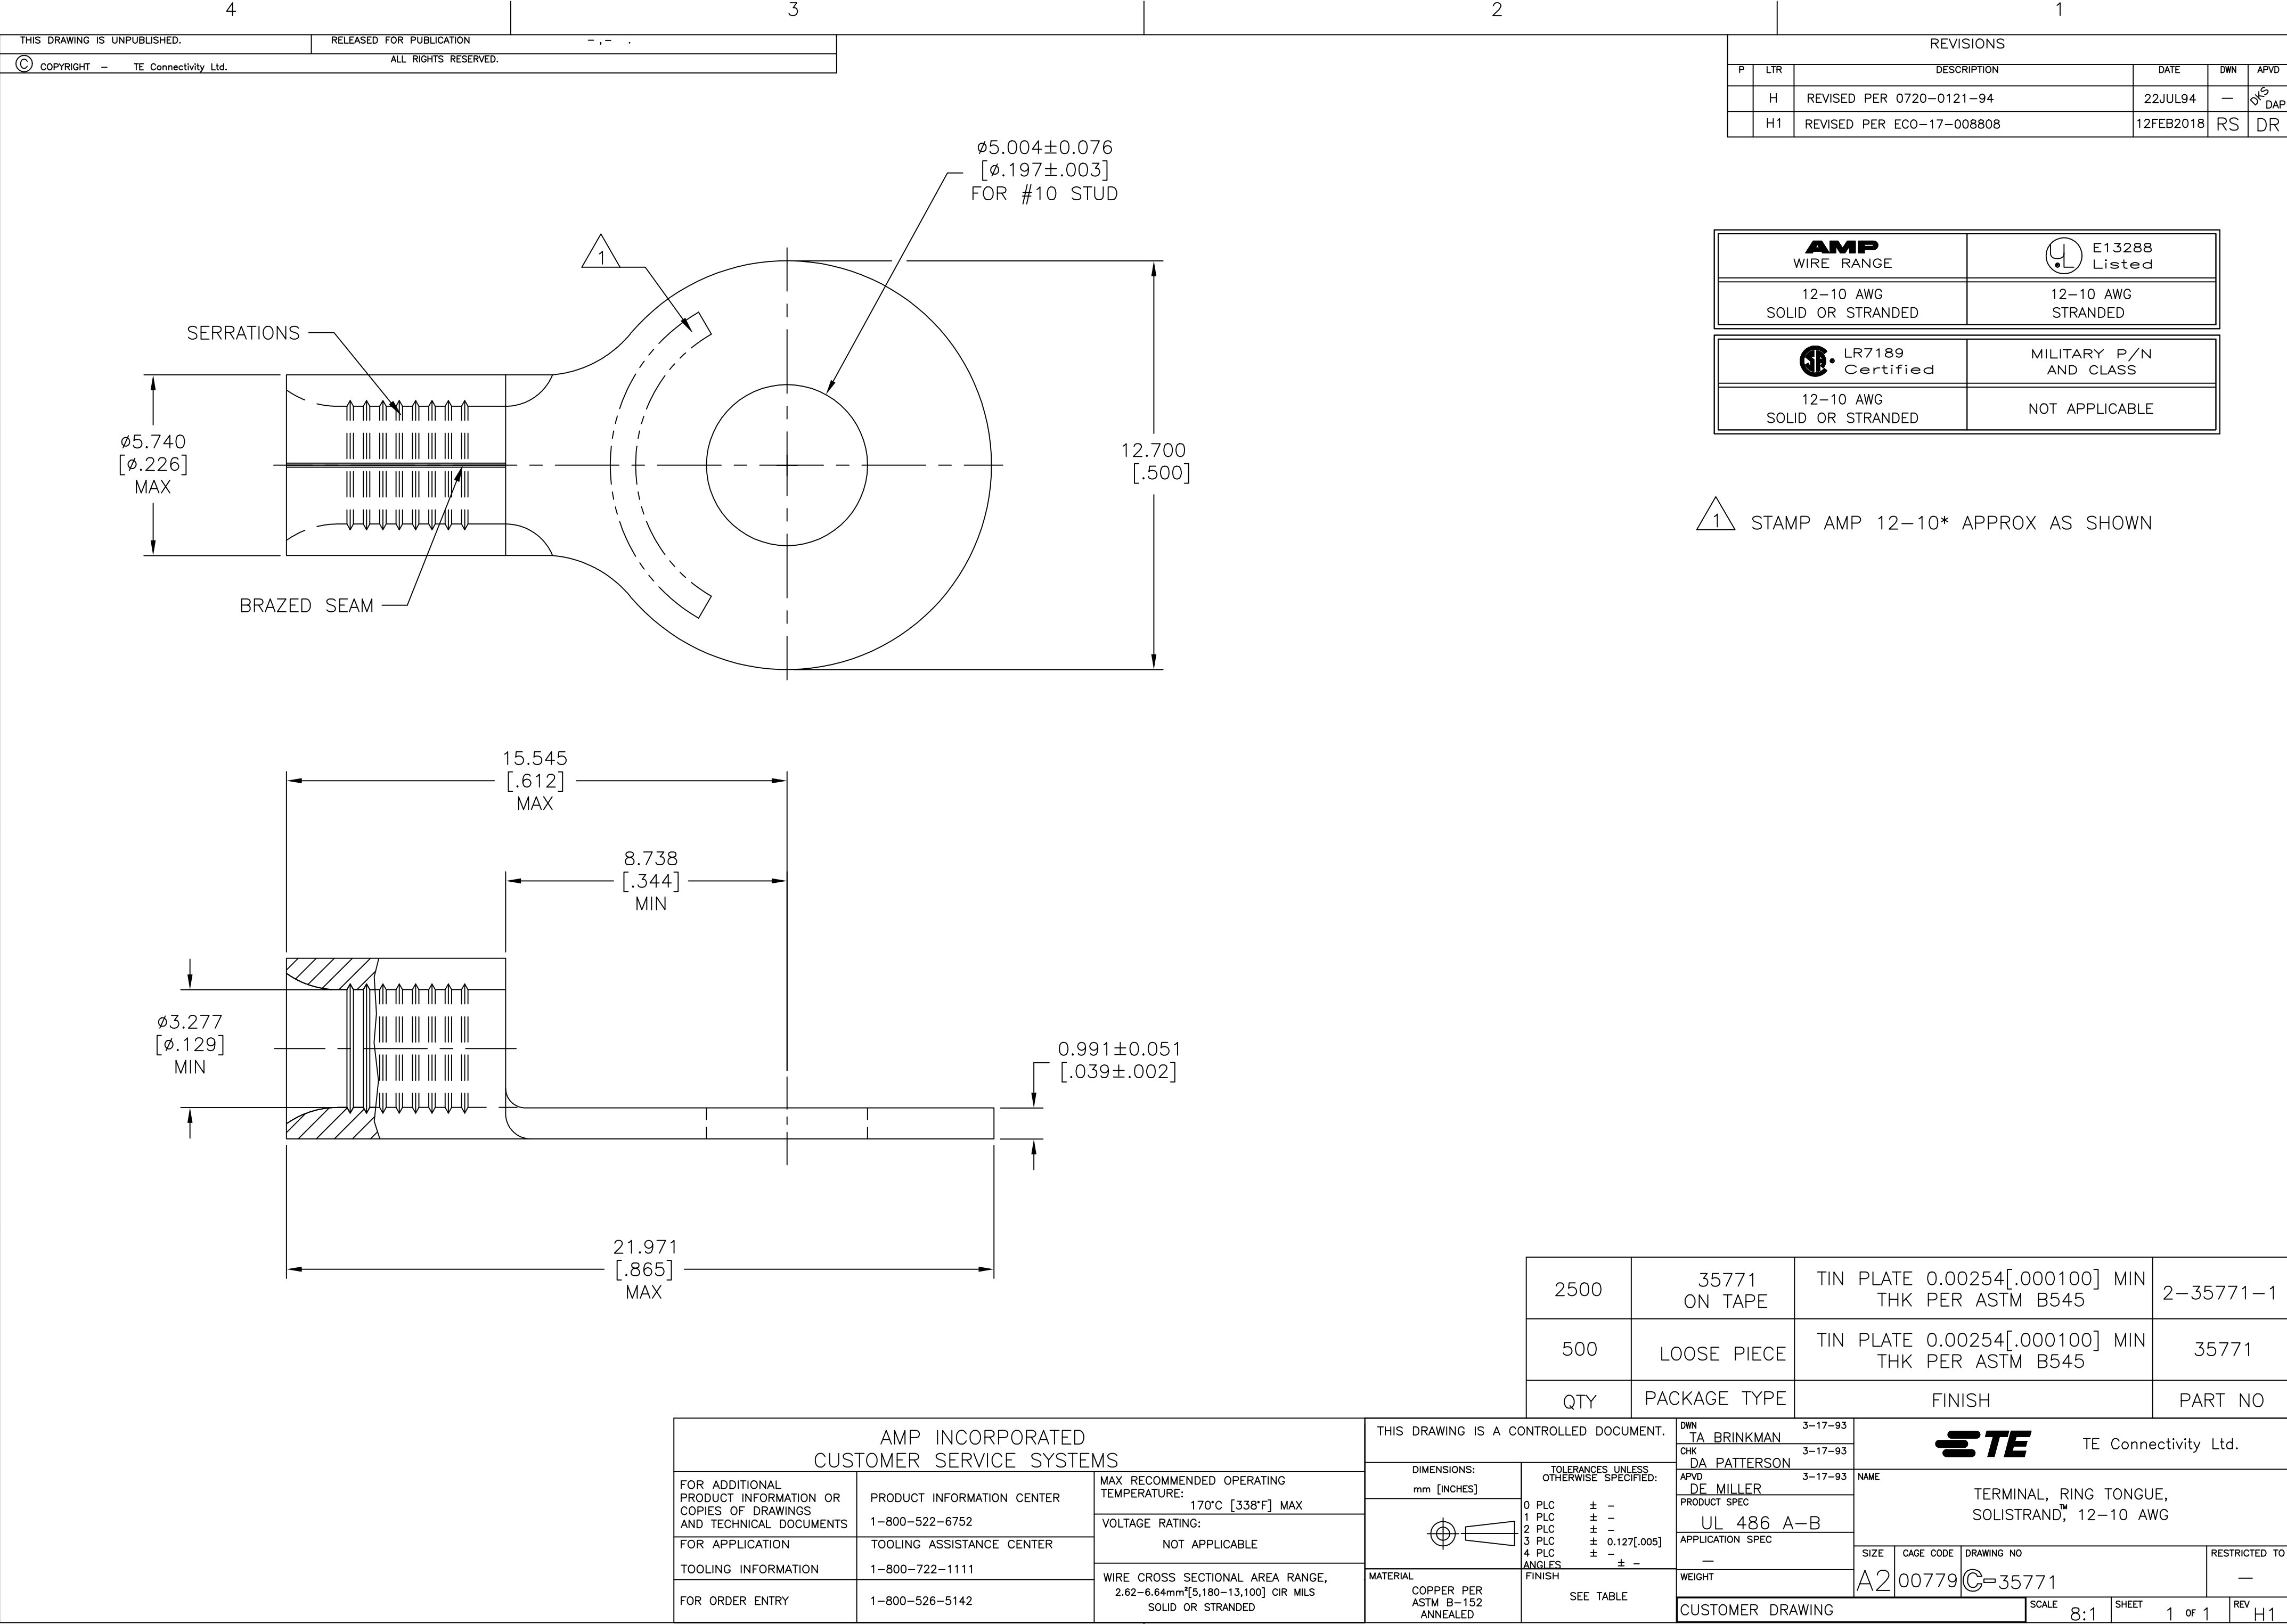

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER 0720-0121-94	22JUL94	—	DA DAP
	H1	REVISED PER ECO-17-008808	12FEB2018	RS	DR

AMP WIRE RANGE	E13288 Listed
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED

LR7189 Certified	MILITARY P/N AND CLASS
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE

1 STAMP AMP 12-10* APPROX AS SHOWN

2500	35771 ON TAPE	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	2-35771-1
500	LOOSE PIECE	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	35771
QTY	PACKAGE TYPE	FINISH	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-17-93	TE Connectivity Ltd.			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK DA PATTERSON 3-17-93				
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± - FINISH	APVD DE MILLER 3-17-93	NAME TERMINAL, RING TONGUE, SOLISTRAND™ 12-10 AWG			
TOOLING INFORMATION	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 2.62-6.64mm²[5,180-13,100] CIR MILS SOLID OR STRANDED		SEE TABLE	PRODUCT SPEC UL 486 A-B				
FOR ORDER ENTRY			MATERIAL COPPER PER ASTM B-152 ANNEALED		APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C=35771	RESTRICTED TO —
CUSTOMER DRAWING						SCALE 8:1	SHEET 1 OF 1	REV H1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-35771-2](#)