

4

3

2



1

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
		A		REVISED PER ECO-11-007502	20APR11	HMR CR

MATERIAL:
HOUSING: POLYIMIDE 6 UL94V-2.
COLOR: NATURAL (OFF WHITE).
TUBULAR CONTACT: BRASS, TIN PLATED.
SCREW: SEE TABLE
WIRE PROTECTOR: STAINLESS STEEL


ELECTRICAL:
CURRENT RATING: 65A, 600V.
WIRE RANGE: 6-14 UL AND 6-22 AWG FOR (CSA)

CONTINUOUS WORKING TEMP.: 100°C MAX.

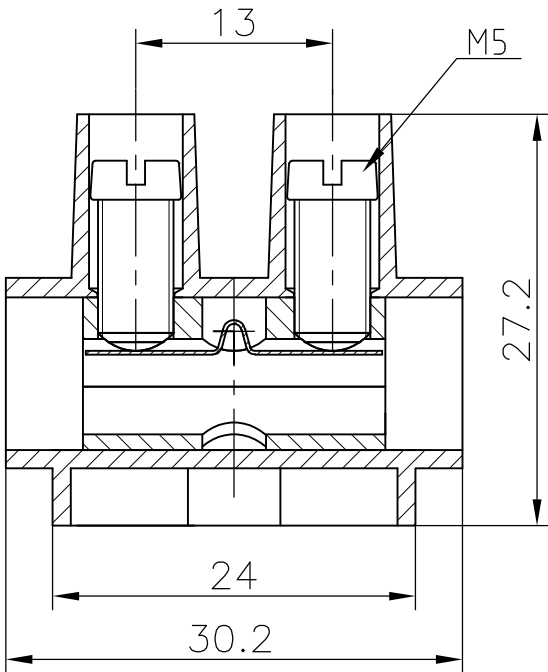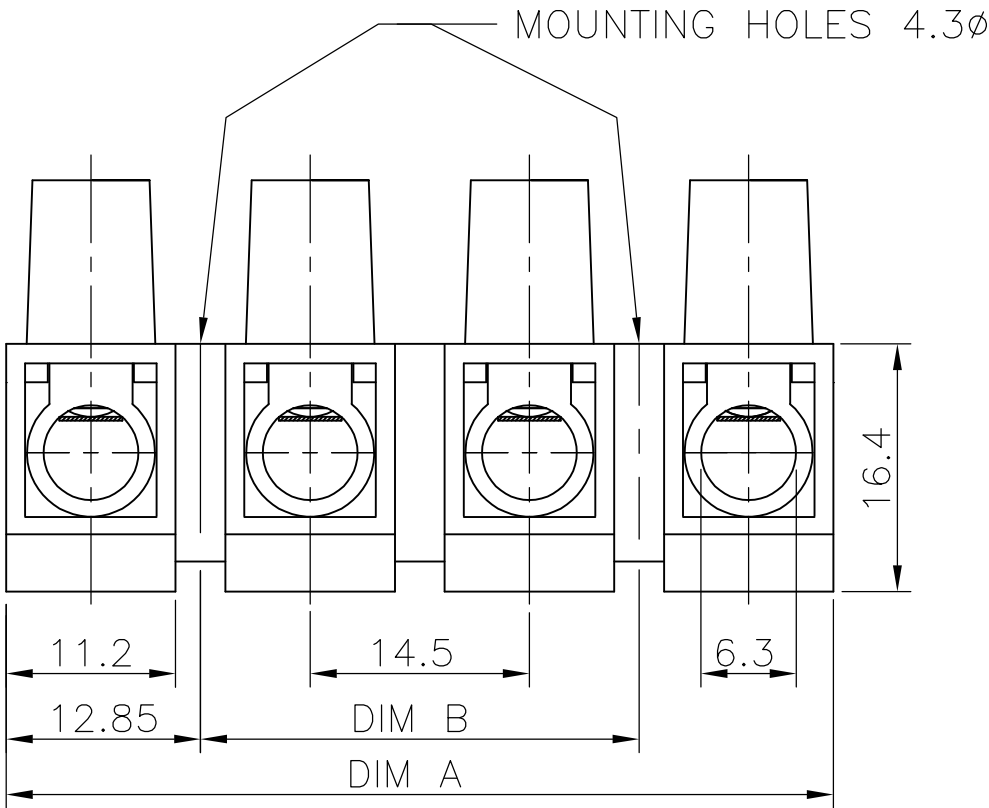

PRELIMIANRY

NICKEL PLATED BRASS	14.5	40.2	TSB200003KDS	2-1776315-3
NICKEL PLATED BRASS	—	25.7	TSB200002KDS	2-1776315-2
TRIVALENT ZINC PLATED STEEL	145	170.7	TSB200012KDS	1-1776315-2
TRIVALENT ZINC PLATED STEEL	130.5	156.2	TSB200011KDS	1-1776315-1
TRIVALENT ZINC PLATED STEEL	116	141.7	TSB200010KDS	1-1776315-0
TRIVALENT ZINC PLATED STEEL	101.5	127.2	TSB200009KDS	1776315-9
TRIVALENT ZINC PLATED STEEL	87	112.7	TSB200008KDS	1776315-8
TRIVALENT ZINC PLATED STEEL	72.5	98.2	TSB200007KDS	1776315-7
TRIVALENT ZINC PLATED STEEL	58	83.7	TSB200006KDS	1776315-6
TRIVALENT ZINC PLATED STEEL	43.5	69.2	TSB200005KDS	1776315-5
TRIVALENT ZINC PLATED STEEL	29	54.7	TSB200004KDS	1776315-4
TRIVALENT ZINC PLATED STEEL	14.5	40.2	TSB200003KDS	1776315-3
TRIVALENT ZINC PLATED STEEL	—	25.7	TSB200002KDS	1776315-2
TRIVALENT ZINC PLATED STEEL	—	11.2	TSB200001KDS	1776315-1
SCREW MATERIAL	DIM B	DIM A	T & B PART NUMBER	TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 3/21/05	 TE Connectivity				
		CHK C RICHARD 3/21/05					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C RICHARD 3/21/05	NAME 14.5MM PITCH WIRE PROTECTOR 65A HIGH VOLTAGE VERSION —				
	0 PLC ± —	PRODUCT SPEC —	SIZE CAGE CODE DRAWING NO			RESTRICTED TO	
	1 PLC ± 0.3	APPLICATION SPEC —					
	2 PLC ± 0.25	—					
	3 PLC ± —	—	A300779C-1776315			—	
	4 PLC ± —	WEIGHT —					
MATERIAL —	FINISH —	CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776315-3](#)