

REV. A
DCO 300860


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	CURRENT: 30 mA MAX.
RESISTANCE	
NOMINAL VOLTAGE	115 VAC - 50-400 Hz
MUST OPERATE	70.0 VAC MAX., 50-400 Hz
MUST RELEASE	25.0 VAC MAX., 8.0 VAC MIN., 50-400 Hz

ENVIRONMENT:	
VIBRATION	33 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES:	OPERATE TIME 15 MS MAX.
	RELEASE TIME 50 MS MAX.
	CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

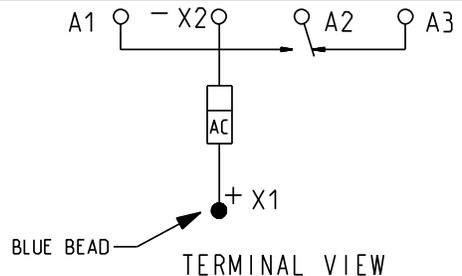

CONTACT RATING:	25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
	50,000 OPERATIONS

DR. B.D. 21MAY2008 CK. J.M.B. 5/21/08



©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. CATALOG ITEM	TE NUMBER
CUST. NO. ---- REV. ----	8-1617748-6

CII PART NUMBER	FC A-125-DY9
-----------------	--------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-125-DY9](#)