

5


4

3

2


1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802


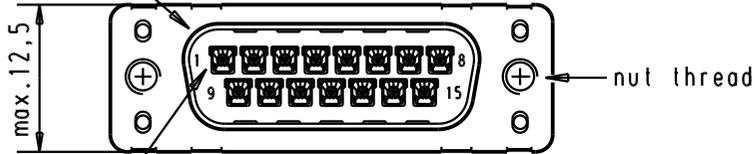


No.1 contact

nut thread

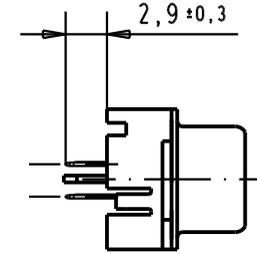


Printed board layout
component side

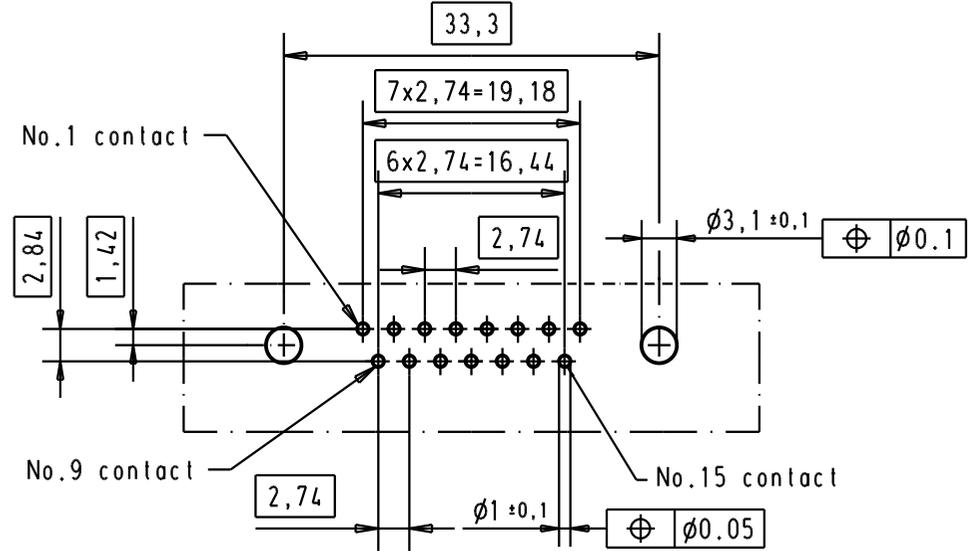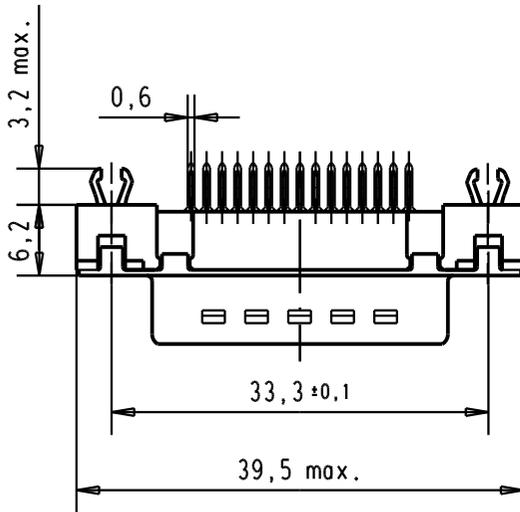

Connector retention and insertion forces on the PCB = 25 / 80 Newtons.

A

09 65 269 3711	M3	1								 All Dim. in mm Orig. Size DIN A 4	D-Sub, High temperature, 15 poles, male, straight, with solder pins 2.9, nuts and grounding board lock	Maßstab/ Scale 1,5:1
09 65 269 6711	M3	2					Detail.	05/03/02	CV			
09 65 269 7711	M3	3					Insp.					
09 65 269 3712	4-40 UNC	1					Stand.					
09 65 269 6712	4-40 UNC	2	31892	22/04/04	JH	HARTING EURL F-95972 Paris				TB 09 65 269 X71X	Blatt/ Page 1 /	
09 65 269 7712	4-40 UNC	3	29723	05/03/02	CV							
Part number	Nut thread	Performance level	Mod.	Dat.	Name				Sub.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09652696711](#) [09652696712](#)