

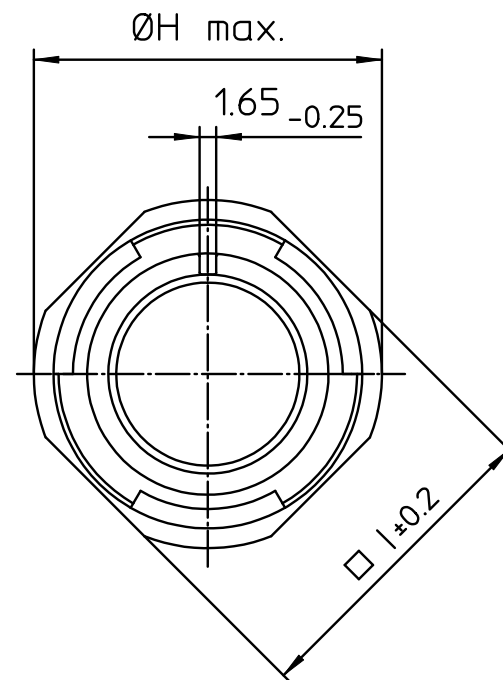


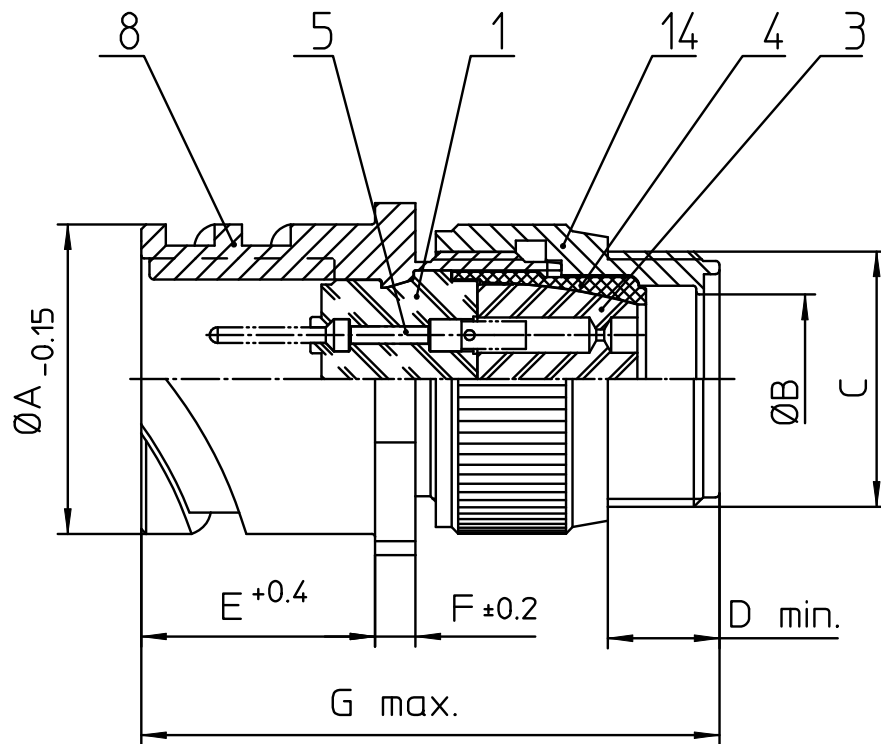

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 32.5              |
| C   | 1 3/4-18UNS-2A    |
| D   | 11                |
| E   | 24.05             |
| F   | 4                 |
| G   | 64                |
| H   | 57.1              |
| I   | 54                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |
| 14  | F-ENDGEHÄUSE / F-ENDBELL            |

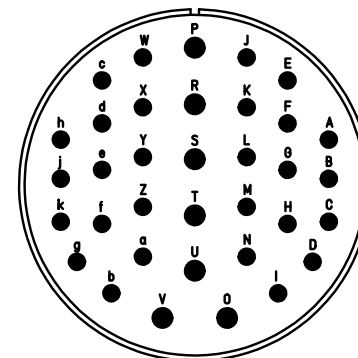

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| Material Specification:                                      |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Hard silver                                 |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3101F32-7P-B  
Cable connecting plug  
Endbell for flex tube  
Solder Cup / Pin / Layout: 32-7

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon



page  
1/1

revision  
1818 9. Apr 20