

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0015445142

Status:


Active

Overview:

C-Grid Connector Products

Description:

2.54mm Pitch C-Grid Receptacle, Through Hole, Dual Row, High Profile, Vertical, High-Temperature, 42 Circuits

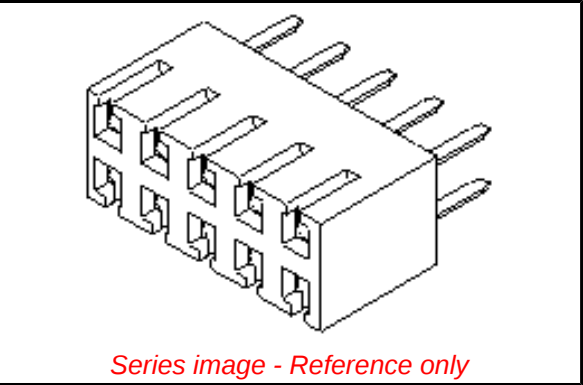

Documents:	
3D Model	Product Specification PS-70181-001 (PDF)
3D Model (PDF)	Application Specification 713080001-AS-000 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Receptacles
Series	71850
Application	Board-to-Board, Signal
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	822350924184
Physical	
Circuits (Loaded)	42
Circuits (maximum)	42
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.442/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ECHA_01_2020 (16 January 2020	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

71850 Series

Mates With

8624 , 70203 , 70246 Straight Header, 70247 Right Angle Header, 70287 , 70289 , 70227 , 70567 , 70280 , 70524 , 70260 , 8723 , 70568 , 8724 , 71764 , 70229 , 70216, 71308

Current - Maximum per Contact	2.5A
Grounding to PCB	No
Voltage - Maximum	500V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	040
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Engineering Number	71850-0212
Reference - Drawing Numbers	
Application Specification	713080001-AS-000
Product Specification	PS-70181-001
Sales Drawing	SDA-71850-0XXX

This document was generated on 03/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

15-44-5142